DOCUMENT RESUME

ED 294 769 SE 049 181

AUTHOR Flemming, N. C., Ed.; Max, M. D., Ed.
TITLE Code of Practice for Scientific Diving: Principles for the Safe Practice of Scientific Diving in Different Environments. Unesco Technical Papers in Marine Science 53.
INSTITUTION United Nations Educational, Scientific, and Cultural Organization, Paris (France). Div. of Marine Sciences.
PUB DATE 88
NOTE 290p.; Must bear note "Reproduced by permission of Unesco." Photographs may not reproduce well.
AVAILABLE FROM Unesco, Division of Marine Sciences, 7 place de Fontenoy, 75700 Paris, France.
PUB TYPE Reports - Descriptive (141) -- Guides - Non-Classroom Use (055)

EDRS PRICE MF01 Plus Postage. PC Not Available from EDRS.
DESCRIPTORS *Aquatic Sports; Diving; *Educational Policy; Environmental Education; *Marine Education; *Occupational Safety and Health; Oceanography; Safety; Science Activities; Science Education; *Standards; Teaching Methods; *Underwater Diving
IDENTIFIERS *UNESCO

ABSTRACT

This publication has been prepared to provide scientific divers with guidance on safe practice under varying experimental and environmental conditions. The Code offers advice and recommendations on administrative practices, insurance, terms of employment, medical standards, training standards, dive planning, safety with different breathing gases and different breathing systems, expedition planning, and guidance for a wide range of different diving environments. Conditions analyzed include: (1) polar diving; (2) cave diving; (3) night diving; (4) diving in the open ocean; (5) diving in surf; and (6) diving at high altitude. Recommendations are also given for the use of various potentially hazardous types of equipment, such as electrical systems, toxic chemicals, and radioactive tracers. The Code does not have the authority of law, and in every country legislation will take precedence over this Code. Nevertheless, it is intended that this document should be compatible with legislation, and should help legislators, diving officers, administrators, heads of laboratories, and divers, to maintain safety at all times. The methods and practices recommended are derived from professional experience at many universities and marine laboratories. There are detailed references to bibliography and addresses of experts. (Author/CW)

****
* Reproductions supplied by EDRS are the best that can be made *
* from the original document. *
****

ED294769

Unesco technical papers
in marine science 53

Code of practice for scientific diving:

Principles for the safe practice of scientific diving in different environments

Compiled and edited by the
Scientific Committee of the
Confédération Mondiale des
Activités Subaquatiques (CMAS)

"PERMISSION TO REPRODUCE THIS MATERIAL IN MICROFICHE ONLY HAS BEEN GRANTED BY

Suzanne Adelung

TO THE EDUCATIONAL RESOURCES INFORMATION CENTER (ERIC)."

U.S. DEPARTMENT OF EDUCATION
Office of Educational Research and Improvement
EDUCATIONAL RESOURCES INFORMATION CENTER (ERIC)

X This document has been reproduced as received from the person or organization originating it.

☐ Minor changes have been made to improve reproduction quality.

• Points of view or opinions stated in this document do not necessarily represent official OERI position or policy.

SE 049 181

BEST COPY AVAILABLE

© Unesco 1988

UNESCO TECHNICAL PAPERS IN MARINE SCIENCE

Numbers 2, 3, 5, 6, 7, 9, 10, 11, 12, 13, 15, 16, 17, 18, 20, 21, 22, 23, 24, 27, 28, 29 and 30, are out of stock.
For full titles see inside back cover.
Numbers 1, 4, 8 and 14 are incorporated in No. 27.

No.		Year	SCOR WG
19	Marine Science Teaching at the University Level. Report of the Unesco Workshop on University Curricula-*Available in Spanish and Arabic*	1974	—
25	Marine science programme for the Red Sea: Recommendations of the workshop held in Bremerhaven, FRG, 22-23 October 1974; sponsored by the Deutsche Forschungsgemeinschaft and Unesco	1976	—
26	Marine science in the Gulf area-Report of a consultative meeting, Paris, 11-14 November 1975	1976	—
31	Coastal lagoon survey (1976-1978)	1980	—
32	Coastal lagoon research, present and future. Report and guidelines of a seminar, Duke University Marine Laboratory, Beaufort, NC, U.S.A. August 1978 (Unesco, IABO).	1981	—
33	Coastal lagoon research, present and future. Proceedings of a seminar, Duke University, August 1978 (Unesco, IABO).	1981	—
34	The carbon budget of the oceans. Report of a meeting, Paris, 12-13 November 1979	1980	WG 62
35	Determination of chlorophyll in seawater. Report of intercalibration tests sponsored by SCOR and carried out by C.J. Lorenzen and S.W. Jeffrey, CSIRO Cronulla, N.S.W., Australia, September-October 1978	1980	—
36	The practical salinity scale 1978 and the international equation of state of seawater 1980. Tenth report of the Joint Panel on Oceanographic Tables and Standards, (JPOTS). Sidney, B.C., Canada, 1-5 September 1980. Sponsored by Unesco, ICES, SCOR, IAPSO. Available in Ar, Ch, F, R, S (*Примечание*: Этот доклад (текст идентичен) был первоначально издан только на английском языке под заголовком *Tenth report of the Joint Panel on Oceanographic Tables and Standards* (Десятый доклад Объединенной группы по океанографическим таблицам и стандартам)). Имеется на арабском, испанском, китайском, русском и французском языках.	1981	WG 10
37	Background papers and supporting data on the Pratical Salinity Scale 1978.	1981	WG 10
38	Background papers and supporting data on the International Equation of State of Seawater 1980.	1981	WH 10
39	International Oceanographic Tables, Vol. 3	1981	WG 10
40	International Oceanographic Tables, Vol. 4.	1982	WG 10
41	Ocean-Atmosphere Materials exchange (OAMEX) Report of SCOR Working Group 44, Unesco, Paris, 14-16 November 1979	1982	WG 44
42	Carbon dioxide sub-group of the joint panel on oceanographic tables and standards. Report of a meeting Miami, Florida, 21-23 September 1981 sponsored by Unesco, ICES, SCOR, IAPSO	1983	—
43	International Symposium on Coastal lagoons Bordeaux, France, 8-14 September 1981 Available in F and S	1982	—
44	Algorithms for computation of fundamental properties of seawater. Endorsed by Unesco/SCOR/ICES/IAPSO Joint Panel on Oceanographic Tables and Standards and SCOR Working Group 51.	1983	—
45	The International System of Units (SI) in Oceanography Report of IAPSO Working Group on Symbols, Units and Nomenclature in Physical Oceanography. (SUN)	1985	—
46	Opportunities and problems in satellite measurements of the sea Report of SCOR Working Group 70	1986	—
47	Research on coastal marine systems Report of the third meeting of the Unesco/SCOR/IABO consultative panel on coastal systems October 1984	1986	—
48	Coastal off-shore ecosystems relationships Final Report of SCOR/IABO/ Unesco Working Group 65 Texel, Netherlands, September 1983	1986	—
49	Pelagic biogeography Proceedings of an international conference The Netherlands 29 May-5 June 1985	1986	—
50	Progress on oceanographic tables and standards 1983-1986: Work and recommendations of the Unesco/SCOR/ICES/IAPSO Joint Panel	1987	—
51	Thermodynamics of the carbon dioxide system in seawater Report by the carbon dioxide subpanel of the joint panel on oceanographic tables and standards	1987	—
52	Research on coastal marine systems. Review and Recommendations for Unesco Programme 1987-1989 Report of the fourth meeting of the Unesco/SCOR/IABO consultative panel on coastal systems, Dakar, 15-17 December 1986	1987	—

Unesco technical papers
in marine science 53

Code of practice for scientific diving:

Principles for the safe practice of scientific diving in different environments

Compiled and edited by the
Scientific Committee of the
Confédération Mondiale des
Activités Subaquatiques (CMAS)

Editors: N.C. Flemming
M.D. Max

Unesco 1988

ISSN 0503-4299

Published in 1988
by the United Nations Educational,
Scientific and Cultural Organization
7 Place de Fontenoy, 75700 Paris

Printed in Unesco's workshops.

© Unesco 1988
Printed in France

Reproduction authorized, providing that appropriate mention is made of *Unesco Technical Papers in Marine Science* and voucher copies are sent to the Division of Marine Sciences.

ABSTRACT

The Code of Practice for Scientific Diving has been prepared by the CMAS Scientific Committee to provide scientific divers with guidance on safe practice under varying experimental and environmental conditions. The Code offers advice and recommendations on administrative practices, insurance, terms of employment, medical standards, training standards, dive planning, safety with different breathing gases and different breathing systems, expedition planning, and guidance for a wide range of different diving environments. Conditions analyzed include polar diving, cave diving, night diving, diving in the open ocean, diving in surf, diving at high altitude, etc. Recommendations are also given for the use of various potentially hazardous types of equipment, such as electrical systems, toxic chemicals, and radioactive tracers. The Code does not have the authority of law, and in every country the legislation will take precedence over this Code. Nevertheless, it is intended that this document should be compatible with legislation, and should help Legislators, Diving Officers, Administrators, Heads of Laboratories, and divers, to maintain safety at all times. The methods and practices recommended are derived from professional experience at many Universities and Marine Laboratories. There are detailed references to bibliography and addresses of experts.

RESUME

Ce recueil de règles pratiques relatives à la plongée scientifique, établi par le Comité scientifique de la CMAS, vise à donner aux plongeurs scientifiques les consignes de sécurité qu'ils doivent respecter dans divers milieux et diverses conditions de travail. Il contient des conseils et des recommandations sur les pratiques administratives, les assurances, les conditions d'emploi, les normes médicales, les niveaux de formation, la préparation des plongées, l'utilisation dans des conditions de sécurité des différents gaz et systèmes de respiration et la planification des expéditions, ainsi que des instructions pour la plongée dans une gamme étendue d'environnements : régions polaires, grottes, de nuit, en haute mer, dans les vagues, en altitude, etc. On y trouve également des recommandations au sujet de l'utilisation de divers types de matériel potentiellement dangereux, tels que les systèmes électriques, les produits chimiques toxiques et les traceurs radioactifs. Le recueil n'a pas force de loi, et dans chaque pays c'est la législation en vigueur qui prévaut. Néanmoins, il a été conçu de manière à être compatible avec cette législation et à aider les législateurs, les responsables de la plongée, les administrateurs, les chefs de laboratoire et les plongeurs à veiller à ce que la sécurité soit assurée à tout moment. Les méthodes et les pratiques recommandées découlent de l'expérience professionnelle acquise dans un grand nombre d'universités et de laboratoires d'océanographie. Il y a des renvois détaillés à la bibliographie et une liste d'adresses d'experts.

6

RESUMEN ANALITICO

El "Code of Practice for Scientific Diving" ha sido preparado por el Comité Científico de la Confederación Mundial de Actividades Subacuáticas (CMAS) para impartir a quienes practican el buceo con fines científicos orientación en materia de seguridad en diversas condiciones experimentales y ambientales. Contiene asesoramiento y recomendaciones sobre prácticas administrativas, seguros, condiciones de empleo, criterios médicos, normas de formación, planificación del buceo, seguridad con diferentes gases de respiración y diferentes sistemas de respiración, planificación de expediciones, así como orientación con respecto a numerosos y diversos medios y circunstancias en que puede practicarse el buceo -regiones polares, cavernas, alta mar, rompientes; buceo nocturno y a gran altitud, etc. Además se formulan recomendaciones para el empleo de diversos tipos de equipo potencialmente peligrosos, como sistemas eléctricos, sustancias químicas tóxicas y trazadores radiactivos. Este Código no tiene autoridad de ley, y en cada país la legislación tiene prioridad sobre él. Su propósito, empero, es que sea compatible con la legislación y que ayude a legisladores, funcionarios, administradores, jefes de laboratorio, y a los propios buzos, a mantener la seguridad en todo momento. Los métodos y prácticas recomendados derivan de la experiencia profesional en numerosas universidades y laboratorios marinos. Figuran referencias detalladas a bibliografías y direcciones de expertos.

РЕЗЮМЕ

Правила подводных погружений были подготовлены Научным комитетом Всемирной конфедерации подводной деятельности (КМАС) в целях обеспечения подводных исследователей указаниями относительно правил безопасности в различных экспериментальных и природных условиях. В Правилах содержатся указания и рекомендации относительно административной практики, страхования, условий найма, медицинских норм, норм профессиональной подготовки, планирования подводных работ, правил безопасности при использовании для дыхания различных газов и различных систем дыхания, планирования экспедиций, а также указания в отношении широкого спектра различных сред, в которых производятся погружения. Анализируются такие условия, как полярные погружения, спелеологические погружения, ночные погружения, погружения в открытом океане, погружения при прибойной волне, высотные погружения и т.д. Даются также рекомендации относительно использования различных потенциально опасных видов материалов и оборудования, таких, как электрические системы, токсичные химические вещества и радиоактивные индикаторы. Правила не имеют силу закона, и в каждой стране законодательство превалирует над этими Правилами. Вместе с тем предполагается, что этот документ должен быть совместимым с законодательством и должен оказать помощь законодателям, руководителям подводных исследований, администраторам, руководителям лабораторий и подводным исследователям в обеспечении безопасности подводных работ в любых условиях. Рекомендуемые методы и практика основаны на профессиональном опыте многих университетов и морских лабораторий. Приводятся подробные ссылки на библиографию и адреса экспертов.

ملخص

أعدت اللجنة العلمية التابعة للاتحاد العالمي لأنشطة الغوص مدونة لممارسات الغوص للأغراض العلمية، بهدف تزويد الغواصين العلميين بالارشادات من أجل ممارسة مأمونة في ظروف تجريبية وبيئية متنوعة. وتقدم المدونة نصائح وتوصيات بشأن الاجراءات الادارية والتأمين وشروط الاستخدام والمعايير الطبية ومعايير التدريب وتخطيط الغوص واحتياجات الأمان لدى استخدام مختلف غازات ونظم التنفس، وتخطيط الحملات، وكذلك الارشاد فيما يتعلق بتشكيلة واسعة من مختلف بيئات الغوص. وتشتمل الظروف التي جرى تحليلها الغوص في المناطق القطبية، وفي المغارات، والغوص الليلي والغوص في أعالي المحيطات والغوص في الأمواج الشاطئية والغوص في المناطق المرتفعة، وما الى ذلك. كما ترد توصيات بشأن استعمال مختلف أنواع المعدات التي تنطوي على أخطار محتملة، مثل النظم الكهربائية، والمواد الكيميائية السامة، والكاشفات الاشعاعية. وليس للمدونة هذه قوة القانون، وستكون للتشريعات في كل بلد الأسبقية على هذه المدونة. وعلى الرغم من ذلك، فان المقصود هو أن تكون هذه الوثيقة متوافقة مع التشريعات وأن تساعد المشرّعين والمسؤولين عن أنشطة الغوص، والمديرين ورؤساء المختبرات والغواصين على ضمان الأمان في جميع الأوقات. وان الطرائق والممارسات الموصى بها مستقاة من الخبرة المهنية في العديد من الجامعات والمختبرات البحرية. وهناك اشارات تفصيلية الى المراجع المتوافرة والى عناوين الخبراء.

摘　　要

《科学潜水业务法规》是世界水下作业联合会科学委员会为指导科学潜水员在各种不同的试验和环境条件下安全作业而制订的。《法规》就行政管理做法、保险、雇用条件、体格要求、培训规格、潜水规划、各种呼吸气体和呼吸系统的安全问题、远洋考察规划提出了意见和建议，并对多种不同潜水环境提出了指导。所分析的各种条件包括极地潜水、洞穴潜水、夜间潜水、大洋潜水、激浪潜水、高水位潜水等。另外还对如何使用诸如电力系统、有毒化学制品及放射性示踪物这些具有潜在危险性的各种设备提出了建议。该《法规》无法律权限，各国的立法对其具有优先性。尽管如此，本文件意在与立法相一致，并帮助立法者、潜水官员、行政人员、实验室负责人及潜水员时时确保安全。所建议的各种方法和做法来自许多大学和海洋实验室的专业经验，并附有详尽的参考书目和专家地址。

PREFACE

This series, the Unesco Technical Papers in Marine Science, is produced by the Unesco Division of Marine Sciences as a means of informing the scientific community of recent advances in oceanographic research and on recommended research programmes and methods.

The texts in this series are prepared in co-operation with non-governmental scientific organizations. Many of the texts result from research activities of the Scientific Committee on Oceanic Research (SCOR) and are submitted to Unesco for printing following final approval by SCOR of the relevant working group report.

Unesco Technical Papers in Marine Science are distributed free of charge to various institutions and governmental authorities. Requests for copies of individual titles or additions to the mailing list should be addressed, on letterhead stationery if possible, to:

Division of Marine Sciences
Unesco
Place de Fontenoy
75700 Paris, France.

The designations employed and the presentation of the material in this document do not imply the expression of any opinion whatsoever on the part of the Unesco Secretariat concerning the legal status of any country, territory, city, or area of its authorities, or concerning the delimitation of its froniers or boundaries. The ideas and opinions expressed are those of the authors and do not necessarily represent the views of Unesco.

NOTICE

Recipients and users of this volume are invited to send their name and address to:

N. C. Flemming
Scientific Committee
CMAS
34 Rue du Colisée
PARIS 75008
FRANCE

if they wish to receive notice of up-dates, revisions, reprints, etc. Commentary and suggestions should be sent to the same address.

FOREWORD

National Codes of Practice for Scientific Diving have existed in several countries since 1970. These documents differ in their context within national legislation, and regional environment, and hence emphasize or omit different factors. Science is international by nature, and marine science involves frequent co-operation between scientists from many countries. It was therefore logical to consider a Code of Practice for the conduct of scientific diving which would combine the expertise of Diving Officers, Administrators, Legislators, and individual divers, from different parts of the world scientific community.

The CMAS Scientific Committee owes a debt of gratitude to the experienced divers who first suggested this Code, Professor Glen Egstrom of the University of California, Los Angeles, and Dr. Nigel Mathers, then of the Heriot-Watt University, Edinburgh. In 1984 Dr. Michael Max, who was then Diving Officer of the Geological Survey of Ireland and Secretary of the Geology Commission of the CMAS Scientific Committee, took on the secretarial and administrative responsibility for editing the Code. Initially over 100 potential contributors in 30 countries were contacted. Whilst many of the replies contained substantial sections (for instance Sections 5 and 11), other replies contained more brief comments and suggestions for new material and new contacts. The final list of contributors is contained in Appendix 4. The CMAS Scientific Committee is extremely grateful to all those people who have searched their knowledge, experience, and judgement, to contribute to this Code.

The preliminary draft of this text was reviewed by a meeting of diving officers from different institutions held at Wakulla Springs, Florida, in November, 1986. These divers reviewed the text individually before the meeting, and then as an editorial team seaking consensus. These people deserve special thanks: Dr. J. Bozanic (Next Generation Services, Inc., U.S.A.); Dudley Crosson (Florida Institute of Technology, U.S.A.); David Dinsmore (NOAA National Undersea Research Program, U.S.A.); Dr. N.C. Flemming (IOS Deacon Laboratory, UK); Michael Lang (Biology Dept., San Diego State University, U.S.A.); R. Palmer (Dept. of Geography, University of Bristol, UK); Hans Roverud (University of Bergen, Norway); P. Sharkey (University of Rhode Island, U.S.A.); Dr. R. Sparks (University of British Columbia, Canada); Dr. Gregg Stanton (State University of Florida, U.S.A.); Dr. B. Townsend (Fisheries and Oceans, Canada).

The Scientific Committee of the World Federation of Underwater Activities (CMAS) thanks all those people mentioned above who helped to produce this Code, and acknowledges the help and advice given by many other people through letters or oral comments. Wherever possible these practical hints and observations have been incorporated into the final text.

TABLE OF CONTENTS

INTRODUCTION 1
I. Objectives 1
II. Origins of this Code. 1
III. Contents and limitations. 2
IV. Liability for use 3
V. Notes on terminology. 3

SECTION 1. INTERNATIONAL LAW OF THE SEA 5
1.1. United Nations Convention, limits of jurisdiction and Council of Europe 5
1.2. International recognition of diving training certificates. . . 6
1.3. Co-operative projects 6

SECTION 2. NATIONAL LEGAL ASPECTS AND ADMINISTRATION 7
2.1. Introduction. 7
2.2. Examples of national legislation. 7
2.3. Discussion 14
2.4. Examples of Codes of Practice. 14
2.5. Insurance 15
2.5.1. Introduction. 15
2.5.2. Classes of risk 16
2.5.3. Standard group insurance policies 16
2.6. Equivalent job titles 17
2.7. Qualification records and authorization to dive 17
2.8. Pay 18
2.9. Volunteers 18

SECTION 3. ORGANIZATION 21
3.1. Chain of command and responsibilities 21
3.1.1. Corporate responsibility [Level 1] 21
3.1.2. Diving Control Board [Level 2] 21
3.1.3(a). Diving Officer [Level 2] 22
3.1.3(b). Diving Officer [Level 3] 22
3.1.4. Chief Diver/Diving Officer's Appointee [Level 4] . . . 23
3.1.5. Chief Scientist/Project Leader/Principal Invesigator . . 23
3.1.6. Dive Marshall/Dive Supervisor/Dive Master/Person in Charge [Level 5] 23
3.1.7. Dive Leader [Level 6] 24
3.1.8. Diver [Level 7] 24
3.1.9. Trainee/Diver-in-training [Level 8] 25
3.1.10. Temporary Diver 25
3.1.11. Ship's Master 25
3.2. Delegation of duties. 26
3.3. Diving with other groups. 26

SECTION 4. TRAINING AND MEDICAL EXAMINATIONS 27
4.1. Introduction. 27
4.2. Medical certificates. 27
4.2.1. Minimum requirements for medical certificates 27
4.2.2. Levels of medical certification 28
4.2.3. Other medical certificates 28
4.2.4. Decompression training 28

4.2.5. Gender factors in diving. 29
4.2.6. Pregnancy and diving. 29
4.2.7. Confidentiality of medical reports. 31
4.3. Fitness 31
4.4. Swimming pool and sea training schedules. 32
4.5. Theoretical knowledge 33
4.6. Qualification standards and working depths 33
4.7. Dive record sheets 33
4.8. Log books 34
4.9. In date qualifications and work-up dives. 34
4.9.1. In-date readiness system. 34
4.9.2. Work-up dives. 34
4.10. Team compatability 35
4.11. Compression chamber dry dives 36
4.12. Recognition of other training qualifications. 36
4.13. Mixed gas training 37

SECTION 5. EQUIPMENT MAINTENANCE 38
5.1. Introduction. 38
5.2. Statutory requirements 38
5.3. Technical and maintenance procedures. 38
5.3.1. Scuba tanks and other refillable gas cylinders 39
5.3.2. Scuba regulators and submersible pressure gauges. 39
5.3.3. Depth indicators (gauges) 39
5.3.4. Compressors and storage banks 40
5.3.5. Underwater tools. 40
5.3.6. Special equipment 41
5.4. Records of maintenace, checks, tests and repairs. 41

SECTION 6. SAFETY. 42
6.1. Pre-dive safety 42
6.1.1. Dive planning 42
6.1.2. Personal equipment maintenance 43
6.1.3. Purity of air and gas supply. 44
6.1.4. Fire risk 46
6.1.5. Food and drink 47
6.1.6. Alcohol 47
6.1.7. Sleep and fatigue 48
6.1.8. Cold. 48
6.1.9. Heat. 49
6.1.10. Drugs 49
6.2. On-dive safety 51
6.2.1. Dive safety responsibility 51
6.2.2. Compatability of equipment 51
6.2.3. Numbers of divers. 52
6.2.4. Diving from shore. 53
6.2.5. Diving from small boats 54
6.2.6. Diving from large boats 54
6.2.7. Ropework, terminology, and use of ropes 55
6.2.8. Buddy lines 56
6.2.9. Life lines 57
6.2.10. Shot (buoy) and sweep lines 57
6.2.11. Safety and equipment helmets. 58

6.2.12. Communications 58
6.2.13. Recall signals 60
6.2.14. Homing gear 60
6.2.15. Buoyancy control. 60
6.2.16. Free ascents. 61
6.2.17. Perceptual deprivation underwater 61
6.2.18. Narcosis and decision making. 62
6.2.19. Decompression meters and computers. 63
6.2.20. Electronic instrumentation 65
6.3. Post-dive safety. 65
6.3.1. Diver location aids 65
6.3.2. Diver recovery equipment. 66
6.3.3. Life-saving and artificial respiration 66
6.3.4. Emergency situation procedures 68
6.3.4.1. Emergency diving equipment on research vessels 68
6.3.4.2. Action during an emergency situation. 68
6.3.4.3. Reporting procedures. 69
6.3.5. Evacuation by helicopter or aircraft. 71
6.3.6. Radio procedures. 72

SECTION 7. DIVING SYSTEMS OTHER THAN SELF-CONTAINED AIR 73
7.1. Introduction. 73
7.2. Scuba, mixed gas, surface demand, and other systems . . . 73
7.3. Surface demand air and mixed gas. 74
7.4. Underwater habitats 75
7.4.1. Introduction. 75
7.4.2. Saturation diving 75
7.4.3. Safety considerations in saturation 76
7.4.4. General procedures 76
7.4.5. Emergency procedures. 77
7.4.6. Health care 77
7.4.7. Hazardous materials 78
7.4.8. Excursion diving. 78
7.4.9. Decompression after saturation 78
7.5. Lockout submersible 78
7.5.1. Design principles and applications 79
7.5.2. Operational procedures 79
7.6. Oxygen closed-circuit 80
7.7. Oxy-helium and bell diving 80
7.7.1. General principles 81
7.7.2. Guidance for operations 81
7.7.3. Legislative requirements. 82
7.8. Oxy-nitrogen self-contained mixed gas, modified air . . . 82
7.9. Multiple mixture diving, tri-mix. 83

SECTION 8. DIVING IN SPECIAL AND EXTREME CONDITIONS 84
8.1. Introduction. 84
8.2. Environmental situations and extremes 84
8.2.1. High altitude 85
8.2.2. Polar environments and under ice. 86
8.2.3. Cold water 90
8.2.4. Mid-ocean (Blue water diving) 94
8.2.5. Oceanic coral atolls. 95
8.2.6. Coral reefs and fringing reefs 96

8.2.7. Surf and rough seas 97
8.2.8. Fast currents 99
8.2.9. Night diving 100
8.2.10. Kelp and other seaweed 101
8.2.11. Pinnacle and seamount diving. 102
8.2.12. Sharks 103
8.2.13. Dangerous marine animals (other than sharks). 104
8.2.14. Diving near very large animals 105
8.2.15. Diving in remote locations and on coasts of difficult access. 107
8.2.16. Negative altitude diving, surface below sea level . . . 108
8.2.17. Diving in zero and low visibility 109
8.2.18. Confined spaces and vertically restricted environments . . 110
8.2.19. Cave diving 110
8.2.20. Noxious gas in bottom water 112
8.2.21. Deep diving on air 113
8.2.22. Warm and hot water (Sabkha) 114
8.2.23. Super saline water 115
8.2.24. Lagoons and estuaries 116
8.2.25. Holiday environment 116
8.2.26. Whirlpools 117
8.2.27. Underwater volcanoes and igneous intrusions 118
8.2.28. Hot springs (potentially dangerous hot water) 119
8.3. Artificial, experimental and unusual situations 120
8.3.1. Fish tanks, cages, farms, shellfish, rafts:
Diving in enclosures and other containers . . . 120
8.3.2. Support, launch and recovery of gear. 122
8.3.3. Locks, culverts, ships' propellors or hydraulic inlets . . 124
8.3.4. Diving underway 124
8.3.5. Diving on towed fishing nets. 125
8.3.6. Diving from large ships 128
8.3.7. Severely contaminated water; toxic and non-aqueous liquids . 130
8.3.8. Sewage contaminated water 131
8.3.9. Polluted water and estuarine conditions 132
8.3.10. Reactor shielding tanks 132
8.3.11. Offshore platforms 132
8.3.12. Electrical fields 133
8.3.13. With large or dangerous animals in aquariums. 135
8.3.14. Shipping lanes and fishing grounds 137
8.3.15. Subterranean artificial environments. 138

SECTION 9. BOATS AND SAFETY EQUIPMENT. 140
9.1. Introduction. 140
9.2. Suitable vessels and support boats 140
9.3. Safety equipment carried on board 141
9.4. Range of operating conditions 142
9.5. Diver recovery aids 143
9.6. On board compression chambers 144

SECTION 10. SPECIAL EQUIPMENT 145
10.1. Towed sledges 145
10.2. Wet diver transport vehicles, diver propulsion vehicles (DPV) 146
10.3. Remote Controlled Vehicles (RCV). 148
10.4. Use of explosives 149
10.5. Use of electricity underwater in equipment and experiments . 152

10.5.1. Units powered from surface or remote batteries 152
10.5.2. Units powered by self-contained batteries 152
10.5.3. Other hazards with batteries. 153
10.5.4. Precautions when handling equipment on boat or surface . . 154
10.6. Use of radioisotopes and radioactive chemicals 154
10.6.1. Relevant authorities and literature 154
10.6.2. Legal requirements and recommendations 154
10.6.3. Accidental spillage or loss of radioactive samples . . . 155
10.6.4. Protection of divers from radiation sources 155
10.6.5. Disposal of waste 156
10.7. Use of acoustic energy 156

SECTION 11. DECOMPRESSION 157
11.1. Introduction. 157
11.2. The compression phase 157
11.3. The decompression phase 159
11.4. Standard air decompression 159
11.5. Diving in remote areas 161
11.6. Post-dive precautions 162
11.7. Decompression tables. 162
11.8. Repetitive diving 163
11.9. Surface decompression 165
11.10. Diving and altitude 165
11.11. Exercise post-dive 165
11.12. Helium and oxygen mixture diving. 165
11.13. Decompression sickness 165
11.13.1. Classification of decompression sickness. 166
11.13.1.1. Simple decompression sickness: Type 1 166
11.13.1.2. Serious decompression sickness: Type 2 167
11.14. Therapy in decompression sickness 167
11.14.1. Recompression 168
11.14.2. Oxygen 168
11.14.3. Helium and oxygen mixtures 168
11.14.4. Fluid therapy 169
11.14.5. Drug therapy. 169
11.15. Recompression tables. 169
11.16. Therapy in the absence of a recompression chamber . . . 169

SECTION 12. SITUATIONS NOT COVERED BY THIS CODE 170

APPENDICES
1. Directory of Institutes with diving programs. 171
2. References and selected bibliography. 174
3. References to decompression tables 190
4. Addresses of contributors (and Section Contacts). . . . 191
5. Section contacts. 195
6. Accident reporting forms. 198
7. CMAS qualification equivalents 210
8. Addresses of Scientific Diving Associations 215
9. Medical forms and waiver forms 216
10. Scientific diver Brevet application forms 235
11. Extended local rules. 237
12. Sample dive record sheets 238
13. Science diver training standards and certification . . . 243

14. Glossary of selected terms and definitions 249

TABLES

2-1. Examples of equivalent job titles. 20
4-1. Recommended schedule of work-up dives for various working depths after a break from active diving . . 35
6-1. Air purity standards 45
8-1. Formulae for depth adjustments at altitude 85
8-2. Rope signals 89
10-1. Explosives recommended for underwater use. 151
10-2. Evolution of gases from batteries 153
11-1. Arterial and venal gas tension values. 159
11-2. Diving table ascent rates. 161
11-3. Dive characteristics and compression chamber requirements. . 162

FIGURES

6.2.7.a. Divers working from ropes and lines that allow the divers to work on or up from the bottom . . 56a
6.2.7.b. Divers working from ropes and lines that have no component of interaction with the bottom. . . . 56b
8.1. Surface boat with operator, down line array, safety diver and three working divers conducting a blue water dive 94a

PHOTOGRAPHS

1. Divers working on an archaeological wreck off the coast of Norway 40a
2. Another view of the Norwegian wreck, showing the array of equipment, etc. 40b
3. A diver testing and sampling sediment over wreck using a geological auger 40c
4. Divers launching a dive boat in heavy surf 98a
5. Diver working on the supporting wires around the plastic walls of a fish farming cage. 120a
6. Diver descending the supporting wires on the outside of a fish enclosure. 120b
7. Divers are needed in several stages of the launch and recovery of scientific research submersibles. . . 122a
8. In preparation for scientific work at sea it is sometimes necessary for divers to work in laboratory tanks to test equipment and procedures 122b
9. A tape recorder is valuable for recording a verbal record of visual observations and measurements. 126a
10. Terminology of parts of a trawl net 128a
11. Otter board moving over the sea bed 128b
12. A diver swims over the mouth of a trawl net 128c
13. Close-up picture of a trawl in action. 128d
14. A scientific diver moves over the trawl observing fish in net 128e
15. Diver wearing a dry-suit with integrated face-mask and mouthpiece 132a

INTRODUCTION

I. Objectives

The international Code of Practice for Scientific Diving is designed to meet the following objectives:

1. To provide guidance on the safe practices in scientific diving, based on information and documents from experts in many countries.

2. To benefit from the specialized experience of scientific divers in many countries, so as to provide the best advice on diving in different unusual or extreme conditions.

3. To provide the basis for mutual recognition of standards between countries and between institutions, so that scientific divers can move more freely and cooperate more efficiently at an international level.

4. To create an agreed voluntary standard of reference on scientific diving practice, thus avoiding the necessity for restrictive legislation to control diving safety.

5. To provide a bibliography, references to accepted codes and manuals, address lists and other reference sources for scientists wishing to establish a scientific diving program.

6. To provide guidance concerning legislation in those countries which have laws controlling scientific diving.

7. To provide an ethical basis for establishing diving procedures in conditions where diving has never been practiced before.

8. To strengthen the international community of scientific divers, and to support a general approach to maintaining safety which can evolve as technology evolves, without the rigidity of a mandatory legal document.

II. Origins of this Code

The Scientific Committee of the World Federation of Underwater Activities (Confédération Mondiale des Activités Subaquatiques, or CMAS) held a meeting in Stockholm in 1977 to discuss the effects of national diving safety legislation on scientific diving in different countries. Examples of legislation and codes of practice were collected, and advice was sought from many experts. Later in 1977, during the General Assembly of CMAS in Brisbane, Australia, a discussion meeting on codes of practice voted unanimously in favour of the development of an international Code of Practice, which would serve as general guidance of a non-legislative, non-mandatory nature, and would be suitable for use in all countries.

At the Scientific Symposium of CMAS in Edinburgh, Scotland, U.K. in 1980 a start was made on drafting the contents of such a Code. In 1982, at the Joint Oceanographic Assembly of the Scientific Committee for Oceanic

Research (SCOR), in Halifax, Canada, the subject was discussed with Dr. Selim Morcos of the UNESCO Marine Sciences Division. In 1983 CMAS made application to the UNESCO Marine Science Division supported by SCOR, for financial support to produce the Code of Practice for Scientific Diving. Approval was granted.

A Code of Practice operates at a level between legislative rules and a diving manual. Legislation is usually written by persons trained in law, tends to be brief, very factual, mandatory, to concentrate on forbidding undesirable actions and to be deliberately general so as not to depend upon rapid changes in technology. A change in legislation usually takes several years. On the other hand, a diving manual is written by persons with experience of diving, is extremely technical, expounds in detail upon the construction and use of equipment, contains great detail upon training methods and techniques and may be revised at short intervals. A diving manual also tends to discuss only those diving methods which are relevant in the geographical area to which it applies.

This Code of Practice bridges the gap between these two kinds of document, by giving discretionary advice based on the wide experience of many experts. It seeks to give positive information on techniques which are useful, rather than only to forbid. Where manuals and codes already exist giving detailed professional information, the Code provides reference, and a very brief review of the subject.

This is not a theoretical treatise. Each section of the Code has been drafted by a person or persons who have practical experience of the system and particular conditions described. The names and addresses of contributors are listed in the Appendix 2. The entire text has been revised at several meeting of groups of experts, and by the editors. No section should be attributed to any one author.

III. Contents and limitations.

The contents of this Code have been selected by examination of existing national and institutional documents, combined with special topics suggested by experienced scientific divers, plus consideration of the unique problems which arise from designing a text to be used internationally.

Wherever possible the views expressed in this Code are designed to be compatible with the treatment of the same topic in existing documents. In no sense is this Code intended to replace or supercede the more detailed treatments given in technical manuals. National legislation in any country takes precedence over recommendations and advice in this Code.

This Code does not apply to diving operations performed solely for sport or recreation.

This Code does not apply to commercial or industrial diving operations conducted in connection with construction, offshore petroleum, engineering, harvesting, cultivation or any other forms of commercial underwater work and employment.

This Code does not contain information on scientific methods or techniques which can be used in the application to specific scientific problems underwater.

The first aid procedures discussed in this Code are not exhaustive and are not intended to replace first aid manuals.

IV. Liability for use.

The information given in this Code is given in good faith, and is based on the best experience available at this time. No liability can be accepted by the Confédération Mondiale des Activités Subaquatiques, its component bodies, officers or agents, or the contributors, or by UNESCO for any loss, damage or injury suffered directly or consequently as a result of any diving activity or any related activity during which this Code was being used. Notwithstanding the professional and accurate information provided in this Code, many sections describe techniques that should not be attempted without consultation with the references cited. It is advisable to contact scientists who have already used these techniques in their research. The information contained in this Code consists of summary guidelines, and a reference to sources. It should not be treated as sufficient on its own as a manual to conduct diving operations.

In publishing the information set forth in this Code, the CMAS assumes no liability not otherwise imposed by law. Each diver is assumed in the context of this Code to be voluntarily performing activities for which he/she assumes all risks, consequences and potential liability, unless otherwise agreed by contract with the employer of the diver.

V. Notes on terminology

Whatever the circumstances, the basic principle adopted in this Code is that existing practice and codes should be adhered to wherever possible. The recommendations of this Code are largely supplementary to other documents so as to provide safe regulations in all circumstances.

In the drafting of each section of this Code it is assumed that all other relevant sections are also being complied with; that is, that divers have been trained to the required level on the equipment to be used, and that where two or more special conditions apply, e.g. under ice and in a remote area, the recommendations of both sections will be followed.

The terminology in the Code has not been standardized rigidly, since agreed definitions of many terms do not exist, and it would be arbitrary and cumbersome to attempt this task. However, various phrases are used where instructions or recommendations are given, and should be interpreted as follows;

MUST - There are no circumstances under which this recommendation may be ignored, e.g. Section 7.6; "Diving MUST be conducted in accordance with a recognized Navy Diving Manual".

WILL/SHALL - Other than in exceptional circumstances this recommendation should always be followed, e.g. Section 6.1.2; "All diving equipment SHALL be inspected by the diver for proper functioning at the beginning and end of each diving day".

SHOULD - Normal diving practice requires that this recommendation be obeyed but there may be circumstances in which it is appropriate to relax it, e.g. Section 6.3.4.3. "The fullest possible report SHOULD be compiled by the Dive Marshal and submitted to the Diving Officer".

CAN/MAY - Scientific diving may well benefit from employing this technique, e.g. Section 7.8; "Oxy-nitrogen mixtures MAY be used to provide longer endurance with a compact set at greater depths than those attainable with oxygen".

SHOULD CONSIDER - A helpful hint that may indicate only a personal preference.

Technical terms, abbreviations, and acronyms used in this text are defined in Appendix 14.

All measurements, especially depth, are referred to in meters, and other SI units where appropriate. Measurements in feet, used for instance with reference to the U.S. Navy air decompression tables, are also referred to in the metric system where appropriate.

At several points in this Code there are references to equipment, boats, proprietary drugs, and other items described by proprietary or brand name. This has been done only in crder to give specific examples, or to make the discussion clear. Such references do not imply any approval, endorsement, recommendation, or condemnation of any product or material.

Spelling, in general, follows North American usage.

Numbers in brackets (8.3.28.) in the text are cross-references to other sections in this Code.

SECTION 1. INTERNATIONAL LAW OF THE SEA

1.1. United Nations Convention, Limits of Jurisdiction & Council of Europe.

In 1982 the United Nations Convention on the Law of the Sea (UNCLOS) (The Law of the Sea, Official Text 1983, published by Croom Helm, and St.Martin's Press, for the United Nations) was signed in Jamaica. The Convention document has to be ratified by national legislatures before it becomes international law, but in the meantime it may be regarded as a norm to which many countries adhere in principle, in whole or in part.

There are no specific references to diving at sea in UNCLOS but there are many references to the conduct of marine scientific research. When scientists from one country conduct research on a ship which enters into the Exclusive Economic Zone (EEZ) or the Territorial Sea of another country, there are many obligations concerning notice of intent to conduct research, offer to accept observers, and sharing the data which result. Much diving research is conducted from the shore, and when diving is conducted in foreign countries, scientists often work in collaboration with colleagues from the laboratories of that country. When direct collaboration is not involved, there may still be a requirement to obtain permits to dive from the civilian or military authorities.

The key point to note is that the UNCLOS requires that, even if you do not land or enter within territorial waters, you should obtain permission to conduct diving research if you are within an EEZ, which commonly has a width of at least 200 miles.

Outside the EEZ the waters are international High Seas, and the obligations of scientific divers are the normal ones of prudence and safety. The legal regime will be determined by the flag of registration of the vessel.

There are sections of UNCLOS relating to marine archaeology (Articles 149, 303). Article 149 describes artifacts found in the International Areas of the seabed. Article 303 encourages states to enforce national legislation on the protection of submarine cultural artifacts out to a distance of 24 miles from their coasts.

Council of Europe. The Council of Europe has drafted a Treaty on the Protection of the Underwater Cultural Heritage. The membership of the Council of Europe extends from Sweden and Norway to Spain and Turkey, including all the coasts of Europe with the exception of Albania. The Treaty requires the strict reporting of any archaeologic finds, and very strict control of site disturbance, which must be supervised by officially appointed or approved archaeologists. If in doubt, documents can be obtained from the Council of Europe, Strasbourg, France.

1.2. International Recognition of Diving Training Certificates

Several national organizations produce diving training qualification records (2.7) or identity cards which are recognized beyond their national boundaries. The American "C" card, which is issued by several certifying agencies, is widely recognized as a sports diving qualification. Some large scientific laboratories and university marine science departments, especially in the USA, run their own scientific diving programs, and issue recognized qualification documents. Specialized groups, such as cave diving groups, provide qualification records that are specialized and restricted only to the relevant kind of diving or environment. At a truly international level CMAS produces certificates which are linked to national standards by a procedure of equivalence. This is restricted primarily to sports diving training using scuba equipment, (See Appendix 13), although the 3-Star standard is accepted as suitable for scientific diving in almost all countries.

Since the conditions of work, insurance (2.5) and legal liability are different for an employed person, as opposed to a sports diver on vacation, CMAS introduced in 1980 a certificate for Scientific Divers (4.12; Appendix 10). This certifies internationally that the holder is authorized to work as an employed scientific diver in a place of research in their country of origin. The Scientific Diver Brevet is only issued to a diver who already holds the CMAS 3-Star Diver qualification. Countries which have a very strict regime of legal and insurance requirements for scientific diving may not regard the CMAS Scientific Diver card as sufficient proof of status. However, the card is an international guarantee of one simple fact: the holder is authorized to dive at work as a scientist in the country of origin. That guarantees a certain minimum status, after which further enquiries may clarify special details. Application forms for the Scientific Diver Brevet can be obtained from: CMAS, 34 rue du Colisée, Paris 75008, France.

1.3. Cooperative Projects.

Some of the most effective diving research programmes have been multi-national. In the planning of such a project it is vital to ensure that such aspects as legal responsibilities and liabilities are fully understood, and that all parties know what legal regime applies in the area of work. Insurance standards should be clearly stated, both personal accident and third party liability.

In the planning of multi-national projects, due regard must be paid to the probability that divers will be used to different types of equipment and methods of use. Time should be allowed for familiarization. It is essential that the Dive Supervisor in charge of on-site diving and the Diving Officer of the host establishment make clear to all divers what rules and Code of Practice(s) are to be used. This is especially important when divers from several institutions or countries join to work on a research ship. There must be formal briefings to establish the rules to be used and, if necessary, practice dives together, no matter how experienced the individual divers. The hallmark of a good scientific diver is an ability to support the diving team and improve its productivity by increased teamwork and efficiency, not to promote small, procedural points of particular diving practice.

SECTION 2. NATIONAL LEGAL ASPECTS AND ADMINISTRATION

2.1. Introduction

The purpose of this section is to describe and compare briefly the legislative regimes in a few countries. The subjects raised, and documents referred to, cannot be exhaustive, but they illustrate the topics which are the subject of legislation in many countries. In countries where no legislation at present controls the standards of either working diving or sports diving, the documents referred to here may serve as guidance as to what standards are desirable, and what would be excessive. A fuller review of these topics is given by Flemming (1985).

Regulations concerning diving safety and training are designed to apply to nationals in each country. Regulations do not usually contain any specific reference to the qualifications required of visiting divers from other countries. It is reasonable to assume that host institutes will check that visitors' standards are comparable with their own, and in many institutes there are established procedures and forms for making these checks. Foreign diving teams working without a host organization will probably dive according to their own regulations. In these circumstances they should still check to make sure that their practices will be compatible with those of the host country.

Traditionally most countries have only had diving laws which protected antiquities, or installations of a military nature, banned spearfishing, or controlled access to marine parks. In the last ten years, statutory regulations have been introduced in many technically advanced countries, controlling the standards of diving training and safety. This is particularly true of France, Britain, Scandinavia, South Africa, Australia, Germany, and USA. The legislation has often been introduced rather hurriedly, and then modified. Since legislation designed to control commercial diving in offshore oil fields concerns quite different techniques and equipment from those used by scientists, such legislation is usually inappropriate when applied to scuba diving for research purposes. In several countries, scientific representatives have succeeded in obtaining complete exemption from commercial diving legislation, or at least partial exemption.

The legal situation tends to be complex in the technically developed countries, and changes from year to year. Scientists working outside their own country should enquire as to whether there are any statutory regulations about training levels, conduct of dives, medical standards, equipment, and insurance etc. Scientific divers from many countries have been in contact with CMAS, and there is a general awareness of the problems caused by inappropriate legislation.

2.2. Examples of National Legislation

National laws applicable to diving are usually sub-sections of wider legislation. Thus, diving regulations may be enforced as part of the regulation of offshore oil production, as part of the construction industry, as part of general safety regulation of factories, or as part of universal

safety regulation. It follows that the population to whom the regulations apply will differ from case to case. In one country diving in inland waters and coastal waters may be controlled, but not outside Territorial Limits. In another country, diving will be controlled if one is working with the oil industry, but not otherwise. Yet again, diving may be controlled if one is working for a salary, but not if one is an amateur or unpaid volunteer.

Most regulations specify standards of training and experience, but not a necessary route for obtaining the standard. Only Britain, Germany and South Africa at the date of writing this Code actually require that working scientific divers attend training schools which are approved by a government agency, and every training certificate is checked by a government agency. Britain has now successfully exempted this requirement for Scientists and has reinstated sports diving standards as the recognized diving qualifications. In most countries sports diving training is accepted as sufficient for scientific diving using scuba, provided that employing institutions have an adequate supervisory program.

The following examples of legal documents applying to diving are given in alphabetical order by country. The comments are illustrative only, and should not be taken as an interpretation of the law. The original documents must be referred to.

Australia. To date there are no legislative requirements aimed specifically at scientific divers.

Australia is a federation of six states and two territories, all of which have constitutional authority to legislate on matters affecting conditions of employment, fisheries, coastal navigation and maritime matters, historic shipwrecks, parks and inland waters. Additionally, the Federal Government has responsibilities for navigation, declared historic shipwrecks, national parks, resources and fisheries.

Legislation exists in some states as to the qualifications and registration of 'working divers', which could include divers employed on scientific work. It is necessary under the various employment awards for minimum wages and conditions to apply to some categories of employed divers. This includes workers compensation cover.

Some equipment, including cylinders and valves must meet the standards of the Standards Association of Australia, Australian Standard Rules for Underwater Breathing Operations, 1976 and State legislation.

Most universities and research organizations utilizing divers have some form of Code of Practice; possibly the best known is the Code of the Great Barrier Reef Marine Park Authority. It would be difficult for a diver in Australia to hire equipment or have cylinders filled if a recognized diving qualification could not be produced. A CMAS 2-Star brevet or higher would normally be recognized but a check-out dive may be requested.

There is currently a code for basic diver qualifications, with a follow-on unit for scientific diving being drawn up by the Sub-Aqua Association of Australia (SAA). Within two years this code could be expected to be enforced by State legislation.

Austria. There are no special laws and restrictions for scientific diving in Austria. Regulations are the same as for sports divers. A scientific diver must be CMAS 2-Star or higher.

Diving is forbidden at some local archaeological sites and in private lakes. Every diver must obtain permission from the local residents or the "Bundesdenkmalamt" for archaeological sites.

Britain. The Merchant Shipping (Diving Operations) Regulations, 1975. S.I. No. 116 (applicable on British ships outside territorial waters and foreign ships within British waters)

Health and Safety at Work (Diving Operations) Regulations 1981. S.I. 399 (applicable to all divers anywhere in inland waters or at sea, on oil rigs, etc., within territorial waters or on the UK continental shelf, provided that the divers are self-employed or working as paid employees. Amateurs are excluded).

The Merchant Shipping (Diving Operations) (Amendment) Regulations 1976. S.I. 2062. (This excludes scientists and archaeologists from the Merchant Shipping (Diving Operations) Regulations 1975.

Note: The Health and Safety Regulations are the most important, and these lay down standards of training, certification, the appointment of dive supervisors, medical standards and procedures for the conduct of dives. Only doctors approved by the Employment Medical Advisory Service are entitled to give medical certificates to working divers. Exemptions are in force to permit groups of divers to be made up of both employed and amateur divers conducting scientific research, and an amateur diver of suitable experience is permitted to supervise a dive conducted by an employed diver. The minimum training standard for a working scientific diver is BSAC Advanced Diver or CMAS 3-Star. That is to say, sports diving standards are accepted and recognized as sufficient for a working scientific diver using scuba.

Canada. Canadian Standards Association, CSA Standard 2275.2 "Occupational Safety Code for Diving Operations".

Note: These standards are being gradually adopted province by province. The Canadian Association for Underwater Science is pursuing the same policy as the American Academy of Underwater Sciences, and is seeking complete exclusion for scientific diving, on the grounds that the standards are only appropriate to commercial and industrial types of diving.

Chile. Diario Official de la Republica de Chile, May 1984, no. 31.876, Titulo IV et. seq. "Del Deporte Submarino".

"Reglamento de Buceo para Buzos Profesionales", Reglamento 7-54/4, Armada de Chile, Direccion General del Territorio Maritimo y de Marina Mercante, 1982.

Note: The regulations recommend the use of the U.S. Navy decompression tables, and include depth limits on different types of equipment, medical standards, etc. Frequent reference is made to the need to consult or refer to the Maritime Authorities.

France. Ministère du Travail, Mésures particulières de protection applicables aux scaphandriers, 1977.

Centre National de la Recherche Scientifique, Inspection Générale de l'Hygiène et de la Securité: Instruction Technique sur la Securité lors des Plongées Subaquatiques, 1978.

Note: French legislation applies to employed divers. Regulations apply to three classes of diver, qualified to dive to 30m, 50m and greater than 50m. Maximum permitted depth on compressed air is 60m. The regulations specify a detailed set of decompression tables based on repeat dives and a range of surface intervals. French marine research stations have individual codes of practice and regulations to control the standards of diving within the general standards laid down by law, and by the CNRS. There is a strong move (1985) to increase cooperation and communalize standards between laboratories.

Germany. Richtlinien für den Einsatz von Forschungstauchen, Hauptverband der gewerblichen Berufsgenossenschaften, 53 Bonn 1, Langwartweg, 103 (ZH 1/540). This document describes regulations for scientific diving, and lists the following official documents: Working diving operations, VBG 39; Light diving apparatus, ZH 1/237; Construction of buoyancy equipment for divers, ZH 1/541; Saturation diving from underwater habitats, ZH 1/516. Also listed are accident prevention regulations: Compressors, VBG 4; Pressure vessels, VBG 17; Floating apparatus, VBG 40a; Gases, VBG 61; Oxygen, VBG 62.

Note: German diving regulations are very strict, with a strong requirement for on-site recompression facilities, government approved training qualifications, etc. There is a strong requirement for surface tended lifelines. There is strict segregation between amateur and working diving groups. There have been several research habitats developed in Germany using government research funds, and a great deal of experience has been obtained in the operation of these systems. There are three separate sets of laws applying to sports diving, professional industrial diving and scientific diving.

Ireland. Irish Diving at Work Act, 1984 which refers to the Irish Factories Act revised 1982. This regulates diving on a factory site which for the purposes of industrial diving is all-inclusive. Scientific diving is specifically excluded by the Irish Department of Labour from these regulations.

Note: Health and Safety legislation which may bring scientific diving under government regulation in much the same way as in Britain is currently being written but will probably be indefinitely postponed because of the cost to industry of implementation of Health and Safety legislation which will, by its nature, be more all-encompassing.

Amateur and professional scientific divers commonly work together, and joint projects involving sports divers in scientific projects controlled by full-time diving scientists have been organized both by individual universities and the Science Officer of the Irish Underwater Council. Local government funds have been used to partially defray costs of at least one major scientific project studying pollution in Dublin Bay (Clarke et al. 1986). The Irish Underwater Council considers that selected divers having suitable sports diver qualifications are covered under the general insurance policy carried for club divers while involved in organized and approved scientific diving projects.

The Shellfish Act prohibits divers taking shellfish for any purpose including scientific without a special licence form the Department of Fisheries.

Italy. No laws at present restrict the practice of scuba diving. However, insurance is a serious problem for people working whilst diving, and cover can be provided through the Centro Italiano di Richerche e Sciencia Subacquei. New legislation is under discussion. Amateur and professional cooperation is encouraged.

The Netherlands. The Netherlands does not yet have generally applicable laws or regulations on diving activities of scientific and sports divers.

General: Legal provisions covering professional diving activities have, however, been in preparation for a considerable time. These provisions will supplement the general laws on working conditions, which inter alia contain rules on safety and health. The first draft for legislation on diving also takes into account EEC guidelines in this field (Mines Safety and Health Commission). It may be assumed (late-1986) that it will be some considerable time yet before this legislation on diving will come into force. Information on this (future) legislation may be obtained from: Directoraat Generaal van de Arbeid, Postbus 69, 2270 MA Voorburg, The Netherlands (Tel. 070 694001).

Zeeland regulations: In 1980 the Province of Zeeland drew up regulations prohibiting diving as a sport in Zeeland waters without a permit issued by the provincial authorities. Persons who can prove that they dive in Zeeland for scientific or other professional purposes do not need this permit. Information on the Zeeland diving regulations can be obtained from: Provinciale Griffie Zeeland, Postbus 42, 4330 LA Middelburg, The Netherlands (Tel. 01180 31011).

Finding objects under water that have an archeological value: In principle, the Dutch Monuments Act also applies to the territory under water. This act provides that finds with a scientific or historical value have to be reported to the competent authorities (usually the local mayor or the town office). Further, the act prohibits digging for objects with a scientific or historical value without a permit. Information on searching for, or finding, historical or archeological objects underwater can be obtained from: 1. Rijkscommissie Oudheidkundig Bodemonderzoek, Kleine Haag 2, 3811 CD Amersfoort, The Netherlands (Tel. 033 12648); 2. Drs Thijs Maarleveld,

Ministerie van W.V.C., Postbus 5406, 2280 HK Rijswijk, The Netherlands (Tel. 070 949393).

Voluntary Code of Practice: The Nederlandse Onderwatersport Bond (N.O.B., Dutch Underwater Sport Association), a member of CMAS, has drawn up safety regulations that are binding on its members. The N.O.B. has addresses of members who can give information on archeological, biological and other scientific aspects of diving in the Netherlands. The address of the office of the N.O.B. is: Nassaustraat 12, 3583 XG Utrecht, The Netherlands (Tel. 030 517014).

New Zealand. Department of Labour, Safety in Construction, no. 15, Code of Practice for Underwater Diving. This is a guidance document, not a regulation. Shown here rather than in (2.4) because it is promulgated by a government agency. Actual legislation and regulations concerning diving are scattered through the Construction Act; Construction Regulations; Fisheries Regulations; Merchant Shipping Act, wreck and salvage of ships and aircraft; Mining Act; Petroleum Act; Antiquities and Historic Places Acts. The Underwater Association Code of Practice for Scientific Diving, 2nd edition, has been widely used in New Zealand.

Norway. A draft on revised regulations on inshore commercial diving is presently being circulated in Norway (1987). In its present form the regulations require underwater communications for all commercial diving and a chamber on location whenever dives are conducted to a depth below 24 meters. As a reason for the new regulations, the national labor commission lists safety as well as ensuring that commercial divers as a trade group will not be deprived of jobs as a result of sports divers accepting assignments for lower fees than their professional counterparts.

The authorities will legalize sports divers on commercial assignments by requiring that the divers hold a 'class 1' commercial diver's licence issued by the Norwegian State's school of commercial diving to perform as commercial divers.

It is still not clear whether diving instructors and scientific divers may be exempted from the new regulations. Scientific divers are, of course, no threat to the commercial labor force, but Norwegian authorities are reluctant to grant any exemptions at all. Commercial divers have stated that if they have to comply with strict regulations they will not see any other group getting preferential treatment. It is evident that this attitude is motivated primarily by the desire to form and perpetuate a monopoly. There seems to be little public interest in the scientific divers' situation. The Norwegian Sports Diving Association (Norges Dykkeforbund) is trying to protect the rights and interests of scientific divers and sports diving instructors. Semi-professionals may not be strongly affected since the regulations will be hard to enforce on the extremely long and remote Norwegian coastline.

Sweden. To date there are no legislative requirements aimed specifically at scientific divers. There are different local safety codes in practise throughout the country but they vary in important respects. This has created insurance problems for institutions.

There is an authority appointed by the government for legislation of diving certification. The authority is organized within the Swedish Navy and shall, on request, certify divers who meet the demands of identified levels of diving education in Sweden. The three levels are related to: 1. The Contracting industry, 2. The Salvage industry, and 3. Scientific diving.

Scientific diving training did not start until 1986. The training course is of a six week duration. Certification of scientists who are currently diving in the course of their work is part of an early transitional period in the training schedule. It is proposed that diving training will be adopted and incorporated into the Swedish universities' notes system.

A national safety code for scientific diving is under revision and should be presented in its new form in 1989 or 1990. A preliminary code is available from the University of Gothenburg.

Presentation of diver certification from any national or international body, especially the CMAS Scientific Diver Brevet, should give a visiting diver access to scientific diving in Sweden.

South Africa. Department of Labour, Factories Machinery and Building Work Act, 1941, Diving Work: Diver-Scientists, Chapter VII of the Regulations, Code of Practice for Research Diving. South Africa Bureau of Standards.

Note: South African regulations were negotiated fully with the cooperation of the scientific diving community. The scientific divers are represented by Barologia, the Association of Diving Scientists. The regulations make it difficult for amateur and employed groups to work together in the same team, but two self-contained teams may cooperate.

United States of America. Occupational Safety and Health Administration (OSHA), Department of Labour, Part 1910 of 29 CFR, Subpart T, Commercial Diving Operations. (See Federal Register, July 1977, v. 42, n. 141, p. 37650-37676, Final Standard.) The text of exemption covering scientific diving is contained in the Federal Register V. 47, no. 228, Friday, November 26, 1982, Rules and Regulations, p. 53357-53365. There is a later amendment of January, 1983. Those requiring more information should contact the Secretary of the A.A.U.S., 947 Newhall Street, Costa Mesa, California, 92627, USA.

Note: The American Academy of Underwater Sciences has obtained exclusion for scientific divers from the OSHA Regulations. Most major universities and marine institutes have very thorough and practical codes of diving training operated at institutional level. Divers visiting American institutes from abroad will usually have to satisfy training, legal and medical standards, established by the institution where they are going to work. To operate under the exemption OSHA requires that 'Scientific diving be under the direction and control of a Diving Program utilizing a Diving Safety Manual and a Diving Control Board meeting certain specified criteria'

2.3. Discussion

Scientific diving has an extremely good safety record, and there is no evidence that accidents or fatalities were frequent before legislation was introduced in any country, or that accidents have increased or decreased after legislation was introduced. (See Flemming, 1981, for analysis of diving accidents in Europe and Schenk & McAniff (1975) and Sharkey & McAniff (1982) for accidents in the U.S.A.). It follows that legislation should serve the purpose of guaranteeing the *status quo*, rather than effecting major changes in practice. Where legislation exceeds this level of restriction, the monetary cost of scientific diving increases, work is delayed and safety may even decrease as divers perceive that the regulations are generally irrelevant and unenforceable. For a comparative discussion of national legislation see Flemming (1985).

2.4. Examples of Codes of Practice

In several countries there are important documents providing guidance on diving practice at a level of recommendation, rather then mandatory legislation. These documents are usually designed in a very positive way, providing interpretation of legal matters, and advice on diving in sea and freshwater conditions found in that country.

Britain. The Code of Practice for Scientific Diving, edited by the Underwater Association for Scientific Research, published by the Natural Environment Research Council. Third edition, 1979. (Fourth edition in preparation).

Canada. Canadian Association for Underwater Science, Standard of Practice for Scientific Diving. Draft, February 1984.

Italy. CNR (1980) Normative di Sicurezza per l'Immersione Scientifica. (DeStrobel and Colantoni (1984) SACLANTCEN Code of Practice for Scientific Diving.

South Africa. South African Code of practice for Scientific Diving, published by Barologia, Department of Oceanography, University of Capetown, Rondebosch 7700 (adapted from 2nd ed. of the Underwater Association Code of Practice, by permission).

U.S.A. American Academy of Underwater Sciences, Standards for Scientific Diving Certification and Operation of Scientific Diving programs, 1984.

Woods Hole Oceanographic Institution, Diving Safety Manual, 1983.

NOAA Diving Manual. 1979. J.W. Miller (ed). US Government Printing Office.

Minimal Standards for Scuba Diving Certification and Operation of Scuba Diving Programs, 1981. California State Universities and Colleges.

Narragansett Bay Campus Research Diver's Manual. 1985. University of Rhode Island.

Note: These documents are just a few of those prepared by major universities and research institutes. Many sections of these institutional documents are deliberately phrased to be as similar as possible, and to comply with the minimum standards of practice for scientific diving as set out by the A.A.U.S.

2.5. Insurance

Divers carrying out scientific work underwater should be insured.

2.5.1. Introduction

Insurance legislation differs widely from country to country, and between government organizations and private organizations. Employed divers may be covered automatically by virtue of their employment, in some cases.

Institutes, university departments or groups of divers who are, or wish to be insured commercially, should arrange consultation between their insurers, the administrators and the scientists responsible for diving activities to ensure that adequate insurance cover is provided.

The following points are relevant to such consultation:

1. Size and training standard of the diving team.

2. Medical examination standard.

3. Code of practice or regulations followed.

4. Operating areas and depths.

5. Apparatus and techniques involved.

6. Equipment maintenance standards.

7. Liaison with marine insurers if research vessels involved.

8. Compliance with statutory regulations where necessary.

It is the institute's responsibility to take all reasonable precautions against accidents during diving activities. This demands standards of medical fitness and training, adherence to an approved Code of Practice and the provision and maintenance of suitable equipment.

In all institutes diving is a voluntary activity and in some institutes divers are required to sign a disclaimer to that effect. This serves firstly to draw the individual's attention to the demanding nature of the duty undertaken and secondly to indicate that the diver knowingly waives some rights. The individual can only press a claim against the institute by

proving negligence on its part. The diver is entitled to refuse to dive under any circumstances in which there is reason to believe that there is evidence of negligence, for example the provision of defective equipment.

Since the individual has little chance of a successful claim against the institute in the event of an accident occurring if all reasonable precautions have been taken, the diver is strongly advised to take out personal accident insurance. This and all other policies such as life insurance and mortgage protection policies should have specific endorsements for diving risks in connection with employment, whether paid or unpaid, added to the policy document. Under certain circumstances it may be possible for the employing institution to reimburse divers for the excess premium required to obtain or maintain the usual life insurance policies on a personal basis.

Scientific diving associations such as AAUS, CAUS, UASR, CIRSS, etc. provide advice on insurance for divers.

2.5.2. Classes of risk

Several different classes of risk and liability should be considered, not necessarily in order of importance.

1. Liability of the employer for claims against the employer by an injured diver or their dependent(s).

2. The liability of the employer for claims against the diver by employees or the general public arising from diving accidents.

3. The liability of any diver for claims against the diver by other divers or members of the public arising from diving accidents.

4. Personal accident insurance for individual divers compensating them or their dependents for accident or loss of life caused by diving while employed.

5. Personal accident and third party liabilities arising from boat-handling, which is not usually included in a diving insurance arrangement.

2.5.3. Standard group insurance policies

Sports diving organizations and national diving federations often provide third party public liability insurance for their members as part of the membership rights, the cost being part of the subscription fee. Personal accident insurance can usually be obtained through agents who are familiar with diving risks. In both cases, these policies become invalid if the diver undertakes paid or professional work for profit.

For this reason, some scientific diving associations have negotiated group insurance to cover scientific work only. Examples are the CIRSS in Italy and the Underwater Association for Scientific Research (UASR) in

Britain. In both cases, a member of the association receives insurance cover whilst employed in scientific diving activities. For addresses of scientific diving associations, see Appendix 8.

2.6. Equivalent job titles

Detailed descriptions of responsibilities or personnel will be given in Section 3 but a broad equivalence of titles is important for legal purposes and insurance evaluation and is thus relevant here. The titles of people responsible at different levels vary from country to country but the overall structure is consistent. The titles and structure listed below will only apply in larger institutes or departments, and in smaller establishments some of the roles can be combined. The job titles illustrated below have been chosen from the line-management structures in several countries, and are shown as examples (Table 2.1).

In general terms Level 1 is the ultimate legal and employing authority in the organization. Level 2 is the senior individual, individuals, or committee responsible for overseeing diving training and safety. Level 3 is the responsible administrative officer charged with carrying out the policies and directives of the Diving Control Board. Level 4 is the professional technical expert responsible for all technical, administrative and personnel aspects of diving training and safety. Level 5 is the person responsible for diving safety and conduct at any particular dive site. Level 6 describes the diver who is in charge underwater when a buddy pair dive together. Level 7 describes the diver at work. Level 8 is a diver whose training has been approved, but is not yet complete.

2.7. Qualification records and Authorization to dive

Certification of the diver's training courses, medical examinations and diving records should be in an officially recognized diver's record card or log book. In a few countries these log books must contain records of every dive with specified details required by law. In most countries, a sports diver style of log book is sufficient.

With regard to training records the following items should be recorded and signed or approved with the appropriate stamps and dates:

1. Senior officer's approval to undertake diving course.
2. Signature of a voluntary declaration form
3. Medical examination and X-rays passed prior to first dive
4. Theoretical written examination passed.
5. Pool examination passed, or shallow water tests.
6. Open water basic training with scuba completed.

7. Open water practice period as a Trainee diver completed.

8. Authorization to dive.

In some countries or institutions diving authorizations are depth limited at intervals, and may expire if dives are not completed by regular dates. These systems are effective where it is a simple matter for divers to obtain dives in deep water in order to keep in date, but may result in unnecessary journeys and expense when an institute is located far from deep water. In the latter case a work-up dive schedule is preferable before each major diving project (4.9.1; 4.9.2; Table 4-1).

2.8. Pay

Some institutions or organizations provide a pay bonus or supplement for scientists who dive in the course of their work. This practice does not compromise the general principle that scientific divers are employed primarily as scientists, and that diving is only a voluntary element in their research programmes. In some countries the acceptance of diving pay may change the legal status of the diver.

Supplementary pay schemes are usually based on either:

1. A proportion of the scientist's daily pay added to each day on which diving takes place.

2. A sum proportional to the number of atmospheres X minutes for which the diver is either actually underwater, or fully kitted up on the surface before and after a dive.

3. A fixed sum which is intended to compensate the diver for discomfort or outdoor time or additional personal costs incurred.

2.9. Volunteers

Employed/working scientific divers may frequently dive in company with volunteer assistance or teams in the following circumstances;

1. Where an employed teacher or supervisor dives with students in the course of scientific tuition or research.

2. Where students or amateurs volunteer to join a selected team to conduct research and assist a professional research worker.

In these cases the amateurs/volunteers should be regarded as if they were temporary employees, and their diving should be conducted according to the same Code of Practice and laws as those applying to the institute/university/employer. The only exception may be the legal requirement to have attended specific courses of training relevant only to employed divers. This protects the institution from the allegation that it

is allowing amateurs to dive in an unsafe manner whilst utilizing their labour and goodwill.

3. Where a professional researcher or scientist supervises members of a club or voluntary group who have offered to do environmental studies in the region where they normally dive, and ask for scientific advice.

4. Where amateur divers discover an archaeological site, and are supervised by a visiting professional.

In these cases diving will almost certainly be conducted to the normal standards of sports diving, and be covered by sports diving insurance. Neither the visiting professional, nor their employing institution takes responsibility for the diving training standards, conduct of dives, choice of dive sites or times of dives. The visiting professional scientist should make sure that their own diving practices are compatible with those of the amateurs, and that their insurance is not invalidated by diving without professional companions.

It cannot be stressed too strongly that the above examples are only examples from a range of possibilities, and that the law has never been tested in this area. Cooperation between amateur and professional scientific divers has proved of very great benefit to aquatic science over the last two decades, and is very widely practised. It is to be hoped that this cooperation will continue.

Volunteer amateur divers working for an institution, whether paid or not, should sign a declaration form outlining the terms agreed upon, and making it clear what standard of diving and Code of Practice is being applied.

Diving conducted in the mode of paragraphs (3) and (4) above should not be regarded formally as scientific dives, or logged as scientific dives, except for the professional scientists involved. This helps to preserve the statistical records of scientific diving; to avoid over-counting the numbers of supposed scientific dives; and to identify the true categorization of any accidents or incidents that may occur.

Table 2.1. Examples of equivalent job titles.

Level	UK	USA	CANADA	NORWAY
1.	Director of Institute, or Chancellor of University.	President of the University.	Chief Executive.	Governing Board, or Rector of the University.
2.	Diving Officer.	Diving Board of Control.	Diving Control Board.	Diving Control Board.
3.	----------	Diving Officer.	Diving Officer.	Departmental Diving Officer.
4.	Chief Diver.	----------	---------	Diving Officer's Appointee.
5.	Dive Marshall/Dive Supervisor.	Lead Diver/ Dive Master/ Supervisor.	Person in Charge.	Lead Diver.
6.	Dive Leader.	Dive Leader.	Dive Leader.	Dive Leader.
7.	Diver.	Diver.	Diver.	Diver.
8.	Trainee	Diver-in-training.	Diver-in-training.	Trainee.

SECTION 3. ORGANIZATION

3.1. Chain of command and responsibilities

The chain of command suggested here is appropriate to fairly large organizations. In the case of small groups many of the responsibilities will be combined in one person, or, in the absence of superior authority, assumed communally by the members of the group. Even where no long chain of command exists, divers still must have clear-cut responsibilities for their own and each other's safety. The outline chain of command elaborated upon here demonstrates the nature of the level of responsibility in the chain of command and is not intended to be a formal system, with every post filled by a different person, except in the larger institutes (See Table 2.1).

3.1.1. Corporate Responsibility [Level 1]

Diving groups are operated by authority of the President, Director or Head of Department of a research establishment, university or polytechnic.

The President, Director or Head of Department is responsible for appointing in writing a suitable Diving Control Board or an Institute Diving Officer and for ensuring that adequate finance and material support is made available to train and operate the diving group safely. If diving legislation of a health and safety nature is enacted by government to regulate diving at work, the President, Director or Head of Department is responsible for ensuring that the provisions of acts are adhered to. In small groups, one person should take responsibility for ensuring that regulations are known and complied with.

3.1.2. Diving Control Board [Level 2]

An institute or university, or other corporate body may or may not have a Diving Control Board to set standards and work practices for the particular nature of the work and the local diving conditions. A Diving Control Board is most relevant in the case of a university or large institute where numerous component faculties or departments have differing interests, and need to be represented. This group sits to formulate procedures and considers the best way to get the work done taking into account safety and operational conditions. This system of management is most commonly used in the USA and Canada.

In a university or institute where a great deal of diving is going on, the Diving Control Board should be as broadly based as possible so that the needs of all research diving groups are taken into consideration. The organization of the Diving Control Board can take whatever form best suits the size and experience of the research groups. In the case of an institute which is beginning diving operations or for some other reason has little or no in-house expertise in scientific diving, the President, Director or Head of Department can appoint an external member of this Board, which can consist of the external member alone.

3.1.3. (a) Diving Officer [Level 2]

Where an Institute or University does not appoint a Diving Control Board, the Director or representative of the corporate administration shall appoint a senior scientist as Institute/University Diving Officer. This person shall be the corporate officer responsible for the organization and policies of the diving program.

This officer should coordinate the scientific program of the group, and ensure that the divers are properly trained, equipped and led, and that the necessary administration is dealt with.

This officer should have a good working knowledge of diving, but need not necessarily be in-date with personal training.

This officer should appoint a Chief Diver and defer to the views of the latter on all matters concerning diving safety.

The Diving Officer may hold the post of Chief Diver, if he or she has the necessary qualifications and experience.

It is the responsibility of the Diving Officer to ensure that there is never any doubt about the chain of command.

It is the responsibility of the Diving Officer to take the initiative to produce with the Chief Diver and the Scientific Project Leader a joint operational instruction relating to each project. This will detail scientific objectives, operational procedures and safety precautions.

The post of Institute Diving Officer is not identical with the post of Diving Supervisor who is often the specified person in charge of diving operations in some commercial diving regulations. In a research context the senior person responsible for overall conduct of diving operations should have a general knowledge of the scientific programmes and requirements, and also have sufficient seniority to appoint and report upon personnel. The Chief Diver may have insufficient seniority from this point of view. The Institute Diving Officer, thus has the responsibility to comply with relevant government diving regulations in organizing diving operations, and the President, Head of Department or Director is responsible for the institute or university to ensure that this happens.

3.1.3. (b) Diving Officer [Level 3]

Where an Institute or University has created a Diving Control Board, the Board shall advise the President, Director, or Head of Department on the appointment of the Diving Officer. The Diving Officer has the responsibility to carry out the policies of the Diving Control Board, and is a member of the Diving Control Board. The Diving Officer must have several years of research or scientific diving experience, and should be an in-date diver, with a thorough knowledge of diving theory, safety practices, and operational procedures. This pattern of management is most common in the USA and Canada.

3.1.4. Chief Diver/Diving Officer's Appointee [Level 4]

Institutes or Universities that do not appoint a Diving Control Board, and do appoint a Diving officer with scientific seniority, should also appoint a Chief Diver. The Chief Diver should be appointed by, and report to, the Diving Officer. The Diving Officer is responsible for chosing for this post a diver who can be trusted to act as the nucleus for a safe diving team. This system of management is used in British and some European Institutes. The responsibilities of the Chief Diver overlap considerably with those of the Diving Officer in establishments with a Diving Board of Control, and in subsequent sections of this Code the term Diving Officer/Chief Diver will frequently be used to describe personnel with these responsibilities.

For this post, a minimum formal qualification should be at least at the level of CMAS 3-Star or NAUI Level IV (Advanced Diver), with a minimum of 50 scientific dives. In a large institute the Diving Officer should ensure that the diver appointed has in addition the personal qualities and experience normally appropriate to a CMAS 4-Star diver and a wide experience of working underwater.

The Chief Diver has full responsibility for all matters connected with diving safety, including training and equipment. It is ultimately at the discretion of the Chief Diver that an individual engages in diving for an Institute. The Chief Diver is broadly equivalent to the Diving Supervisor positions referred to in some commercial diving legislation. In a large institution several teams of divers may be operating at different locations and the Chief Diver will delegate responsibility for diving safety in each group to a designated individual.

All members of a research establishment including the Diving Officer are expected to defer to the views of the Chief Diver on safety provisions.

3.1.5. Chief Scientist/Project Leader/Principal Investigator

In all scientific diving there shall be a person responsible for the scientific objectives, and line management aspects of the project. This person is usually known as the Chief Scientist, Project Leader, or Principal Investigator. For projects requiring diving support the Chief Scientist is often not a diver, and should consult the Diving Officer at the earliest possible stage in project planning.

The Chief Scientist will defer to the views of the Chief Diver, Dive Marshal or Dive Leader on matters connected with safety. This must be regarded as a condition for the undertaking of any diving project.

3.1.6. Dive Marshal/Dive Supervisor/Dive Master/Person in Charge [Level 5]

A Dive Marshal or Supervisor will be appointed from amongst the divers by the Chief Diver, if he/she does not himself undertake the duty.

During the preparation and carrying out of any particular diving project for which he has been appointed, the Dive Marshal has the responsibilities of the Diving Supervisor, as defined in some commercial diving regulations.

Minimum qualification is at the equivalent level of CMAS 3-Star (NAUI Level IV, Advanced Diver) with some scientific diving experience, but the Chief Diver must additionally be satisfied that the diver appointed understands the work task and can carry out the duties safely and efficiently.

The Dive Marshal has full operational responsibility for a diving expedition working under the scientific direction of the Chief Scientist. It shall be the responsibility of the Dive Marshal to ensure that the conditions and practices laid down by this Code are complied with on site.

It may happen that the Chief Scientist, if he/she has the appropriate diving experience, could be appointed as the Dive Marshal for a particular operation. However, in some establishments this is regarded in general as an undesirable practice, since it is considered that the Chief Scientist's understandable wish to finish a task may overrule better judgement on safety. It is therefore recommended that the Dive Marshal and Chief Scientist should usually not be the same person.

3.1.7. Dive Leader [Level 6]

A Dive Leader will be appointed from amongst the divers by the Dive Marshal. The Dive Marshal may undertake the task of Dive Leader.

The Dive Leader has operational responsibility for a dive, and works under the orders of the Dive Marshal/Supervisor, and under the scientific direction of the Chief Scientist.

3.1.8. Diver [Level 7]

Divers are expected to work under the instructions of the Dive Leader, but if they are not satisfied with any aspect of the project they should not be ordered to continue. Every diver has the responsibility to ensure that all personal logbooks are kept up to date, and the terms of any regulations complied with.

Ultimate responsibility for safety rests with the individual scientific diver. It is the diver's responsibility and privilege to refuse to dive if, in his or her judgment, conditions are unfavorable or unsafe, or if he or she would violate the dictates of their training or the provisions of this Code. No scientific diver shall ever be coerced to dive, or be penalized for not diving. It is the responsibility of the diver to terminate the dive, without fear of penalty, whenever he or she feels that it is unsafe or unwise to continue, unless it compromises the safety of another diver. No research dive team member may be permitted to dive for the duration of any known

condition that may be likely to adversely affect their own safety and health or that of any other team member. Each scientific diver shall conduct a functional check of their diving equipment in the presence of the diving buddy or tender.

3.1.9. Trainee/Diver in Training [Level 8]

A scientific diver may be defined as a trainee, or have trainee status, in three different circumstances:

1. During initial instruction the diver does not yet have a sufficient number of dives, and has not completed the necessary lectures, tests, and examinations. This is a diver-in-training.

2. After completion of the required training course, a scientific diver may still need to obtain experience of scientific methods, experimental techniques, or methodology, by gaining working experience accompanied by a more qualified scientific diver.

3. When new experimental methods are to be used in extreme or unusual environmental conditions, a scientific diver may have to adopt trainee status in order to gain experience working alongside personnel who already have experience of the conditions.

3.1.10. Temporary Diver (See also 2.9)

A Temporary Diving Permit at an Institution may be issued to a visiting diver from another Institution, or from abroad, or to unpaid volunteers participating in diving for only a few days. Temporary staff must have appropriate diving qualification, either of a sports, scientific, or commercial nature. The Chief Diver/Diving Officer will generally require Temporary Divers to undergo one or more supervised familiarization dives. Portions of the institute diving requirements may be waived at the discretion of the Chief Diver/Diving Officer. Waiver and indemnity forms may be required (Appendix 9).

3.1.11. Ship's Master

The Master of a research or other vessel which is acting as a mother ship from which diving is taking place shall be consulted adequately in the planning stage of a dive. This is particularly important when divers from one country are diving on a vessel supplied by another country because of the difficulties of language and differences in practices.

The Master's word is final with regard to all actions on or near the vessel. This applies to launch and recovery of boats, and whether diving can take place. In particular, the Master may consider that diving is not

permitted if the requirement to stand by or manoeuvre the vessel for rescue purposes would endanger the vessel itself.

The Master is responsible for displaying signals and lights from the vessel indicating that diving is taking place.

3.2. Delegation of duties

Duties that have been allocated to an individual may be delegated with specific authority to allow the delegate to carry out the task, but responsibility remains with the delegator. If the need to transfer RESPONSIBILITY does arise, for example when the Diving Officer or Chief Diver is on vacation or on sabbatical, the appointment of a replacement officer must be approved by the appropriate higher authority.

On the dive site, where the Person-in-Charge or Lead Diver wishes to dive, the duties for on-site supervision can be delegated to another individual with suitable qualifications by procedures that are standardized within the institution diving program.

3.3. Diving with other groups (See also 1.3).

Where divers from two or more Institutions are planning to dive together in a joint project, it is usually best for the Diving Officers to agree on using one of the existing manuals or codes of practice, which shall apply to all the divers. This is the simplest procedure, provided that the methods of diving are reasonable similar, and the divers are given time to read the necessary documents, and adapt to their requirements.

If it is not possible, or necessary, to agree on one of the existing safety manuals, the Diving Officers or Chief Divers should ascertain which of their procedures are the same, similar or in need of modification to allow the two (or more) diving groups to work together. A standard operating code for the conduct of the work must be agreed and clearly communicated to all the divers and boat personnel involved. It may not be necessary for the personnel of the two groups to actually dive together as the work can go on in parallel or alternating dives, but it is important that each group know of the procedures of the other group and that these procedures be brought to a common system, if possible, while the groups are in logistical or project contact. At the very least, divers from either group must be able to carry out emergency rescues on members of the other group without incompatability of equipment or technique.

SECTION 4 TRAINING AND MEDICAL EXAMINATIONS

4.1. Introduction

This section deals with the factors requiring attention in the preparation of personnel for diving. These include medical certification, personnel selection, fitness, gender factors, theoretical and practical training log books and qualification records. Training varies from country to country, and even though some of the recommendations here might exceed the present standards used locally, it is recommended that this section should be adopted as the minimum standard.

4.2. Medical certificates

In most countries, no statutory obligation is placed on establishments to require specific medical examinations for scientific divers. In some countries self-regulation based on the peer system obligates establishments to a common standard. In other countries legislation has been passed that sets the frequency and type of diving medicals, as well as the duration of validity of medical certificates. Generally, legislation has taken the form of commercial diving regulations, which are inappropriate for scientific diving.

There is a considerable range in working conditions and fitness requirements for scientific divers. For example, the medical standard required of a student collecting snails at 10 meters is obviously not the same as that required for a researcher working at 200 meters in saturation for 3 weeks. The vast majority of scientific dives are done to a depth of 20 meters or less using scuba and entail light work such as collecting and sampling. Scientific diving activity is often seasonal and sporadic. There is no rationale for subjecting shallow water divers to as rigorous a medical evaluation as deep water and extreme exposure divers. In response to these variables, two medical standards have been established in this Code allowing for different circumstances and frequency of diving. A number of authoritative medical check-sheets for scientific diving have already been produced which meet the guidelines for this Code and a recommended check-sheet has been developed using these examples (Appendix 9).

4.2.1. Minimum requirements for medical certificates

In many countries divers, whether in the employment of institutions or working as students or volunteers, must have a medical examination at least at the commencement of employment, and annually thereafter. This must be at least of a level equivalent to that set out in the Class II medical certificate (4.2.3. & Appendix 9). It is strongly recommended that this should be adopted as the basic medical requirement by all establishments working to this Code of Practice.

4.2.2. Levels of Medical Certification

(a) Class II. This is the general medical certificate recommended for scientific diving under this Code of Practice. It should be used to medically certify divers for all diving except that associated with the Class I certificate. The period of validity of the Class II medical certificate is 12 calendar months.

(b) Class I. This is a specialized medical certificate recommended for use in evaluating medical fitness for saturation or exceptional exposure decompression diving. The Class I certificate may be used in place of a Class II certificate to medically certify a diver, however, because of the added hazards of the radiological tests involved in having to otherwise take two closely spaced radiological examinations, which is strongly discouraged as a general practice. The period of validity of the Class I medical certificate is 6 calendar months. At the end of this period, the Class I reverts to a Class II certificate for 6 calendar months.

4.2.3. Other Certificates

There are a number of different commercial, military, and sport diving medical standards used nationally and internationally. When a new scientific diver joins an organization holding such a medical certificate, the standard should be consulted to determine if it correlates as equivalent to the Class I or Class II medical standard recommended by this Code. It is recommended that equivalent medical certificates should be recognized, and repeat medical examinations be avoided.

4.2.4. Decompression training and medical records.

Divers must be thoroughly instructed in the dangers of decompression sickness, the use of no-decompression limits and, when relevant, the conduct of decompression dives. (4.11,11). Recent research in decompression theory suggests that the tissue models used in computing existing air diving tables are not accurate. One implication of this research is that divers should be conservative when using the tables. A second is that information ought to be collected on the incidence of decompression sickness and asceptic bone necrosis amongst divers operating with these tables, or with decompression computers, in order to validate empirically the tables and document the risks their use entails.

It is strongly recommended that similar programmes be set up for divers operating with other major tables in use (French tables, United States Navy tables, Defence and Civil Institute of Environmental Medicine tables, etc.), and that examining physicians be made aware of this service.

Medical Officers employed by an establishment to conduct the medical evaluation of divers and to treat divers' injuries should be appraised of the nature and treatment of decompression sickness and bone necrosis. Incidents of decompression sickness should be fully documented with medical records and dive record sheets (4.7). Post-treatment, the long term effects of incidents should be monitored, including any possible onset of asceptic bone necrosis.

4.2.5. Gender Factors in Diving

Women and men have some differing physiological parameters in diving and their medical certification requires slightly different emphasis. For example, a woman's subcutaneous fat deposits may tend to increase the risk of hyperthermia as well as of decompression sickness, and diving during menstruation somewhat elevates susceptibility to decompression sickness, as may the use of birth control pills. Conversely, it has been suggested (Edmonds et al. 1981) that women are liable to hypothermia because of their lower body weight. These two conflicting hypotheses illustrate the lack of clear evidence in this matter and the doubtful basis for mandatory regulatory distinctions based upon gender.

Men with low subcutaneous fat levels are more susceptible to hypothermia, and facial hair can interfere with the seal of a facemask. Strength of both men and women should be evaluated on a task-specific basis and should be adequate for foreseen circumstances. Endurance varies significantly amongst both individual men and women and can be markedly influenced by fitness, training and skill. Culturally, there is evidence to suggest that men are more likely to be cavalier about diving safety, and more apt to abuse alcohol or dive when fatigued or not up to standard physically, although here again there is marked variance amongst individuals.

Medical check-lists incorporate the more significant of these variables. It is advisable that the Medical Officer employed by the establishment to conduct the medical evaluation of divers should know of these differences and be able to advise divers in these matters. Additionally, the Chief Diver/Diving Officer should similarly know and be able to evaluate the fitness of individuals for diving activity.

4.2.6. Pregnancy and Diving

Some countries may ban employed women divers from diving during pregnancy, whilst others make no such restrictions. Where there is legislation in these matters, it should be given priority. Where no such legislation exists, the following guidelines are applicable, and have been prepared by a group of women scientific divers.

Normal standards of health and fitness required for diving must be upheld. Consequently, certain temporary medical problems, e.g. elevated blood pressure, toxaemia, severe nausea and sickness, varicose veins, vertigo, etc. arising during pregnancy, or as a result of menstrual or hormonal disturbance, however caused, should be regarded as probable contra-

indications to diving depending on their severity. Symptoms must be assessed individually by a competent medical officer. Certification of fitness for diving should therefore normally be obtained if such problems arise and persist; particularly if medication is being taken.

There is some evidence that women are naturally slightly more susceptible to decompression problems (Edmonds, et al. 1981). It may be prudent therefore, in planning decompression schedules to allow a wider margin of safety than usual in interpreting maximum depth and times required in no-stop and stage decompression diving.

Particular attention should be focused on potential hazards associated with diving during pregnancy, in addition to other health problems identified. Any abnormality of pregnancy, e.g. *Placenta praevia*, blood loss, threatened miscarriage, etc. should be regarded as a disqualifier for diving.

Diving may possibly incur hazards both for the unborn child and for a pregnant woman herself, even when there is no existing health problem (Bolton, 1980; Edmonds et al., 1981; Rankin, et al., 1980). The evidence is not statistically clear either for or against this proposition and the woman diver must be encouraged to make her own decision within the limits of existing legislation or rules. Women divers should keep a careful check on their menstrual cycle so that pregnancy, if suspected, can be confirmed as early as possible. This is in their own and in their colleagues' interests. The most critical time for the foetus is possibly during the first trimester, when foetal development could be placed at risk (Bolton, 1980). For this reason, women planning conception may be wise to restrict diving in order to cover the period when pregnancy cannot be detected.

In late pregnancy (third trimester), mental alertness is often deleteriously affected so that responsibilities and decision-making, especially in emergencies, could be seriously diminished.

A woman's physical shape and condition in the third trimester are such that they render her more easily fatigued and less agile. These factors are likely to affect her safety and stamina in diving, particularly in carrying heavy gear which she should not be doing at this time. In practice, individuals may vary from feeling quite fit throughout pregnancy to being totally incapacitated even for the mildest levels of physical work, especially in the third trimester.

Under normal circumstances therefore, a woman should not undertake diving duties during the third trimester as her condition may affect the safety of both herself and her colleagues.

In conclusion, if pregnancy is suspected or confirmed, diving should be restricted:

1. First trimester:-Maximum depth of 20 meters, and a duration of half the no-stop time (limit of no decompression stop diving) of the decompression tables (see Section 11).

2. Second trimester:-Maximum depth of 20 meters, and a maximum duration 5 minutes less than the no-stop time.

3. Third trimester:-no diving

4.2.7. Confidentiality of medical reports

The detailed medical report of a doctor examining a diver should be treated as confidential and the doctor should report to the employer whether the diver is or is not fit for diving. However, it is in the interests of safety that the Chief Diver/Diving Officer be informed that a diver is suffering from a particular condition, before the diver takes part in diving operations, if the medical officer considers that this might in any way limit the type of diving operations for which the diver is fit.

4.3. Fitness

In establishments where personnel dive regularly, the diving itself will keep them physically fit and special attention need only be paid to colds or other passing ailments. Where personnel dive only from time to time there will be a problem of maintaining adequate physical fitness. Although fitness may not apparently be needed to perform planned tasks, an emergency can produce a situation where fitness, quick reflexes and strength may make the difference between safety or a serious accident. In preparation for diving operations the senior diver in charge should consider the fitness of personnel involved, taking into account the recent diving operations or sporting activities which may have helped to maintain fitness. If personnel are obviously unfit they should be given a series of swimming and snorkeling exercises in the weeks preceding field work. Regular aquatic exercise contributes to diving safety. Divers should be able to complete an 800 meter snorkel swim with fins in 16 minutes.

4.4. Swimming Pool and Sea Training Schedules

Recent surveys of establishments where scientific diving is carried out have shown that the diving techniques used are almost exclusively those of scuba. The minimum training standard accepted by Diving Officers is generally that of a mid-level sport diving certification such as the NAUI Level IV, BSAC Advanced Diver and CMAS 3-star. However, it is recognized that a newly trained diver usually requires 10-30 working dives after completing certification before they can be considered fully trained for scientific work. Training schedules are established in Codes published by the AAUS and CAUS.

Additionally, in some countries (Canada and the United States) divers are allowed to enter diving programmes at a lower level of certification (NAUI Level II) as "divers-in-training", and gain experience through on-the-job training for eventual certification as scientific divers (2.9). This method allows divers to be fully trained for task-specific skills in fewer dives and consequently to be certified in fewer dives.

Initial instruction of divers may be accomplished within the establishment, or by sending them to a recognized club, dive store, or diving school.

In the training of scientific divers it is important that the discipline of thinking and working while diving should be introduced early on. This should be done in parallel with the tests of ability to swim, cope with diving equipment, and maintain safety, which are typical of sports diving training. This work training should be of an introductory or familiarization nature, and not so arduous that it interferes with learning to dive. Work familiarization should concentrate primarily on the following range of tasks:

1. Navigation, search and recovery, underwater rope-work, dive site selection, scientific dive planning and team-work.

A secondary range of work familiarization could include:

2. sample collecting methods, data gathering techniques, common biota behavior, installation of scientific apparatus, site location and relocation, small boat operations and knowledge of government and legal requirements when diving at work.

Dive training should be conducted both in the pool or sheltered waters and in open water. The intensity of training may be increased by simulating adverse conditions in protected water, such as low light or reduced visibility, or by training under actual open water conditions but in a highly supervised and controlled setting.

Before any open water operations involving new equipment or untried methods or techniques, the personnel involved should train with the equipment in a pool or under sheltered conditions. Similarly, proposed work in extreme conditions such as under ice, rough seas or fast currents (Section 8.2) should be preceded by appropriate training and practice in such conditions.

There should be thorough training in the use of adjustable buoyancy systems where they are being used.

4.5. Theoretical Knowledge

Standards of theoretical knowledge must be at least to sport diving certification levels for scuba training (NAUI Level IV, CMAS 3-Star), preferably supplemented by additional reading. Theoretical knowledge related to equipment maintenance, navigation, first-aid and other specialized activities should be dealt with by instruction, reading and demonstrations. A written examination should be held as part of the training. Examinations designed to suit these specific requirements have been developed by a number of institutions, and should be circulated internationally to the respective national scientific diving organizations and other interested bodies so that the levels may be compared, with a view to future standardization.

4.6. Qualification Standards and Working Depths

The following standards relating experience to operational diving are strongly recommended:

(a) No diver should be employed on a working dive, even as a trainee, until they have obtained a "diver-in-training" certificate or equivalent. The first ten working dives should not be deeper than 20 meters.

(b) A "diver-in-training" should not dive except when accompanied by a specifically authorized scientific diver.

4.7. Dive Record Sheets

Detailed dive records maintained by the Diving Officer provide the following: 1. Administrative records of time spent in training and work, for the purpose of assessing efficiency of effort, personnel and expenditure. 2. Record of training and experience of personnel. 3. Evidence in the case of an accident. 4. Basis for certification of training. 5. Evidence of safe diving for insurance purposes. 6. Medical evidence for collection of data on decompression tables.

Specimen dive record sheets are shown in Appendix 12.

4.8. Log Books

Individual divers should keep a log book as evidence of their experience and training and for reference in the case of accidents. The minimum record should consist of: dive site, date, maximum depth reached by the diver, name of diver, name of diving companion, name of dive supervisor, decompression schedule used, repeat tables used if any, outline of work, and sufficient data on start and surfacing times, and time of leaving the bottom, such that the dive profile can be checked against the decompression procedures carried out. In addition, the true clock time of surfacing MUST be recorded so that surface intervals can be calculated before making the next dive.

It is highly recommended that the Diver's log book also contains a photograph, medical endorsements annually, and certificates of training. A number of standard logbooks are available and some styles are included in this Code (Appendix 12).

To avoid loss of information, it is recommended as a general practice where divers are operating in inclement conditions, that dive records be kept on site in a "wet-log" preferably made of waterproof paper, and daily transferred to the permanent log.

4.9. In-Date Qualifications and Work-Up Dives

Scientists often do not dive regularly, and a check must be maintained on their readiness for working diving. The following two systems have been used successfully, and may be combined as suggested below.

4.9.1. In-date readiness system.

This system assumes that a diver who has dived within a set period is fit and ready for working diving. The practice is liable to abuse, and personnel may carry out token dives which do not really maintain training. It seems preferable to set a time limit of one month within which personnel retain readiness for working diving, and to state that the qualifying dive must itself be a working dive, or a practice dive to at least 20 meters for 20 minutes with a simulated work task. Except in coastal institutes, most divers will probably lapse from in-date readiness, and work-up dives will be necessary before projects.

4.9.2. Work-up dives.

If a diver lapses from in-date readiness it does not affect the diver's basic qualification. The sequence of work-up dives required to give working preparedness depends on the depth of work and the time lapse since the last dive. An outline of a recommended schedule is given in Table 4-1. Dives should be considered purely as training, but may involve light work which can

be easily abandoned in the interests of safety. Dives should be at least 20 minutes in duration, unless excessive decompression time would be incurred. If an individual fails in the task or seems unhappy during work-up dives, the Chief Diver/Diving Officer should extend the work-up period or drop the diver from the team. The briefer work-up schedules may be included in the first day or so of the project if the divers are generally fit, but the longer schedules should be started well in advance of work to allow for snags and to regain fitness. Work-up dives appear to increase decompression safety by lessening the risk of bends.

The importance of the "in-date" concept and the necessity for work-up dives cannot be stressed too strongly. They are key factors contributing to the overall safety of diving operations carried out by an establishment, and Directors, Heads of Departments , and Chief Scientists, should always be aware of the need for diving personnel to maintain their state of readiness and allow sufficient time and funds for them to do so.

Table 4-1. Recommended schedule of work-up dives for various working depths after a break from active diving.

Time Lapse	Working Depth		
	10m	10-30m	over 30m
1- 2 Months	10m	20m	20m 30m
2-12 Months	10m	10m 20m Working Depth	10m 20m 30m Working Depth
Over 12 Months	Pool Test# 10m	Pool Test# 10m 20m Working Depth	* Pool Test# 10m 2X20m 2X30m Working Depth

* In some countries this requires complete re-certification.
\# Open water in very sheltered conditions may be suitable for these tests in a warm climate.

4.10. Team Compatibility

Where projects involve the use of specialized equipment, or work in extreme or potentially hazardous conditions, an important factor of safety is the degree of team-work. In these circumstances the known or recorded qualifications of team members are not in themselves a guarantee of safety, and the divers should be trained together frequently until the required degree of cohesion and mutual trust is developed. If diving is to be carried out in pairs the Chief Diver/Dive Supervisor may establish fixed pairing for the work as it becomes clear which divers work best together. If a more general degree of team unity is required, diving pairs may be switched around, but it becomes important to drop from the team any individual who turns out to be incompatible with more than one or two of the other divers. This requires a great deal of discretion on the part of the Diving Officer or Chief Diver.

4.11. Compression Chamber Dry Dives

On the first occasion of extensive work planned below 30 meters it is advisable that divers should be exposed to the proposed working depth in a compression chamber where this is possible. This enables the project organizer to assess the ability of the divers to perform complex tasks while suffering from narcosis. Furthermore, the decompression phase may reveal personnel who are exceptionally liable to bends. Where extensive deep diving is carried out supported by an on-site compression chamber, it is advisable that several members of the team should be fully trained in chamber operation at a recognized school, since if only one operator were trained, there would be a dangerous situation if that person suffered a bend (4.2.4; 11).

4.12. Recognition of Other Training Qualifications

The CMAS has produced an international comparison of certificates and qualifications issued by sport diving certifying agencies, with equivalence of standards (Appendix 7). Using this system of comparison, the CMAS Scientific Committee has developed a scientific diver certification (Brevet) based on the sport diving certifying criteria in different countries at the 3-Star level. The application form can be copied from Appendix 10.

As well, in several countries (e.g. Canada, the United States, the United Kingdom, South Africa and Germany) organizations have been founded to establish and maintain national standards for scientific diving. A number of authoritative national standards are now available. Three of these have been primarily consulted in developing the training criteria set down in this Code of Practice (Appendix 13).

Institutes are recommended to certify their divers to the standards of this Code of Practice as a minimum international standard and to qualify divers to a higher standard in specific skills where necessary because of national or regional diving practices. In countries where no national or regional training standards for scientific diving have been set, establishments may supplement the minimum requirements of this Code with higher standards based on sport diving training programmes or their recognized CMAS equivalents, or commercial standards in mixed gas diving.

Full recognition should be given to training qualifications of military and commercial diving schools. In view of the lack of accepted certificates of working experience, Diving Officers should inspect log books of personnel from other institutions or from abroad. Chief Divers/Diving Officers should bear in mind that a highly trained diver from a foreign country may have a totally different range of practical experience and skill from that required locally. (See also 1.2; 1.3; 2.7).

4.13. Mixed Gas Training

Scientific work may require the use of mixed-gas breathing equipment (7) for specific work-related purposes, for example, to diminish inert gas narcosis, to give increased endurance, to minimize acoustic noise or to *eliminate the visual or mechanical disturbance caused by exhausted bubbles*. In view of the complexity of the equipment and the need for an exceptionally high standard of maintenance and adjustment of the sets, potential users should attend an appropriate and recognized training course.

Commercial diving schools, military training schools, and in some cases government agencies (e.g. the National Oceanic and Atmospheric Administration Diving Unit in the United States offers mixed gas training) are potential sources of mixed gas training courses for scientific diving programmes and should be consulted as a resource.

Before use of non-scuba breathing systems, a check should be made of government regulations and professional and industry standards covering use of oxygen and mixed-gas systems, closed-circuit and semi-closed circuit diving equipment, and training for use of these systems and equipment in the country of the potential user. Constant training must be maintained when using mixed-gas equipment and a program of continuing training should be developed based on these requirements and the recommendations of the training agency and the equipment manufacturer

A number of authoritative standards for mixed gas diving have been developed (Appendix 2).

SECTION 5. EQUIPMENT MAINTENANCE

5.1. Introduction

All diving equipment used under the auspices of a research organization must, regardless of ownership, be inspected and serviced by an individual or facility approved by the Diving Control Board/ Diving Officer. The Chief Diver/Diving Officer is responsible for restricting or removing from service any diving equipment that does not conform to the standards of the Diving Control Board. The Diving Officer is also responsible for evaluating equipment maintenance programs and assuring that a record of all inspections and equipment overhauls is forwarded to the Diving Control Board.

All scientific divers are expected to perform a basic inspection of their own and their teammate's equipment prior to each dive. All equipment must be in good serviceable condition: deficiencies demand the cancellation or termination of the dive. All equipment problems must be brought to the attention of the Diving Supervisor. Each diver is responsible for the care of any items of equipment that are issued to him or her.

5.2. Statutory requirements

In many countries there are statutory requirements that apply to the equipment used by all divers, scientific as well as sports and commercial. Normally such regulations involve the testing and inspection of high pressure cylinders, valves, regulators and pressure (contents and depth) gauges. It is imperative that all such statutory requirements be met. A complete list of all maintenance items and periods, for all diving and support equipment used, should be part of the institution's Code of Practice or internal safety rules.

5.3. Technical and maintenance procedures

All inspections and overhauls referred to in this section, except those suggested for the diver, must be performed by an individual or facility approved by the Diving Control Board/Diving Officer. All equipment that fails to function in a satisfactory fashion or that is found lacking during a diver's check must be tagged and removed from service until repaired. All diving gear that is fit for subsequent work must be properly rinsed or washed, dried if possible, and stowed as soon as possible after use.

5.3.1. Scuba tanks and other refillable gas cylinders

High pressure cylinders should be inspected for external damage before and after each dive, be visually inspected internally prior to first use and at least every year thereafter and hydrostatically tested every five years. Most manuals and codes of practices of national federations specify inspection methodology.

In countries where compressed air cylinders are required by statute or custom to be painted in a distinctive color or manner, all cylinders used in scientific work should be so painted. Care should be taken that the painting process does not heat the tank above 200 degrees centigrade and thus weaken the cylinder.

If cylinders are to be stored for some time, they should be internally inspected to assure that there is no water in them. Cylinders should be filled to 5-10 ATM and stored in an upright position whenever possible.

5.3.2. Scuba regulators and submersible pressure gauges

Regulators and submersible pressure gauges must be functionally tested by their user prior to each diving session. They should be disassembled, inspected and readjusted twice yearly, more frequently if used for deep or unusual diving operations or if they exhibit any signs of malfunction such as increased breathing difficulty. All hoses must be inspected often and silicone spray or grease (NOT PETROLEUM) should be applied to the dried, first stage water chamber of the regulator from time to time. Breathing gas pressure gauges should be accurate to within 5% of the actual pressure over their entire range. "Zero-errors" are the most critical and should be marked on the gauge face.

5.3.3. Depth Indicators (gauges)

Non-capillary depth gauges (including decompression computers), should be tested prior to first use, at six month intervals and at any time that they appear to disagree by more than 2% with another gauge or a known depth. Gauges should be tested against a master instrument of 0.25% accuracy or a measured shot (down) line. No gauge should at any time read any shallower than the actual depth. Gauges should be tested at least at depths of 6 meters and 45 meters. At 6 meters, new gauges should not read more than 6 meters plus 1% of the full scale, but used gauges may have twice this error. At 45 meters new gauges must read no more than 45 meters plus 3% of the full scale and used gauges must be within 5% of the full scale. Gauges that do not meet these performance specifications must be repaired and retested or discarded. A calibration tag indicating gauge variations at selected depths should be carried by the diver in an accessible location. Variations can also be marked on the face of the gauge.

Depth gauges should not be transported in the baggage compartment of an airplane or in an unpressurized aircraft since the low pressure may damage

the instrument. Small, air-tight containers are available to alleviate this problem.

5.3.4. Compressors and storage banks

Compressors should have the air intake located in an area where the atmosphere is clean. Intakes must not be exposed to the exhaust of internal combustion engines or air that is contaminated by any other source. The intake must be equipped with a suitable dust filter. Commercial filter material should be used rather than improvised materials designed for other purposes such as towels that have recently begun to be treated with deoderant chemicals, which could be harmful to the divers if inhaled. If the intake is extended, it must be protected to prevent the entry of excessive amounts of moisture. The total length must never exceed the manufacturer's specification. Appropriate filters and separators must be incorportated into the compressor and filling system in order to remove moisture, oil mist, particulate matter and odors. All compressors must be operated in accordance with the manufacturer's instructions and specifications. All pressure fittings, hoses, plumbing and pressure system components should have a maximum burst pressure at least four times the planned maximum working pressure. Slow opening shut off valves should be used to control air lines that carry pressures in excess of 30 ATM.

When a compressor is used to supply a diver in the water through a hose, the system should include a volume tank with a check valve on the inlet side, a pressure relief valve, and a drain valve.

Air quality should be analyzed every six months or 25 hours of operation, whichever comes first, by means of samples taken at the connection to the distribution system, to ensure purity for breathing in accordance with local regulations or statutes. Suggested air quality standards are: Nitrogen - 79%, Oxygen - 21±0.05%, Carbon Monoxide - less than 20 ppm, Carbon Dioxide - less than 1000 ppm, oil mist - less than $1 mg/m^3$, no detectable gross moisture, dust or particulates and no noxious or pronounced odor. See Table 6-1 for a comparison of some accepted technical standards.

Compressed gas storage cylinders should be stored in a ventilated area and protected from excessive heat. They should be secured from falling and have shut off valves recessed into the cylinder or protected by a cap except when in use or when manifolded. Cylinders should be inspected and tested as outlined in section 5.3.1.

5.3.5. Underwater tools

Underwater tools such as hand held electric power tools or other powered equipment must be approved by the Diving Control Board/Diving Officer. When supplied with power from the surface they must be disconnected from surface power before being place into or removed from the water. Power must not be turned on until requested by the diver.

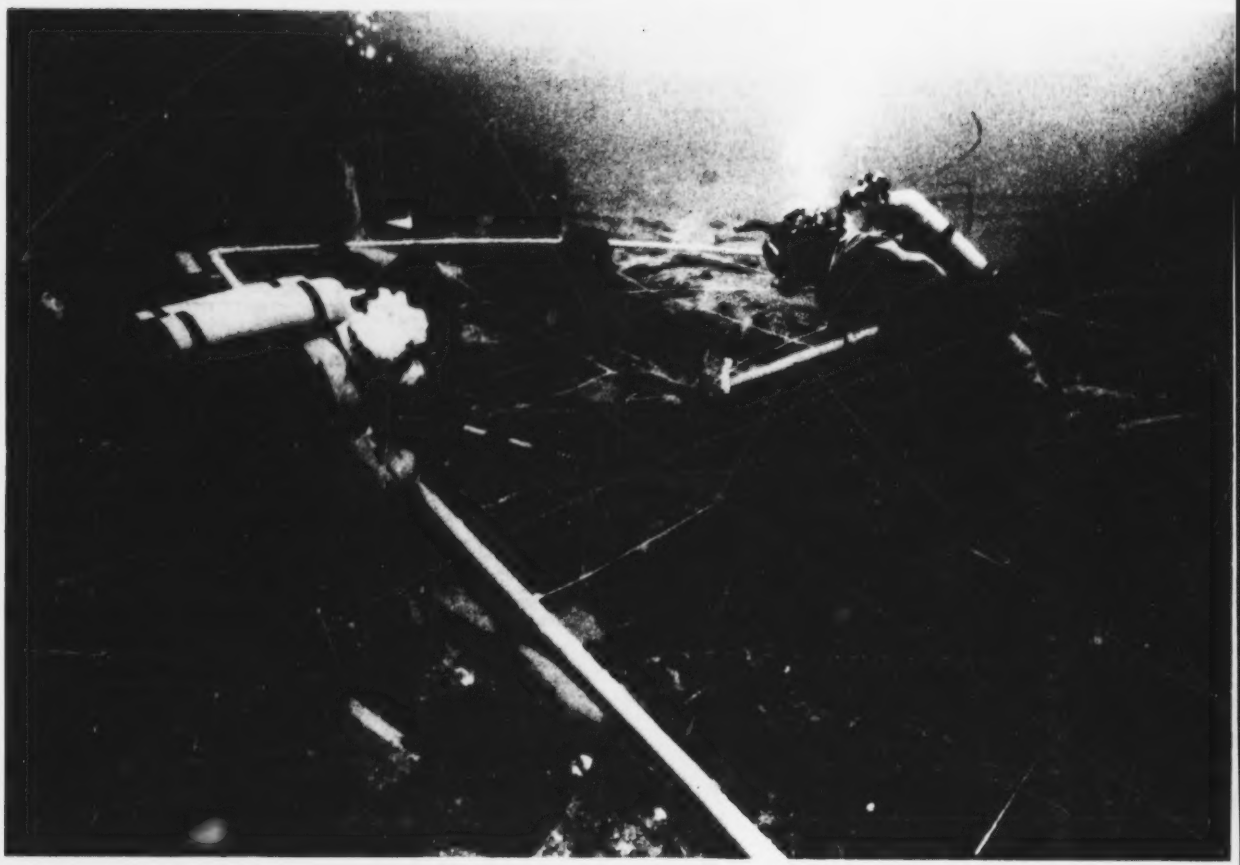

Photo 1 : Divers working on an archaeological wreck off the coast of Norway. Diver training must include enough realistic work experience to make sure that scientists and archaeologists will be useful when confronted with complex tasks underwater. These divers are wearing dry suits and single-hose regulators to clear sediment off the wreck, and measure artifacts within a bottom grid. (Photo, Auken).

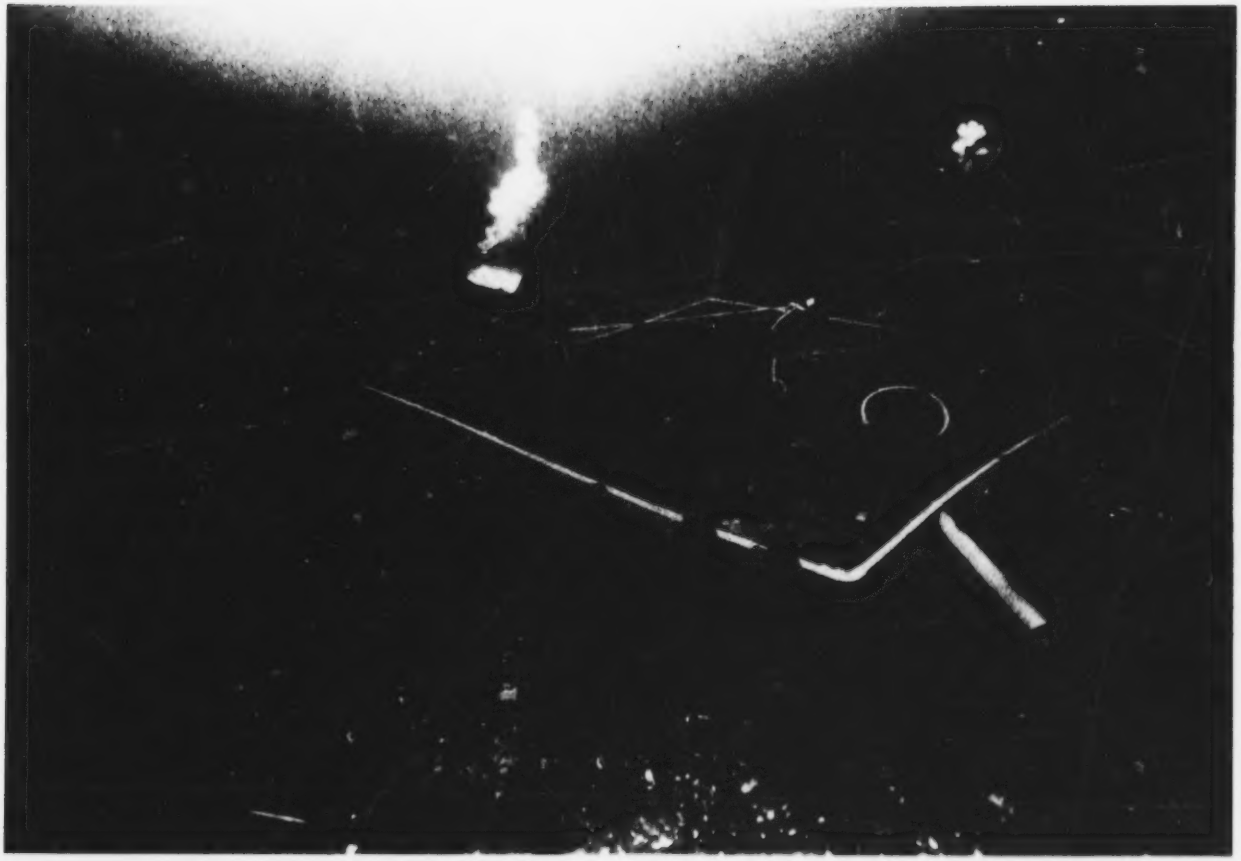

Photo 2 : Another view of the Norwegian wreck, showing the array of equipment, tools, ropes, and a camera with a large flash attachment resting upon the debris of the wreck itself. Divers have to be very careful moving in such an environment. (Photo, Auken).

Photo 3 : A diver testing and sampling sediment over wreck using a geological auger. The vertical column in the background is the barrel of a bronze 36 pounder gun on the wreck of the Kronan. The location is near ..... Sweden. The diver is wearing a foam neoprene air-inflated suit. (Photo, Kalmar Lans Museum).

5.3.6. Special equipment

Special equipment requirements and regulations shall be promulgated as required. See Section 10.

5.4. Records of maintenance checks, test and repairs

Maintenance logs or records must be kept for all equipment that is subject to inspection and service. These records must be available for inspection by the divers or the authorities. Divers are entitled to copies of records for any equipment that they have signed out. The Diving or Equipment Officer is entitled to inspect records of all equipment that is brought into a project under his or her direction or authority. Statutory bodies may require documentation of ownership and other records of some types of diving equipment. Each equipment modification, repair, test, calibration, maintenance and sometimes use, should be logged. A log should include the date, nature of the work performed, serial number and nomenclature of the item and the name of the individual or facility performing the work. Items for which such records should be kept include: compressors, scuba regulators and cylinders, gas storage cylinders, pressure and depth gauges, scuba cylinder valves, ABLJ's, dry suits and analytical instruments used for service or inspections of diving equipment or breathing gases.

SECTION 6. SAFETY

6.1. Pre-dive safety

Prior to the divers assembling at the dive site, several matters have to be considered that are important to safety.

6.1.1. Dive planning

Detailed recommendations for the conduct of diving operations in certain special conditions are given in Section 8. These must be referred to and combined with the general recommendations in this Section as appropriate.

The dive planning of any underwater project must take into account scientific objectives and psychological and practical limitations. Therefore realistic planning is best carried out by people with both scientific and diving training. When the Chief Scientist has no diving experience it is essential that the Institute Diving Officer be consulted about, and the Chief Diver involved in, the detailed planning of operations. Their responsibility shall be to maintain the highest possible standards of safety.

Efficiency in underwater work depends upon making the most effective use of the limited number of underwater man-hours per day. The right research questions must be asked and means devised of collecting data to answer these questions quickly and accurately. The scientific problem must be extremely well defined at different investigative levels so that changes in planned dive sites or dive profile/times can be made in response to data already gathered. Very few project diving plans ever are carried out exactly as conceived prior to the beginning of the project; the success of a project often resides in the adaptability of the planning. In addition, equipment which is not necessary to the efficient conduct of the diving such as complex camera and tape-recorder systems and their ancillaries can divert attention from the more basic but important diving gear. No more equipment should be employed than is necessary. The equipment mix that is deployed underwater should be familiar to the divers through prior training.

Diving and scientific equipment check lists which should be waterproof must be used at the operational base and if necessary on the small boat used for surface cover. A diving safety box, including oxygen, should be carried in the small boat (6.2.5). Whilst every effort should be made to provide self-sufficiency in safety and back-up facilities, the following information should be held at the operational base and on the cover boat, which in the case of an emergency might have to return to shore and immediate aid at some point other than the operational base. The following information should be immediately available in the case of an emergency:

1. Name, address of the nearest doctor, ambulance facility and hospital.

2. Location and telephone number of the nearest compression chamber.

3. Location and contact procedure for helicopter rescue if relevant.

4. Telephone number of local coastguards, marine rescue units or police.

5. A map showing the exact position of the above rescue and medical facilities and the position of telephones nearest to shore access points in relation to the diving area so that any member of the diving party will be able to get help in the shortest possible time. This becomes more important in more remote areas and where short wave radio use is not common.

6. A list of available radio frequencies and information about their use such as when they are monitored etc., which can be raised by the radio equipment carried by the diving party.

Daily information from appropriate weather forecasts should be obtained. Land, shipping or inshore fishermen's forecasts should be used as appropriate for the area. Special note should be made of changes of expected weather that might affect the safety of operations, e.g. wind strength or direction change and fog. Information on tidal streams and currents should be sought from marine charts, tidal atlases and pilots. These should be supplemented, when appropriate, by local information from seamen and fishermen.

A first aid kit should be available to the diving team and two members of the team should be qualified to use it. All divers should be trained in expired air resuscitation (mouth-to-mouth) and external cardiac massage. In remote locations a full medical kit should be carried, and at least one person should be trained to paramedic standards.

6.1.2. Personal equipment maintenance (See also Section 5.1.)

Each diver is ultimately responsible for the maintenance of their own diving equipment, which if it is not personally owned should be assigned on a permanent, seasonal or project basis and not re-assigned from the equipment store daily or weekly. The longer period the that a diver has to become used to personal equipment the better, in that its peculiarities can be assessed and either compensated for or taken advantage of during use. Additionally, if a diver is assigned gear for a considerable period of time, the gear tends to get better looked after.

All diving equipment shall be inspected by the diver for proper functioning at the beginning and end of each diving day. Equipment to be inspected shall include, but not be limited to:

1. All straps, hoses and soft items (rubber, nylon, etc.) for cracks, dry rot and/or other signs of deterioration.

2. Wet or variable volume dry suits for tears, zipper, seals, etc.

3. Scuba cylinders for damage, proper pressure and valves.

4. Regulators, hoses, fittings, accessories, mouthpiece, etc., for tightness, cracking, etc.

5. Weight belts and buckles.

6. Buoyancy control devices and all mechanisms that could jam up with salt including direct feeds.

7. Diving knives, inflatable buoys, ropes and all snap clips.

8. Any accessory equipment such as dive lights, cameras, data recording sheets, etc.

Every reasonable effort shall be made to prevent damage to equipment during the diving operation.

Any malfunctioning item shall be individually tagged giving the name of the user (or the person who noticed the malfunction), date and nature of the malfunction. Tagged equipment shall be brought to the attention of the Diving Officer or Equipment Officer at the earliest opportunity.

6.1.3. Purity of air supply

Compressed air shall only be obtained from sources known to conform to approved national standards and in the absence of a national standard to a standard recognized elsewhere (Table 6-1).

If compressors are used in the field, frequent attention must be paid to the siting of the air intake in relation to fumes and smoke, not only from the compressor, but also from vehicles, boats and houses in the vicinity. The intake is best fitted with a suitable length of flexible pipe to allow for changes of wind direction. Adequate cooling is essential in order to prevent contamination of air by overheating of lubricating oils. The nuisance caused by compressor noise in public places is to be borne in mind and minimized.

In a permanent laboratory site times of compressing may need to be restricted according to wind direction in relation to sources of air pollution.

Precise adherence to manufacturer's recommendations in relation to filter replacement, maximum continuous running time and cooling is essential.

A compressor log-book shall be maintained to show running times, maintenance checks and filter changes. A running-hour meter is advisable (See also Section 5.3.5.).

The use of "breathalyser"-type tubes for gas analysis is strongly recommended for carbon dioxide and carbon monoxide, nitrogen dioxide and nitrous oxide. Further checks for hydrocarbon contamination are given in Stubbs and Roberts (1970).

	United States Navy	Canadian Standards Assoc.	University of California Dept of Marine Resources	British Standards Assoc. (BS 4001)	British Sub-Aqua Club	Canadian Association for U/W Science
Nitrogen	As atmospheric air - 79%	As atmospheric air	As atmospheric air	———	As atmospheric air	
Oxygen	20-21%	———	As atmospheric air	———	21% ± 0.5%	
Carbon Dioxide	Not more than 0.1%	0.05% (500 ppm)	0.03% (300 ppm)	500 ppm	0.03% (300 ppm)	500 ppm
Carbon Monoxide	20 ppm	10 ppm	*20 ppm	10 ppm	5 ppm	5 ppm
Oil	130 micro-grams per litre	1 mg per M^3	Free from droplets of oil	1 mg per M^3	1 mg per M^3	1 mg per M^3
Water	Free of gross moisture	As dry as possible. Should not condense	Free from drop-lets of water	As dry as possible and not give rise to condensation at temperatures above 40°F	0.02 grammes per M^3 at N.T.P.	
Solid, Particles Dust, etc	Free of gross dust and foreign matter	Free from dust, dirt and metallic particles	Lack of residue on a Whatman 40 filter after passing 5000cc of air[1]	Free from dust dirt, or metallic particles	Lack of residue on a Whatman 40 filter after passing 5000cc of air[1]	
Odour and Taste	———	Free from all odious taste or irritating substances	Absence of odours and vapours	Free from odour and toxic or irritating ingredients	Freedom from both	Free from odour
Nitrogen Dioxide & Nitrous Oxide	———	Covered by above	———	———	NIL (under 1 ppm)	0.2 ppm

* Not more than 10 ppm for decompression dives
[1] Whatman 40 filter, rated as fast and of mean pore size 3.4 to 5 microns

Table 6-1 Air Purity Standards

Periodic analyses should be made of the gas from cylinders filled before and after periods of maximum continuous running, and before and after filter changes. A complete analysis shall be made in the event of an accident, or if a diver complains of headache or respiratory distress during or after a dive.

Particular care to prevent contamination of breathing apparatus by dirt, oil and grease is essential after repairs.

6.1.4. Fire risk

The atmosphere in compression chambers frequently contains a higher partial pressure of oxygen than normal air at one atmosphere, and therefore is capable of sustaining rapid and violent combustion. Several fatal accidents have occurred as the result of fire in compression chambers. Most of the causes can be eliminated in the design of the chamber, but all chamber operators should be aware of the risk, and ensure that combustible materials and sources of sparks or ignition are not taken into compression chambers. The deliberate use of high oxygen partial pressure to speed decompression or improve therapeutic treatment has increased the potential fire risk.

Experiments have been conducted with a variety of chemical, gas and foam fire extinguishing systems in high pressure oxygen-rich environments, but most systems are either relatively ineffective, or produce toxic side effects. At present water is the best all-around extinguisher, and is best applied as a steady spray (Shilling et al., 1976).

General rules for providing fire safety in a hyperbaric chamber:

1. Oxygen concentration and/or partial pressure should be as low as possible, preferably within the region of noncombustion. It is essential to use an overboard dump system where pure oxygen is breathed by mask in a chamber.

2. Ignition sources must be eliminated.

3. Combustibles should be minimized, with the complete exclusion of flammable liquids and gasses, oil and grease.

4. If combustable materials must be employed, their type, quantity and arrangement in the chamber must be carefully controlled. Potentially combustible materials should be chemically treated if possible.

5. Fire walls and other containment techniques should be utilized to isolate potential high-risk fire zones.

6. A fixed fire-extinguishing system should incorporate smoke detectors and both manual and automatic switches; it should provide rapid and sufficient agent discharge.

Other risk of fire on a scientific diving project is a normal consequence of having items like neoprene, hydrocarbon fuels, alcohol and various solvents and paints, etc. present for the normal progress of the project. These risks are not particular to the diving but to the materials. High oxygen partial pressures alone distinguish the diving related fire risk.

6.1.5. Food and drink

In most circumstances normal daily food and fluid intake is left to individual discretion. At the beginning of a diving day, however, it is a good idea to eat a carbohydrates and fat rich breakfast for long-term energy supply. In the middle of the day high energy foods which are sugar or calorie rich that can be converted rapidly into energy to get through the rest of the working day are best followed by a snack of the same high energy transfer food later in the afternoon especially if it is a long, arduous day. High protein foods will be best used by the body in terms of overall food type during the course of a working scientific diving project.

Where diving is to be conducted in remote areas necessitating the issue of rations a balanced adequate diet must be planned and adequate fluid intake ensured. Medical and dietary advice should be sought before leaving for such areas.

Salt supplements must be issued in hot climates.

Diving should be avoided for 2 hours following a heavy meal. Regular light meals should be taken during the day's diving operations. Liquid intake must always be maintained at least to normal levels, as it is dangerous to become dehydrated prior to dives that may require decompression (See Section 11).

6.1.6. Alcohol

Alcohol may increase the susceptibility to decompression sickness, and may enhance heat loss in cold water exposure. In a diver who is slightly hypothermic, alcohol may make the condition more serious.

Alcoholic drinks must not be taken until after normal diving and follow-up operations for the day are over.

Alcoholic drinks should be consumed only in moderation during the course of prolonged diving operations.

Alcoholic drinks are not recommended for 24 hours before diving operations to depths in excess of 30 meters.

Diving with a hangover is dangerous.

6.1.7. Sleep and fatigue

Adequate rest and sleep will be defined by the requirements of the diving program, and the fitness of the diving personnel. During diving, fatigue is dangerous, and a tired diver should not be permitted to dive. Sleep and rest periods should be built into the planning of a project as different scientific work requires different levels of follow-on work in the evening. Diving geologists, for instance, usually only require a limited time for recording and analyzing data after the diving and equipment care is complete; whereas the day of a diving zoologist may only be beginning at the end of the diving and equipment care, with numerous samples to preserve and classify. The nature of the specimen taking and the scientific follow-on work must be taken into account by the Diving Officer and Chief Scientist in developing project plans.

6.1.8. Cold (See also Sections 8.2.2. and 8.2.3.)

A cold diver is liable to rapid fatigue and to errors of judgement. He/she will be less able to cope with emergencies, or with diving tasks, and will be less able to concentrate. The combination of fatigue and cold should be avoided at all costs in diving operations. If this is not possible abandonment or serious revision of the diving program must be considered by the Chief Diver/Dive Supervisor if accidents are to be avoided. A project plan which ignores divers' comfort, especially with respect to cold, will inevitably result in bad morale and less-than-enthusiastic divers. If the cold cannot be mitigated, it must be seen by the divers to be a fundamental concern of the Dive Supervisor in order to promote their cooperation and enthusiasm for getting the work done.

Divers continue to lose heat from their bodies for some time after they get out of the water. This 'after-drop' in central body temperature can reach dangerous limits even if at the time of getting out of the water the diver was in a reasonable state. The problems of cold exposure can occur in all waters, tropical as well as polar.

Some of the following precautions can be taken to help minimize the problems of cold exposure:

1. No currently available diving suit provides completely adequate thermal protection in the water. A dry suit with suitable undergarments and air inflation is more effective than a neoprene wet suit for diving work in temperate or sub-polar waters. Suit heating systems are available but all have operational limitations and their use outside of saturation diving systems or surface demand systems is unusual.

2. The divers should keep warm before the dive. Shore and boat parties should be kept sufficiently warm to perform their duties.

3. Limit dive times to reduce the amount of heat loss. Plan dives so as to avoid frequent immersion and draining of wet suits in cold water if possible.

4. Reduce the extent of the after-drop by immersion in a hot bath or in a hot shower in the diving suit if this is at all possible. Keep in a warm environment out of the wind and if wearing a wet suit, wear a wind-proof cover over the wet suit at least on the trunk of the body.

5. Allow sufficient time between dives for the diver to rewarm if possible.

6. Provide hot drinks and a high daily calorie intake during cold water diving. Alcoholic drinks must not be used to warm a cold diver.

7. Body temperature monitoring using either a rectal temperature probe or radiopill transducer in the intestinal tract should be considered for extensive cold water diving operations. A drop of more than 2°C or a level of 35°C is dangerous.

6.1.9. Heat

Excessive heat is not a problem common to most scientific divers except in special circumstances (8.2.23; 8.2.28.). In pool training where the water temperature may be well in excess of what the diver expects, as well as in the special circumstances, divers must take care not to become overheated and become hyperthermic. Muscular weakness, lack of concentration, slight trembling and the possibility of sudden blackout similar to heatstroke are all to be avoided by wearing no warmer diving suits than are indicated by temperature conditions and by engaging in no activities which involve extended overexertion when diving in hot conditions. The effect of hot water suit heating is difficult for the diver to judge, and there is a tendency to request increased heat up to the point where adverse symptoms occur.

6.1.10. Drugs

[See bibliography and Undersea Biomedical Society].

Drugs fall into two categories; those administered for medical reasons and those which are addictive or mood altering.

Under no circumstances should personnel who use addictive or mood altering drugs, or who have done so in the recent past be allowed to take part in any facet of a diving operation. Many of these drugs cause recurrent symptoms such as halucinations or schizophrenic behavior long after active use has ceased and any potential member of a diving team who has had a drug abuse history must be cleared by a doctor competent to consider the physiological effects of diving on drug syndromes. This prohibition includes drugs referred to as both hard and soft and it is mandatory that the Diving Officer insure that no drug affected personnel are involved in any operations and that no drugs are abused during the course of a diving operation.

In general medical use of drugs during diving should be avoided where possible. At present, there is considerable concern that the effects of many drugs in common use may change in hyperbaric conditions. Drugs can influence diving safety in indirect ways, by impairing judgement and concentration, or by increasing a diver's susceptibility to narcosis and decompression sickness. Individuals under medical treatment are, in general, unlikely to be diving. Chief Divers/Diving Officers should be aware that individuals may be using drugs to control common problems such as sea-sickness, headaches, colds, etc. This common practice of self-medication may present a hazzard, and the Diving Officer may wish to restrict their use, or restrict the diver's activities. Diving Officers should take medical advice in any case of doubt.

None of the practices listed below are encouraged but the most common forms of self-medication, with their problems, are listed for information.

1. Sea-sickness. Two groups of drugs are used:

a. Hyoscine: Drowsiness can occur, and if possible the drug should be tried initially during a period of non-diving sea-going. Proprietary drug name: Hyoscine.

b. Antihistamines: These are often more effective against motion sickness, but drowsiness is frequently marked. Considerable individual variation occurs in response to the drugs. They MUST be tried initially during a period of non-diving sea-going. Medical advice should be sought if a suitable drug is not found. Proprietary drug names: Cyclizine, Meclozine.

All other preparations are available on prescription or in a weakened form of these drugs. Consideration should be given by Diving Officers to restricting those on such drugs to diving support only.

2. Headaches. Pain-relieving drugs of all types should be avoided during diving. If pain is sufficiently severe to require drugs, then the diver is not fit to dive.

3. Nasal Catarrh. Routine self-medication with nasal drips to facilitate ear-clearing, etc., may be medically hazardous. Such routine use should only be undertaken under medical supervision. The presence of any form of upper respiratory tract infection (common cold, sinusitis, middle ear infection, tonsilitis, sore throat, etc.) imposes an absolute ban on diving until the infection has cleared.

A nasal spray by the name of Afrin is used by some divers who anticipate possible blockages of the nasal passages or sinus. Divers should inform the Dive Marshall/Supervisor if they are using this spray.

6.2. On-dive safety

On-dive safety includes the time spent dressing or kitting up and preparing for the dive and the time spent following the dive during which the diving team leaves the vicinity of the water with all of their gear and specimens. Too often dive safety ignores all but actual dive and boat time. Many fatal and other accidents are known to have happened during preparation and winding up of a dive. It is the Diving Supervisor's responsibility to have full control of the operation from the time that the divers approach the water with their gear to completion of the diving operation, with all gear stowed, and the divers no longer exposed to risk from normal working or boat-handling hazzards.

6.2.1. Dive safety responsibility

No set of recommendations are suitable for all circumstances and it must be the responsibility of the Chief Diver or Dive Marshal in the absence of the Diving Officer to decide if any usual safety measures are inappropriate in the local circumstances. This person should bear in mind the fact that weather, wind, sea state, tide and visibility above and below water can change during a dive.

6.2.2. Compatibility of equipment

Diving equipment varies considerably. As a general principle, equipment should be as compatible as possible within a group of scientific divers for operational as well as safety considerations.

Problems of compatibility do not occur with some types of equipment. They include the exact type of wet or dry suits being used, types of fins, snorkels, masks, standard weight belts, knives, depth gauges, watches and the make and model of ABLJ so long as the operation of the jackets are similar, e.g. direct feed and attached (emergency backup) regulator of the same pattern and operated on the same side of the jacket. Personal preferences or the available equipment, often personal equipment, will largely determine these items amongst the diving teams.

Other equipment is compatibility critical; that is if there is not compatibility of systems and use, the degree of safety is lowered.

1. All first stages of regulators must be useable on all air bottles. In the event of a bottle or a regulator being found to be incompatible, they should be immediately removed from use. If a diver has a matched bottle/regulator pair that is incompatible, no other equipment can be matched and used in an emergency and the actual conduct of the operation is much more difficult, especially where multiple dives are being carried out without recharging, and tanks have to be swapped.

2. All direct feed connectors should be interchangable so that no matter what regulator/direct feed combination was being used, it could be connected to any ABLJ, lifting device or other equipment in the diving party. Buoyant emergency rescue lifts are thus possible among members of the diving party without recourse to the emergency air bottle. In the case of dry suits all direct feed connectors must be able to supply air to all of the suits; incompatibility would be especially hazardous in the case of a bag dry suit with no natural buoyancy where air supply had run out and the diver's buddy could not supply air through the appropriate connector.

In some other cases, such as the similarity of regulators and the exact types of ABLJ, all divers should make practice or working dives using all of the equipment available to the party so that they are sufficiently familiar with it to operate it for another diver in the case of an emergency.

If more than one boat and engine combination are needed, it would be better if they are of the same make as the divers will become more familiar with the general operation and will be more proficient with this equipment under extreme or hazardous conditions.

If electrical equipment is being used the operating current and electrical connectors should be fully compatible.

6.2.3. Numbers of divers

Diving shall normally be conducted in pairs, one person being designated the dive leader for that dive. In a pair of experienced divers who have worked together to the extent of being able to anticipate each other's actions, private arrangements may be made regarding the management of the dive underwater, but the Dive Marshal should still indicate the official dive leader at least for the record. In the event of divers losing contact with each other, they should surface after an agreed time interval has passed and re-establish contact.

The presence of a fully dressed standby diver with minimum decompression loading, ready to enter the water, is strongly recommended in all diving circumstances and is essential in those in which higher than normal risks are involved. These include:

1. Operations at depths greater than 30 meters.

2. Diving on equipment or structures which are liable either to snag or entangle the diver, or to collapse.

3. Divers operating singly.

The stand-by diver shall be equipped with a tended line or surface buoy attached to sufficient line to enable descent to the maximum depth likely to be encountered in an emergency.

Circumstances may arise where the scientific objects of a project can best be achieved by divers operating singly rather than in pairs. There is no objection to this provided that overall safety is maintained. There must be adequate surface support. The use of a life-line, preferably incorporating a telephone, provides maximum safety. Alternatively, a line passing to a conspicuous surface buoy may be used. This must be attended by a surface cover. Diving alone without any form of line to the surface is very strongly discouraged.

Solo diving may only be undertaken at the discretion of the Chief Diver/Diving Officer, and will be subject to the following:

1. There is no logical alternative method of completing the job.

2. Either a diver's float or a safety line must be used.

3. All possible safety and back-up support is provided, including a stand-by diver, fully kitted. Depending on what statutory Regulations are in force, it may be necessary to obtain exemption in order to conduct solo diving or diving with a total team of less than a defined number of trained personnel, which varies from 2 to 4 divers present on site.

If circumstances dictate three divers working together underwater, then the Dive Leader should give clear instructions to the other two about position and distance keeping during free swimming. If four divers are involved, they should be organized as two pairs. These principles of organization should be followed if more than four divers are involved in any one job. An exception to this may occur during elaborate search techniques in which hand signals along a rope connecting a number of divers can be used by one Dive Leader to control a number of divers.

6.2.4. Diving from shore

One of the main problems faced by a project diving team making a shore dive is that very often there will be some distance between the nearest point that the land transport can approach the water and the shore entry into the water.

Care should be taken entering the water especially over rocks, and an agreed entry point chosen, bearing in mind changing conditions of tide level and wind.

Depending upon whether divers have snorkel cover, safety line or surface cover boat available, the distance swum should be such that rescue is possible in the prevailing sea and weather conditions.

A shore party should be at a position where they can see the divers, or their bubbles or their buoys. They should be instructed in hand signals so that they will be able to communicate with the divers and they should be given clear instructions on what to do in an emergency. They should be equipped with a rope for assisting the landing of divers and be trained in air resuscitation (8.2.7.).

Beach dives sometimes involve long surface swims to and from the dive site.

6.2.5. Diving from small boats

Small boats that can be used in diver support include solid hull, semi-rigid and inflatables. A small boat is one that can be transported by the diving team either using a trailer or carrying it in one of the vehicles that the diving team is using for transport. In most cases, small boats that are likely to be used by divers have outboard engines and equipment is carried in special racks or in tie-down bags or boxes rather than being carried in holds.

Scientific and boat equipment that is not already fully waterproofed should be carried in at least splashproof bags or boxes as small diving boats are usually wet to work in and in addition expose the divers to the weather. All equipment that is not actually being used should be lashed down out of the way. Dive planning should take into account what equipment must be carried, in what order it is going to be used and thus how it is to be stowed efficiently. This will also determine the order of loading of a small boat, which often must be loaded quickly under difficult conditions.

The dive plan should include consideration of dive teams and the order of diving which will determine who sits where and who kits up first, etc. A sensible disposition of personnel in the boat during diving operations can greatly facilitate a diving operation, e.g. all diver entry at a rope ladder deployed at the port transom by the boatman, who acts as the diver recovery helper during that period of time that he has to shut down the engine. To do this he never has to leave the engine in case a rapid start-up and quick manoeuvering is necessary. If the divers and specimens are coming in everywhere, some equipment or specimens will almost certainly be damaged.

Trust local boatmen about local surface conditions and the weather.

There should be two serviceable boats on the working site if possible, and if not the single operating boat should carry a spare motor, however small. Each member of the diving team should develop and demonstrate ability to handle the boat under all normal operating circumstances; skill in close manoeuvering in bad conditions are important as with rotating diving and boat teams, any member of the party might be the boatman in an emergency.

(See section 9 for boat particulars).

6.2.6. Diving from large boats

This sub-section refers to larger boats that are dived from directly and are yet small enough to manoeuver to pick up the divers. Diving from large ships (8.3.6) almost always involves the use of a small cover boat.

Boats in this class are usually small fishing or research boats up to about 20 meters in length with a freeboard of no more than about 2 meters to the deck space from which the divers are operating. Research boats almost always have detachable diving ladders which enable the divers to get back into the boat and temporary or permanent diving platforms are fitted on more highly engineered boats. Such platforms usually consist of a wooden or metal grid fitted at water level across the stern, with a fitted ladder that extends both above the platform and below water. Diving ladders should slope inward at the top and there should be a substantial hand rail from the top of the ladder for about 1m on the deck. Diver access to the water is by jumping from the deck or platform and access is up a solid divers' ladder that is sufficiently long (1.8m below water) to keep divers from inadvertantly going under the hull as the boat rolls. Diver access and working space is almost always near the stern of the vessel where the deck space in less encumbered, more open and where the lowest freeboard is usually found.

The captain or boatman must demonstrate his ability to pick up divers by approaching an anchored buoy slowly from the down-current side and bringing the boat to a halt with the dive ladder at, or within easy reach of divers who might be at the buoy. If at all possible, the engine should be shut down at pick-up point arrival so that there is no possibility of prop injury to a diver in the water.

In the case of an emergency, getting the standby diver to the position of the divers on the surface, who should never surface off the float of the shot line, will take longer than with small boat surface cover, even with a good boatman. However, an emergency should be dealt with by approaching the divers with the working boat.

All diving from a large boat should be done using a substantially weighted shot line and a float large enough to support the divers and the float in even a strong current (6.2.7.). The boat should remain in the close vicinity of the buoy, keeping downstream of it. An up-current approach to the divers on the float at the end of the dive with engine-off allows the divers to be picked up safely. It must always be assumed by surface attendants that divers are cold and fatigued, and every effort should be made to recover them quickly.

It is usually an advantage to operate an inflatable or a small hard boat in conjunction with any dive support vessel over 10 meters length.

6.2.7. Ropework, terminology, and use of ropes

(See also Sections 6.2.8.; 6.2.9.; 6.2.10.; and 8.2.4.)

Scientific diving depends both for safety and efficiency of work on the use of ropes and line in many different ways. Some of these lines are fixed lines on the bottom, some are attached to buoys or floats, and others are attached to the divers or between divers. Correct usage of ropes and lines can be an essential part of safe and efficient work. Incorrect use can result in delays, entanglement, and be a contribution to serious accidents.

In this section there is no attempt to describe the details of knots, correct rope materials, shackles, etc., which can be found in Manuals of Seamanship, or Diving Manuals. The intention is rather to show how each roping system can be used most effectively to maximize safety and accurate work.

Figure 6.2.7.a. shows the general deployment of ropes and lines for divers working on the or near the bottom and Figure 6.2.7.b. shows the general deployment of ropes and lines for divers working entirely within the water column from the surface. The terminology arises from the traditional vocabulary of fishermen and sailors, and cannot really be regarded as standard. Nevertheless, it is extremely important that a rope technique referred to in the text is correctly understood. For this reason alternative names have been shown based on different usage from several countries using English as a first language.

6.2.8. Buddy lines

Buddy lines are short lines of about a meter or two in length with snap-clips on both ends which are used for safely fixing one diver to another. Longer lines connecting divers underwater may be used in conditions of bad visibility but if there are any currents or obstructions which may foul the longer buddy line, their use is not recommended. If low visibility buddy lines are used, an agreed communication system using rope pulls must be agreed upon and practiced prior to beginning the dive.

Short buddy lines can be carried by the scientific divers but if both are working on the shot or sweep lines (6.2.10) a buddy line may get in the way and thus would introduce a hazard. A small float mid-way along the buddy-line can help to minimize the chance of snagging on the bottom.

A buddy line is a tool that can be used to maximize safety in certain diving conditions and on certain jobs. Conversely, there are other conditions and jobs where a buddy line would not increase safety and might cause problems. When deciding whether to use buddy line, or not, the Dive Supervisor/Person-in-Charge should consider at least these factors:

1. Are the divers likely to stay easily within visual range of each other throughout the dive?

2. Does the current or wave action tend to cause the divers to become separated beyond visual range?

3. Are both divers likely to be engaged in work that would prevent them keeping visual contact?

4. Are the divers encumbered with equipment and ropes in such a way that a buddy line might easily become entangled?

5. Are the divers working close to coral, wrecks, metal structures, kelp, or other features or objects that would cause entanglement?

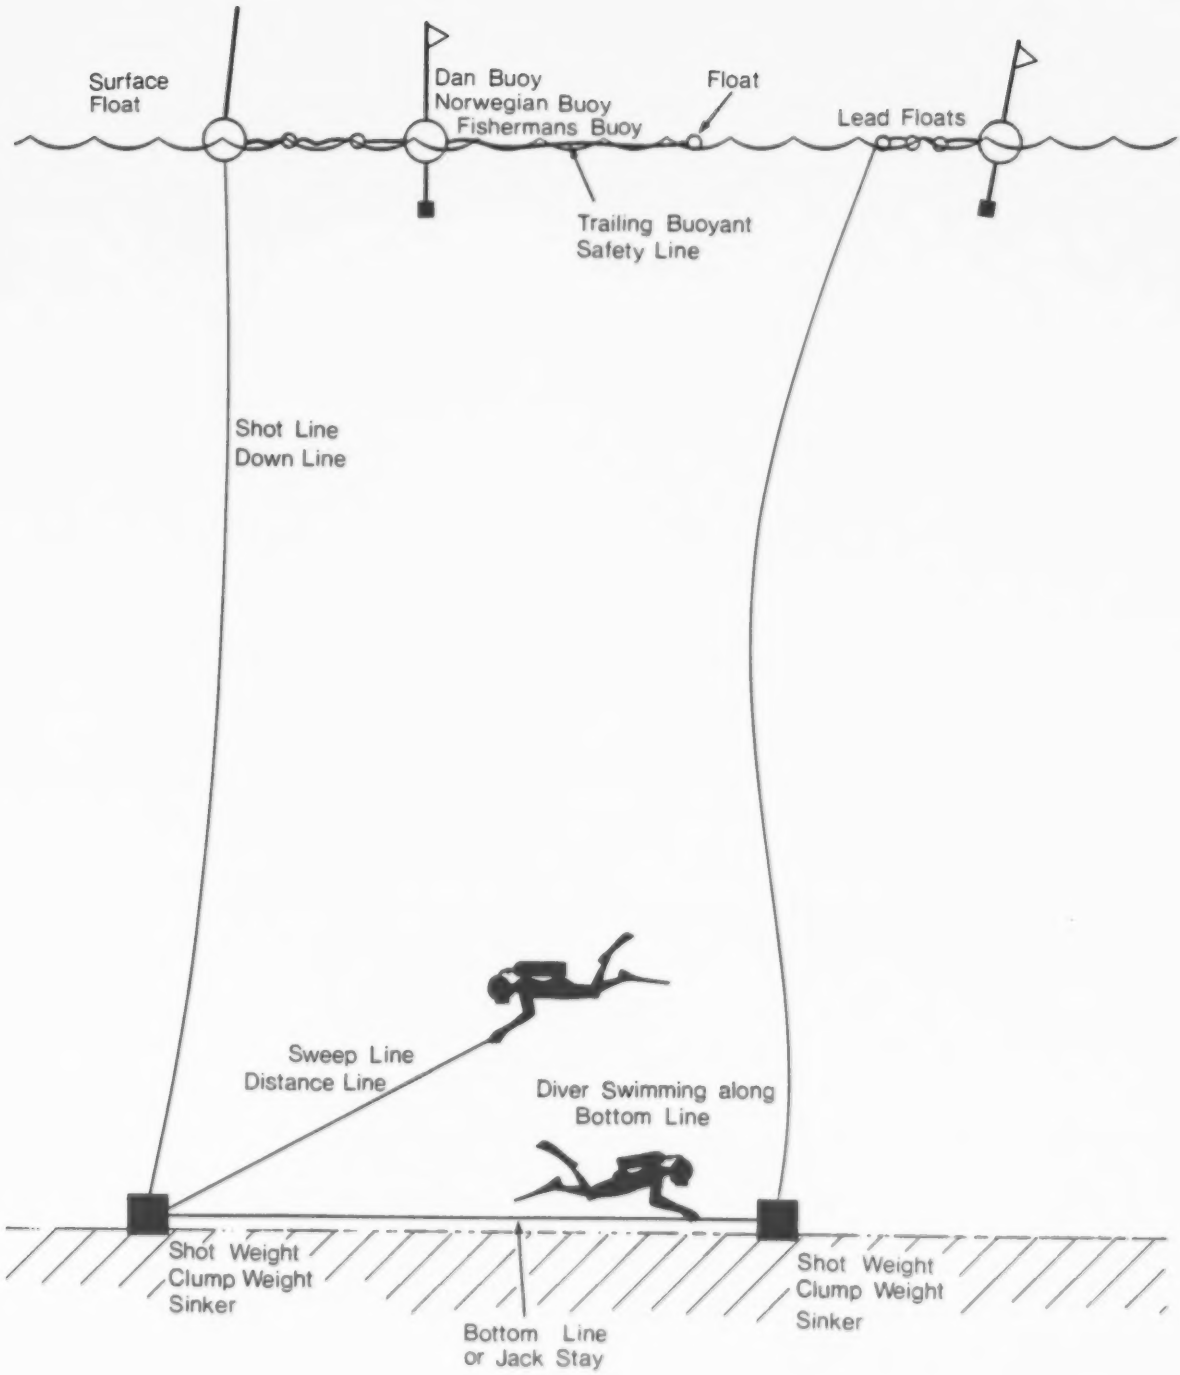

Fig. 6.2.7.a. Divers working from ropes and lines that allow the divers to work on or up from the bottom. Common names for the different types of ropes are given, with alternate names.

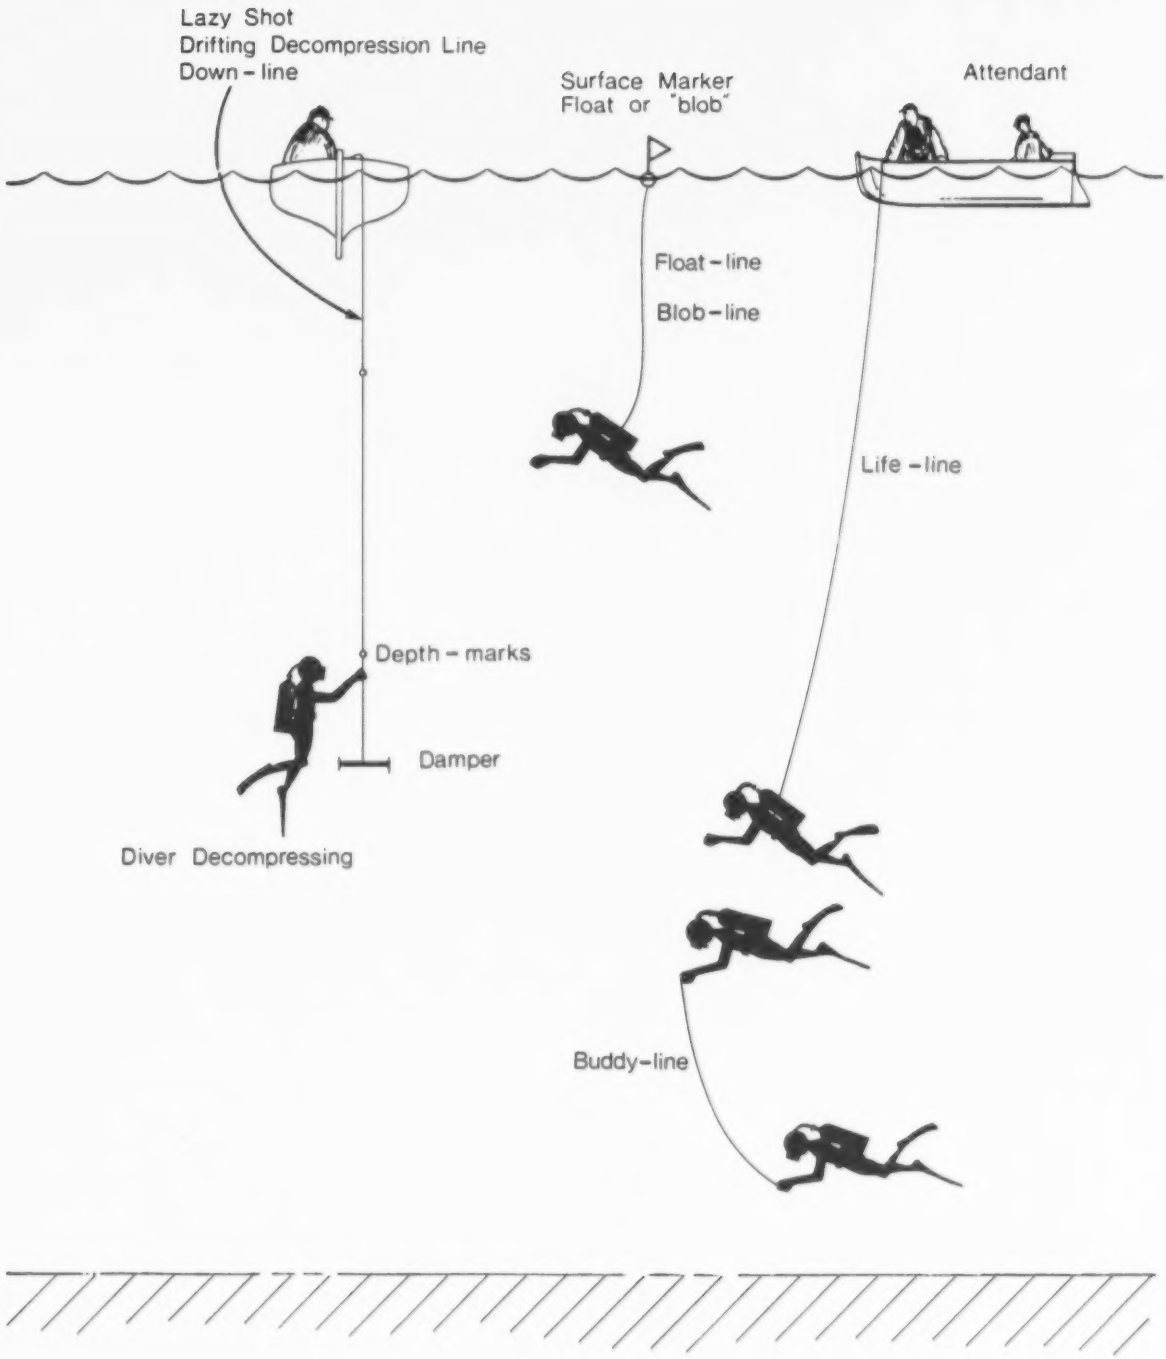

Fig. 6.2.7.b. Divers working from ropes and lines that have no component of interaction with the bottom. The divers using this system can work in mid-water, or in the surface waters of the deep ocean. Common names for the different types of rope are given, with alternate names.

The Diving Supervisor is responsible for assessing the job conditions and deciding whether to use buddy lines.

6.2.9. Life line

This is a line that connects a diver directly to a surface attendant. In surface demand operations (7.3), together with the air line and telephone line, this allows a single diver to work safely underwater. It must be securely attached round the body of diver, or to the special strong-point provided on some ABLJ's, and must be strong enough to support more than the weight of the diver and all of his/her gear in air. In the event of an emergency, the diver can be retrieved, and there is a line along which a standby diver can descend directly to the diver. Diving operations using life lines in deep water are usually confined to diving near to the work site in conditions of low current drag. In strong currents and shallow water a lifeline is useful, provided that the worksite is always downstream of the attendant.

6.2.10. Shot (buoy) and sweep lines

Fixed lines are usually needed in conditions where divers might get lost, disoriented, or separated from each other, or from surface cover. In addition, fixed lines can be an aid to accurate search and survey projects. These line systems are particularly useful in low visibility, coastal, tidal, and estuarine waters.

Shot and sweep lines are the common working lines for shallow water scientific diving and allow the divers to remain in communication with the surface party while operating in a wide variety of current and surface conditions safely. It is recommended that sets of lines of 10m and 20m lengths with snap-clips on both ends of all lines be prepared as a standard part of the project gear. A set of lines for one team should consist of a minimum of 3-20m and 5-10m lines. The ropes should be woven and not too soft with a tendency to go limp (nylon) and coil in the water or made from fibers that will fray and abrade a divers hands (blue polypropylene). 8mm Terrylene is a good line for small boat operation. These lines can then be deployed as any of the line sets used by scientific divers in the course of their operation. Use of the sweep and shot lines are discussed in diving in fast currents (8.2.8) and they differ substantially from the ropes used in blue water diving (8.2.4).

The shot line (buoy line, main line, down line) is the line between the surface buoy and a bottom weight or anchor and is deployed and recovered by the boat; its strength and length depends on the type of operation (current strengths are important) and the nature of the boat deploying it. Large boats can winch up heavy lines and weights but small boat parties can only bring up lighter lines and weights. In spot diving the line is usually well weighted but in drift or traverse dives, there is usually only a 1kg weight to keep the line under tension.

The sweep line (divers' line, horizontal line) is a short line deployed and recovered by the divers underwater from near the base of the shot line. It is usually 10m in length as this allows the divers to range safely about the bottom on the shot line and remain in rope communication with the surface. More than one coil of sweep line can be carried underwater.

The trailing line is 10m or more in length and fixed to the top of the shot line at or near the surface buoy. Its other end is supported by a small surface float. This line and buoy indicates current direction to the boatman, while at the same time providing a safety line for divers who may come off the shot line on ascent or at the surface.

6.2.11. Safety and equipment helmets

The use of safety helmets is recommended in certain situations:

1. When divers are working at or near the surface when cranes or derricks are in use from ship or shore.

2. When surface workers are using hand held tools above a shallow diving site.

3. When divers are working on underwater or floating constructions or apparatus which could move or collapse.

4. When divers are approaching rocks on or below the surface in rough water.

5. When a helmet provides a good place to affix specialized equipment such as lights (8.2.19).

Safety helmets should be well vented so that the diver's head does not momentarily become very heavy with the weight of water upon breaking the surface, and the helmets worn by canoeists are usually satisfactory for scientific diving (8.2.18; 8.2.19).

6.2.12. Communications

There are many forms of communication between divers and between divers and the surface:

1. Direct visual. In adequate visibility, hand signals, light signals or prearranged signalling such as written instructions and semaphore can provide good two-way communication. Standard lists of hand signals are published in Diving Manuals and log books.

2. Voice. In the water both telephone and wireless diver communication systems are available and must be used in certain situations such as surface demand unbilical diving. Voice communication between divers, and diver to surface, depends critically upon the design of the voicebox, auri-nasal mask,

helmet, or full-face mask. The use of a mouthbox or full face mask is essential for correct pronunciation of words underwater. Attention must be paid to equipment design and to breathing rhythm in order to prevent carbon dioxide accumulation. An air filled "underwater telephone booth" allows a number of divers to report to the surface by removing a conventional mouthpiece.

3. Other acoustic. Any pre-arranged signalling system such as revving the engine, banging on metal with a knife or small amounts of explosives can communicate or attract attention or convey a specific, pre-arranged instruction. Small explosives such as thunderflashes are fine in theory but are difficult to light in a small boat on a choppy sea in a rainstorm. They should not be used within 20m of divers and for best sound transmission should explode just under the surface of the water.

4. Rope or line. Rope signalling plays an important part in underwater communications in conditions of poor visibility or during rope searches where divers are spread out more than they would otherwise be during a normal scientific dive. The number of pulls to convey instructions varies from diving association to association and from country to country and any scientific diving which involves the use of rope communications must use agreed signals and procedures. These are usually published in Diving Manuals.

5. Writing. Scientific divers usually carry a plastic pad for writing notes with a pencil. This pad can be used to write messages between divers.

Any means of communication between divers and surface results in increased flexibility of operation, economy of diving effort and much greater safety. Incidents may thus be prevented from developing into accidents.

All systems of communication should have a normal operation mode- surface listening and diver speaking, temporarily switched for transmission. When more than two persons are linked it is desirable to have a simple rule of procedure by which speakers identify themselves.

If using a telephone cable passing directly to the diver, it should be fitted with a light float to prevent underwater snagging of the slack cable. It should be noted that the manufacturer's information about telephone cable breaking strains frequently does not apply to the contained telephone conductor. Undue strain should therefore be prevented. The support boat should be large enough to permit proper cable handling by the surface operator when telephones are being used. Wireless ultrasonic communications sets are waterproofed and small enough to use from normal diving inflatables.

Diving flags appropriate to country and diving code should be displayed to communicate the presence of divers to those who are not in the diving group.

6.2.13. Recall signals

The meaning of all signals must be agreed and understood. Any of the forms of acoustic or rope signaling (6.2.12) may be adequate. In an emergency, the ultimate recall is to pull up the shot line along with the divers on it. Care must be taken not to pull the line in too quickly. This method should not be used if there is any risk that the divers are not attached to the shot, or if the diver's sweep line could be fouled on wreckage, rocks or coral.

6.2.14. Homing gear.

Directional acoustic navigation aids can be used for free-swimming along a predetermined course or for returning to any point. Where any of these systems is used, the dive should be planned so that the apparatus contributes to diving safety.

Surface communication by VHF radio is recommended for operations in which the diving site and the small boat cover are situated at distances more than about 0.5km from the operational base or ship. This is particularly the case if the work involves changes of plan during a dive. Direct wireless communication from a diver via a cable to a surface buoy and aerial has been tried experimentally and might prove convenient in certain situations.

6.2.15. Buoyancy control

All divers shall wear a weight belt with a quick-release system accessible and capable of immediate release using either hand. Divers should ditch their weight belt before getting into a state of extreme fatigue. Institutions are encouraged to replace jettisoned weight belts at no cost to the diver.

Some cylinders in common use are so heavy that a diver wearing a twin set requires no weight belt. In this case the breathing set should be fitted with additional incompressible buoyancy so that a weight belt of about 4kg is required.

An inflatable life jacket or stabilizer jacket of the refillable air type (ABLJ) is almost mandatory now for the majority of scientific diving situations. It should be capable of being filled from an integral air cylinder of sufficient capacity to provide an emergency air supply to a diver making an emergency ascent and should not be used except in emergency. A direct-feed from the main bottle is useful in some types of diving. An integral direct-feed and emergency demand regulator which allows air from the life jacket to be breathed combined with a good ABLJ gives the diver maximum flexibility and safety and is recommended for all scientific divers.

The use of an ABLJ to assist in the lifting of heavy objects is dangerous, especially if heavy objects are dropped by mistake. The diver must be able to vent air rapidly from the jacket in order to prevent an

uncontrolled buoyant ascent. If heavy objects do have to be lifted it is recommended that a lifting bag be used except in conditions where this introduces additional hazard or where it is impracticable, such as in strong currents.

6.2.16. Free ascents

The routine training of divers in the practical experience of free ascent techniques is controversial. Some fatal accidents have occurred in training, especially in submarine escape training towers.

It does not, however, seem reasonable to advise divers to rely in emergencies on physical skills and psycho-motor co-ordination for which they have no practice. The control of venting of the lungs in such a way as to maintain a buoyant ascent at a gentle rate with minimum swimming effort and without straining the lungs requires a control that is not instinctive. It is unsatisfactory that many safety authorities presently advise divers not to do training, but to use the method in emergencies. Book learning cannot provide the conditioning of reflexes and instil the necessary confidence and relaxation.

If divers are going to be advised to use free ascents in emergencies, they should be given practical training under closely controlled and supervised conditions, with medical advice.

Legislation, sports diving standards, regulations, and naval practice, vary from country to country on this issue. Those divers who have been fully trained in the method tend to rely upon it with full confidence. The Diving Control Board/Diving Officer should decide on the evidence available whether it is better to approve the training, or forbid the use of the techniques altogether.

It is possible that the technique might be considered more acceptable in the disciplined circumstances of a well-controlled scientific diving program than in the sports diving environment. It is worth noting that divers will inevitably learn about free ascents from books, and may be tempted to experiment on their own if not properly taught.

6.2.17. Perceptual deprivation underwater

The undersea environment produces various psychological changes in the diver which are not necessarily attributable to narcosis. Diving presents a natural form of sensory and perceptual deprivation, and some of the effects of such deprivation, which have been demonstrated experimentally can be observed in the diver. These effects are even more pronounced when diving in turbid or mid-water.

Time duration is often underestimated, sometimes to quite a large degree, e.g. 50% or more. This should be borne in mind when diving with a limited gas supply.

Reasoning ability is impaired. This includes a wide variety of reasoning, such as mental arithmetic, logical comprehension and non-verbal reasoning. There appears to be a trade-off here between accuracy and time but this is not yet quantified. Errors are often made if one tries to solve the problem underwater in the same time it takes to do on the surface; whereas it often takes up to 60% longer to solve the same problem underwater, with usually a slight drop in accuracy. Where possible, all "thinking" tasks should be completed on the surface before diving. Also, data should be collected underwater in its raw form and analyzed on the surface. Decompression tables should not be worked out underwater, except in emergency.

Memory, both short and long-term, does not function well underwater. Godden & Baddely (1975) have shown, however, that items memorized underwater are better recalled there than topside.

In dives of a technical nature, e.g. surveys, thought should be given to debriefing the diver towards the end of the dive, while still underwater, or using umbilical systems with telephones to report data throughout the dive. This can be accomplished by giving the diver a formatted response sheet to complete for each job. Failing this, a response sheet may be given immediately on surfacing or while the diver is in a chamber. Such a sheet should take no more than 1-2 minutes to complete. A more efficient method is for the diver to give a verbal report to the supervisor over a diver communication system. If possible, this report should be recorded.

Where divers work in sequence on a task, it is advisable that they are debriefed immediately at the end of a dive, and that their observations are recorded in a standard format. This enables a consistant picture to be built up, in spite of memory problems.

Judgement/estimation of measurements is often unreliable, especially in turbid waters. Whether divers tend to under- or overestimate has long been cause for debate. Experimentally, both types of error have been reported (e.g. Luria, et al.; 1967, Ono & O'Reilly, 1971). However, more recent research (Leach, 1982) has shown that the more turbid the water, the greater the tendency to underestimate measurements-if the task is within the manual workspace. If the task is outside of the reach of the manual workspace, the tendency is to overestimate; there is a crossover distance at around 1.2m from the diver. In over 90% of cases, measurements are reported from within 1.2m. If measurements are to be made on a dive, then research tools should be brought underwater such as measuring tapes or scales printed on knives or other implements. As a last resort, all divers should know some of their own physical measurements, e.g. length of forefinger and forearm, span of hand, width of wrist, etc.

6.2.18. Narcosis and decision making

Inert gas narcosis impairs many aspects of diver performance, both in intellectual and manual skills. These narcotic effects, which have been likened to drunkenness, are normally felt at depths greater than 30 meters and increase progressively with depth. Stress and anxiety greatly exaggerate

the effects of narcosis and can impair performance even with the use of a non-narcotic gas (Helium). Frequently (daily) repeated dives tend to reduce these effects and increase the work capacity of the divers.

At depths greater than 50 meters, practice dives should be increased gradually to a depth slightly greater than the projected working depth, and should involve no work task. Only two divers should be involved. Only when divers are confident at depth should work be undertaken.

Surface/diver communication is strongly recommended, although care is necessary to avoid over-exertion and breathlessness from too much talking. Even if in communication, agreed dive plans should not be altered in mid-dive by decision of the divers who may be narcotized below 30 meters.

6.2.19. Decompression meters

Decompression meters of the 1960's and 1970's were analogue instruments that attempted to model the behaviour of the human body as it absorbed and released gas during an exposure to pressure and return to the surface. Simple tests showed that this approach could not model dives effectively, and was particularly unreliable in repeat dives.

Since 1980 a number of much more sophisticated instruments have been developed, modelling the tissues of the body with up to 12 different half-times from 5 minutes to many hours, and using physical or thermodynamic equations, which are re-computed digitally at frequent intervals. These instruments have proved more effective, and apparently safer. Since they give the diver many advantages, the urge to use them is very strong. However, some serious problems must be borne in mind. If we consider the apparent advantages first, the problems become clearer.

Apparent advantages:

1. The diver can perform a variable profile dive, not a rectangular profile dive, and the computer calculates only the gas that has actually been absorbed. Compared with the tables, which are based on a rectangular profile, there should be less gas in the body, and therefore the decompression required takes less time.

2. Decompression stops do not have to be carried out at any particular depth. As the diver ascends the computer calculates the rate of gas loss from each tissue, and indicates how much further the diver can ascend safely. The diver chooses the rate and depth of out-gassing to suit the work and weather conditions.

3. After surfacing, the dive computer shows how many minutes could be carried out, without need for decompression, at various depths on subsequent dives. The diver is therefore informed that it is worth re-entering the water to perform a short task, when, without the decompression computer, he/she might have waited several hours. Taken to its logical limit, divers use this information to carry out five or more short working dives in a day, where some repeat tables would have limited work to two dives, and others

would have required extremely complex calculations of uncertain reliability after the second dive.

These advantages are sufficiently important in terms of work achieved per day, and reduced costs and duration of projects, that they need to be very carefully examined. The key factor is that all the computers assume that solution and degassing are controlled by smooth analytic equations that are determined by the external factors of time and pressure only. In contrast, many physicians consider that there are some random and non-linear elements that initiate bubble nucleation and blood platelet accumulation. As soon as the diver ascends slightly and reduces the pressure, at any time during a variable profile dive, there is the chance that a bubble will start to nucleate. From that point on the critical equations, which determine whether the bubble will grow and cause a bend, are not those that are programmed into the computer. The designers of decompression computers reduce this risk by recommending very slow rates of ascent at all times, so-called "bubble-free" ascent. Again the evidence for the possibility of totally bubble-free ascent is controversial.

The viability and reliability of decompression computers will only be confirmed ultimately by the endorsement of physicians and experts in diving physiology. At the moment this endorsement is not forthcoming, although several thousand such instruments have been sold, and many divers use them without apparent adverse effects. However, until truly objective tests on thousands of dives and divers have been carried out and published, Diving Officers should treat these instruments with caution.

The displays provided by decompression computers vary. Different instruments provide different data on ascent time, duration to no-stop limit, surface interval time, permitted duration of next dive, etc. In all cases a partial ascent will result in the instrument computing the gradual de-gassing of the body, especially the faster tissues, regardless of whether the diver ascends to a specific depth and makes deliberate decompression "stops". Divers who use these instruments regularly tend to ascend slowly and steadily, often working during the ascent, and losing most of their gas at intermediate depths, rather than performing shallow stops of long duration. It is not clear how the instruments compute the effects of ascending too fast or ascending above the permitted "ceiling".

It is advisable to remember that the use of a decompression computer is likely to encourage divers to make many more dives during a day, and that the divers will then be working in a state that is not provided for by any published tables. Whereas a few repeat dives may be permitted by published tables, with a conservative safety margin, decompression computers can take no account of work level or cold, or other adverse conditions. As it is often the case with diving practice, experienced divers tend to play safe, and work slightly within the limits indicated by the decompression computer.

It is a sad fact that out of the millions of dives that have been conducted on scuba, accurate dive profiles have hardly ever been recorded. The traditional practice of recording time of leaving surface, arriving at bottom, leaving bottom and arrival at stops, and arrival at surface, is not enough to prove that two dives are identical. Thus the data base on which the effectiveness of decompression tables might be tested is very poor.

There is a further disadvantage attached to the present dive computers in that the dive profiles and decompression stops are not known and not recorded in any fashion. Apart from the total duration of the dive and the maximum depth, the diver has no data to enter into his/her log book. In the event of a pressure related accident the diver's exposure profile is not known, and similarly the profile and decompression stops for previous dives are unknown. From the point of view of verifying the safety of the computer formulae, maintaining safety in general, or checking the safety of the instruments themselves, this is a problem. It is strongly recommended that divers who use these instruments attempt to record their dive profiles, particularly the final ascent phase, as carefully as possible. It is also to be hoped that the manufacturers of such instruments will, in future, include a dive-profile play-back function, which would enable the diver to retrieve the critical depth-time data.(Hennessey, 1977).

6.2.20. Electronic instrumentation

Electronic instrumentation is rapidly replacing older techniques in scientific data recording underwater as the equipment becomes more specific, cheaper and easier to use. Direct measurement of environmental parameters such as oxygen saturation, temperature, salinity, etc., are now available to divers, at least for probe operation from small boats. This greatly facilitates much scientific work, particularly environmental studies bearing on organic pollution.

Electronic instrumentation in depth gauges, watches, air contents, diving computers, and decompression computers, are currently becoming available. There is no doubt that further development is inevitable (10.9) and that electronic instrumentation will make an impact upon science diving similar to that which has been made on many other fields of scientific endeavor.

6.3. Post dive safety

6.3.1. Diver location aids

The wearing of a fluorescent orange hood by divers if there is any chance of their surfacing at distance from the cover boat increases the chance of location.

Further diver location aids are flares, rockets, dye markers, whistles and radio and light beacons. These gadgets are neither foolproof nor entirely reliable, and all depend upon common sense for effective use. The following points are relevant:

1. If a diver surfaces away from the work site well within the planned dive time, he/she may not be missed immediately, and there will be less search effort than if he/she is overdue.

2. Depending upon surface conditions allowing divers' bubbles to be tracked, the occupants of the cover boat may realize that one diver has become separated from the others, and would probably know in which direction the diver disappeared. The lost diver may therefore be expected to surface in a predictable general area.

3. Owing to the diver's low position in the water, although at times he/she may be able to see the cover boat, the research vessel and/or the shore, it does not follow that persons at those positions will see the diver. Flares, rockets and dye packets should not be wasted, but used when there is a high probability of the searchers seeing them. For example, the lost diver should not let off a flare when a boat is heading away, but wait until it is heading in the diver's direction.

4. Searchers in a small boat are unlikely to hear a whistle with the engine running. If it is known that divers carry whistles, they should stop the engine at frequent intervals. If the diver can hear those quiet periods, this obviously is the time to use the whistle.

6.3.2. Diver recovery equipment

Equipment for the recovery of divers onto small boats are generally rope ladders and hand-holds on the small boats and rigid ladders on large boats. Large ships can have diving platforms or even interior wells into which small boats can motor directly from the sea or inclines similar to those common on whaling boats on which small boats can be 'beached'. A diver in trouble should be man-handled wherever possible and roped at other times so that circulation is not constricted. Davits or crane may be needed on large vessels. Excellent techniques for recovery of unconcious divers have been developed by Hendricks (1986).

6.3.3. Life-saving and artificial respiration.

Standard methods of life-saving must be taught as part of the diving training requirements for all divers. These methods are laid out in various countries in manuals and pamphlets. Life-saving associations and diving clubs and federations usually give courses which can be utilized by the scientific divers.

For deep diving operations, experienced divers should be trained by a qualified instructor in the techniques of deep diving rescue and recovery as laid out by CMAS and diving clubs and federations of clubs.

All divers should familiarize themselves with the procedure for Expired Air Resuscitation (EAR), and other forms of resuscitation, including external cardiac massage (ECM). These are also described fully in various diving manuals and handbooks (Appendix 2). Practical instruction in these procedures may be obtained through local Ambulance associations or from local safety groups. It is recommended that one or more members of the diving team at any project site should have received formal instruction in First Aid.

The administration of oxygen by first aiders has been questioned by some *non-diving authorites*. Oxygen is often considered to be a drug, and there are laws in some states that regulate the use of oxygen. Rescuers and divers should be aware of such laws, especially if they specifically forbid the use of oxygen in a first aid situation.

Supplimental oxygen is a very valuable treatment in the first aid management of air embolism and decompression sickness. Breathing oxygen will eliminate some nitrogen from the body by producing a nitrogen partial-pressure gradient between the problem bubbles(s) and the surrounding tissues. The pressure gradient causes nitrogen in the bubble to dissolve in the bloodstream and be eliminated through the lungs. Any increase in oxygen being supplied to the injured area will also be physiologically beneficial, especially if brain tissue is involved (See Section 11).

First aid courses should include training in administration of oxygen. Oxygen resuscitation equipment should be held at dive sites and on dive boats, provided that there is a person present who has been trained in its use.

Administering oxygen to a conscious, spontaneously breathing individual is not difficult and is usually safe with the proper equipment. The concentration of inhaled oxygen should be as near 100% as possible in order to achieve maximum benefit. A *demand- type oxygen breathing unit with a tight-fitting, double seal oral/nasal mask* and an adequate oxygen flow rate is necessary to deliver the required concentration. Constant flow devices (inhalators) using nasal cannula, simple elongated face masks, partial rebreather masks, etc., will only deliver low, ineffective concentrations (25% to 60%) depending on the metered flow rate. In the event that only a constant flow device is available, deliver oxygen at a flow rate of 10 liters per minute.

If the victim is unconscious or not breathing spontaneously, oxygen administration becomes more complicated. In this situation, the first aider must have a thorough understanding of airway management and the use of adjunctive equipment. Such techniques and equipment are beyond the scope of this code. The diver and dive leader can only be encouraged to acquire additional special training. Many community colleges and scientific institutions offer Emergency Medical Technician courses that include this type of training. Use of oxygen in the early stages of managing a diving accident victim may reduce or totally relieve the symptoms within a short time. If this does happen, do not be deceived into thinking that the problem has been completely resolved. Oxygen breathing must be continued, the victim transported to the nearest medical facility, and a diving physician consulted. Oxygen breathing at atmospheric pressure must not be considered as a substitute for hyperbaric treatment in cases of decompression sickness and air embolism.

The provision of an adequate First Aid Kit is essential for all diving operations. The requirements of such a kit will differ with different diving operations. Medical advice should be sought in advance, when working in remote locations or unfamiliar environments. Oxygen resuscitation equipment should be carried and divers trained to use it.

6.3.4. Emergency situation procedures

General discussions on the statistics of, and causes of diving accidents can be found in Appendix 2. All members of the diving team should be well enough briefed so that they can take independent action.

In an emergency, when there is a threat of loss of life, serious physical harm or grave environmental damage, a scientific diver may, at their own discretion, violate these and any future regulations. Divers who do so must notify the Diving Officer as quickly as possible. A written report of such instances shall be submitted to the Diving Control Board, explaining the circumstances and justifications for the actions taken.

6.3.4.1. Emergency diving equipment on research vessels

Oceanographic research vessels frequently have trained divers on board or scientists who are trained to dive, even when the cruise project in hand does not require diving. On all oceanographic operations there is the risk that cables or equipment may foul the ship's propeller, or that expensive equipment may become tangled underwater. On such occasions it is useful to have diving equipment available that can be used in emergencies.

Diving equipment, which has been put on board a research vessel for use in emergencies, is under the direct control of the Captain. The Diving Officer shall provide a set of regulations stating under what conditions the equipment can be used, and what qualifications of divers must be on board before the equipment can be released. If the equipment has to be used, a report must be submitted to the Diving Officer, written jointly by the Captain and the senior diver involved in the operation.

6.3.4.2. Action during an emergency situation

If the emergency arises underwater, the buddy diver must render assistance. All divers should be trained in buddy breathing and should practice the technique underwater. The buddy diver should assist the diver to the surface, on the surface and to the boat, and afterward as instructed by the senior diver present.

Proceed with assistance to the injured person, e.g. first aid, artificial respiration, warming up, etc.

Recall all divers or swimmers to the boat or shore. If decompression would normally be required, balance the risk of abbreviated decompression, and the possible requirement for recompression later, against the immediate risks.

Contact doctor, coastguards, helicopter (6.3.5), home base, passing vessel or the nearest compression chamber as appropriate, using radio if possible.

Make sure that other members of the diving team are not at risk and that, in the haste of the emergency, no equipment has been left.

Proceed as fast as possible to the nearest port, hospital or compression chamber as dictated by the circumstances and the casualty's condition.

Note down immediately the details of the casualty's dive during which they were injured. Conditions of emergency often lead to neglect of completing the diving log, and make it impossible afterwards to work out how long the diver was in the water, or how much decompression the diver should have had. While this record may contribute only slightly to successful treatment of the injured person at the time, in the long term it is essential to the understanding of diving accidents and their avoidance. Isolate and keep under lock and key every item of the injured diver's equipment for later analysis.

Particularly if recompression is required, try to ensure that all recent dive record sheets or log books are available for the doctors, as this may assist treatment. The details of the diver's last medical examination may also be useful if it can be obtained quickly.

If the accident is fatal, or seems likely to result in a fatality, notify the Director of your establishment or Head of University Department as soon as possible. This person will notify the next-of-kin. In the event of a fatality, the doctor involved, or your Director, will notify the statutory legal authorities.

When the immediate emergency is passed, and all necessary steps have been taken to assist the casualty, a full record of the incident should be compiled. Depending on the exact sequence of events, the Dive Marshal/Dive Master may have time, e.g. while the boat is heading for shore, to start making notes, obtaining details from other divers, noting exact times, etc.

Remember that the buddy of a diver who develops symptoms of decompression sickness, even on a dive apparently carried out according to the tables, may also develop symptoms later and require recompression.

6.3.4.3. Reporting procedures

The amount of detail required in, and the circulation of, the report depends on the seriousness of the incident. The procedures given here are the minimum which should be carried out in the various circumstances.

Accidents resulting in no permanent injury. Such accidents include large flesh wounds, broken bones, concussion, decompression sickness and other injuries which would prohibit the diver from normal work or diving for a period. The accident should be reported in full to the Diving Officer, who will decide whether there is any evidence of negligence or unsafe diving practice. Before recommencing diving, the injured diver should have a full medical examination.

Accidents resulting in permanent injury or inability to dive. The fullest possible report should be compiled by the Dive Marshal/Dive Supervisor/Person-in-charge and submitted to the Diving Officer. This should be submitted, with the Diving Officer's comments and recommendations, to the Director of the establishment or Head of Department, or Diving Control Board.

Periodic medical examinations of the injured diver should be made to establish progress and rate of recovery. A diving physiology research laboratory or other experts concerned with diving medicine should be consulted.

Depending on the seriousness of the disability, and the circumstances of the accident, the injured person may have a claim for damages against the employer, or the organizers of the dive. To establish this claim, and the liability or otherwise of the employer or dive organizer, a full enquiry, with legal advice may have to be carried out.

Accidents resulting in fatality. The Director of the establishment Diving Control Board, or Head of Department, must be informed at once. The normal civil legal enquiry into cause of death will be conducted as a matter of course, but it is almost certain that there will be a fuller enquiry afterwards to establish the circumstances of the accident in the interests of improving diving safety, or the settlement of claims for damages, etc. The fullest possible report must be compiled. Expert medical opinion must be obtained.

Specimen accident report forms are given in Appendix 6.

General instructions for dealing with accidents are:

1. Keep calm and reassure patient.

2. Keep patient on oxygen and incline head downward, left side down during transportation.

3. Ensure paramedics/physician understands about the effects of gas and cardio-vascular interaction if they have not dealt with decompression sickness.

4. Do not stop giving oxygen to a diving accident patient even if patient is breathing normally unless there is a need to reopen the airway, or the patient shows signs of oxygen convulsions (without pure oxygen, bubbles will combine with nitrogen and aggravate symptoms).

5. Keep patient out of hot sun and watch for shock and protect patient from environmental factors.

6. Do not give pain killing drugs.

7. A complete history of all events leading up to the accident and evacuation must be forwarded with the patient.

8. Depth gauges, tanks, regulators and other diving equipment should be forwarded with the patient and should be properly tagged, or at least set aside without tampering, especially if the accident was fatal.

9. Be aware that a well-trained diver may be the most knowledgeable person on the scene regarding diving accidents and must, therefore, make a continuing effort to insure that proper treatment is given.

6.3.5. Evacuation by helicopter or aircraft

Each evacuation by helicopter presents unique problems. Knowing what to expect and the procedures to follow will save time, effort and perhaps a life, as well as not further endangering the victim or the crew of the helicopter. Aircraft evacuation is subject to the same general instructions, especially with regard to maximum recommended altitudes.

1. Request a helicopter with a medic crew and oxygen.

2. Try to establish communications with the helicopter. If your radio does not have the necessary frequency try to find another radio. Mark position of the victim by use of smoke flare on sighting the helicopter as there may be other boats and divers in the vicinity.

3. If pick-up is from a boat, maintain a speed of 10 to 15 knots into wind about 20 degrees on port bow. Put all antennas down, if possible without losing communications. Secure all loose objects on or around the decks because of the strong downdraft generated by the helicopter. Do not secure the line trailing from the helicopter, basket or any cable from the aircraft to the boat. Always let the lifting device or cable touch the boat before handling it to prevent electric shock.

4. Make sure the patient is ready in advance of the transfer, because time is critical both to the victim and the hovering aircraft.

5. Signal the helicopter pilot when all is ready, using hand signals by day and flashlights at night.

6. Place life jacket on patient.

7. Tie patient in basket, face up.

8. Attach personal information such as name, address, age, what happened, and what medication has been administered, if any.

9. Ensure that flight crews know that is is imperative to fly or pressurize aircraft below 220m to prevent intensification of decompression sickness. Oxygen administration to victim should continue.

10. Provided aircraft can handle the extra weight, the diving buddy should also be transported with the patient, because they also may require recompression and can provide information, comfort and contact with the patient's relatives and friends.

6.3.6. Radio procedures

In different countries there are different official attitudes toward the possession of transceiver radios. In North America and Australia, for instance, radios are freely available to citizens and are widely used; some other countries also practice relatively free use. Other countries such as Ireland require licences and in some cases a written or practical examination in radio procedures and use, but even in countries which officially require a licence, enforcement varies and official policy changes from time to time. In other countries possession of radio equipment by a citizen is severely restricted and may even be held to be a criminal act.

Radio procedures vary in practice from country to country but generally some broad principles apply:

1. Know at what times emergency channels are being monitored, and the frequencies of these channels. If possible know where the monitoring stations are and what the range of your radio equipment is.

2. Stay on the air broadcasting for the shortest possible time, this conserves your batteries (broadcasting uses more energy than receiving) and gives others time to talk to you. Also other people may wish to use the frequency for a message of even greater urgency.

3. Use a call sign. Identify yourself first at the beginning of each transmission statement. Include your position in this statement in even a general context.

4. Do not panic and signify a greater urgency over the radio than the situation permits; there are three international call signs signifying different levels of urgency that will allow those coming to your aid to implement an appropriate response. These are paraphrased from international radio procedure instructions and should be repeated in groups of three:

a. PAN-PAN-PAN. Stay on this frequency. I will have a message that concerns safety but there is no immediate urgency.

b. SECURITÉ-SECURITÉ-SECURITÉ. Stay on this freqency and keep the channel clear. I have a message that involves safety and there is some urgency.

c. MAYDAY-MAYDAY-MAYDAY. This is an all-purpose distress call for immediate aid. Persons and craft or vessels in imminent danger. Emergency is of a life-threatening nature. With lights or other signaling, SOS-SOS-SOS conveys the same message.

Practice radio procedures using available manuals for pilots or the literature that is often supplied with the radio. Practice especially the saying of numbers and the Alfa, Bravo, Charlie, etc. phonetic alphabet, which is used locally. These vary from language to language. The international language for air traffic control and for pilots is English and most radio traffic is conducted in English.

SECTION 7. DIVING SYSTEMS OTHER THAN SELF-CONTAINED AIR

7.1. Introduction

For reasons of prolonged endurance, compactness, absence of bubbles and/or noise, it is sometimes necessary to use diving equipment other than scuba containing compressed air. Because of cost and complexity, these methods have not been widely used in the past. These alternate gas mixtures and supply systems are now increasingly being utilized by underwater scientists, particularly in saturation and habitat diving.

Use of non-scuba equipment usually requires specialized training not available to scientific divers except through commercial or Navy schools. In different countries there are various Navy manuals and codes of practice which cover the use of the equipment.

7.2. Scuba, mixed gas, surface demand, and other systems

This section summarises very briefly the characteristics of the various non-scuba systems using different gas breathing mixtures. The technical requirements as regards training, safety precautions, etc., for each type of equipment are listed in later sections, as shown in brackets:

Surface demand, air (7.3): Very long endurance, relatively cheap, limited horizontal range, excellent communications, low breathing resistance.

Surface demand, mixed gas (7.3): Very long enduranoe, limited horizontal range, excellent communications, low breathing resistance, reduced decompression times.

Underwater habitats (7.4): Endurance of days or weeks, excursion dives without decompression, advantages of saturation, very expensive, requires substantial permanent surface support teams.

Lock-out submersibles (7.5): Long horizontal range, depth range to about 100 meters or more, advantages of umbilical diving with communications, option of different gas mixtures, very expensive, requiring support ship and technical back-up.

Oxygen closed-circuit (7.6): Small light sets, low acoustic noise, very low breathing resistance, long endurance, absolute depth limit of 8 meters.

Oxy-helium bell diving (7.7): Depth range greater than 100 meters, in-water duration of hours, voice communications, limited horizontal range, very expensive, requires extensive support ship or platform, and massive technical back-up.

Mixed-gas scuba (7.8): Prolonged endurance, reduced decompression, reduced maximum depth, good horizontal range, moderately expensive, specialist training of personnel needed.

Only a few scientific establishments have experimented with these systems outside the Navy and commercial sectors. Alan Hulburt and Frank Chapman, Undersea Research Program, (NOAA) NUR, 601 South College Road, Wilmington, South Carolina 28403 would be good contacts for any group planning to develop diving based on these specialized breathing systems.

A problem with all mixed gas systems is that cylinders may be filled, but not properly labelled or documented, and a subsequent user may not know what gas mixture is in the cylinder. Extreme discipline and control is needed in this respect. A diver could be extremely seriously injured or killed by diving with the wrong mixture, and making the wrong assumptions about maximum depth or bottom time. The safest rule to apply is that if any diving cylinder is found to be unlabelled, and the gas mixture and date of filling is not recorded, then the cylinder should be emptied.

When scientific diving is being conducted with self-contained equipment other than open-circuit scuba on compressed air, work-up dives should be conducted as recommended in Table 4.1. The time lapse from the last working dive should be calculated from the last dive carried out using the same type of equipment.

When a working scientist is using self-contained equipment other than open-circuit compressed air scuba, it may be convenient to have the standby diver or buddy diver on compressed air scuba. However, there must always be at least one other trained diver on the surface who has experience of the specialized equipment that is in use.

7.3. Surface demand air and mixed gas

Surface supply diving applies to diving operations where divers are supplied with breathing gasses by an umbilical from the surface.

A surface supply demand regulator should be supplied by an air or gas bank on the surface which has adequate reserve for the work in hand including decompression; or from a compressor via a gas storage unit having adequate reserve to bring the diver to the surface with time for decompression in event of failure of the compressor. Compressors shall be operated by a competent attendant who, if circumstances permit, may also be the diver's tender. The attendant is responsible for the operating of the breathing mixture supply system. The Surface attendant on the gas hose should be a diver fully trained and experienced with the surface demand equipment. Each diver in the water shall be tended by a separate diver's tender.

The diver should be equipped with a reserve cylinder which can be turned on easily, or which automatically turns on, in the event of interruption of the surface supply. The reserve should preferably be adequate for surfacing including decompression. Where surface supplied equipment has not been designed to be used with a bail-out system, the diver shall wear an open circuit scuba aparatus complete with an available regulator..

Each air line supplying air to a diver should be fitted with a pressure gauge downstream of the supply valve and installed so that the surface attendant can read it easily. The lower end of the hose should be attached to the diver's harness so that drag on the hose is not transmitted directly to the demand valve or mouthpiece. There must be a non-return valve at or near the demand regulator so that gas from the reserve cylinder does not vent in the case of failure of the hose, and low pressure in the hose cannot be transmitted to the diver.

A standby diver also with surface supply should be ready to enter the water. The standby system should also have voice communication, and a longer umbilical than the working set. Two divers in the water can act as standby for each other.

In conditions of strong current a life-line should be used. It may be inadvisable to use surface demand equipment when working amongst mooring ropes or other lines to the surface or in kelp beds and in high currents.

Whenever possible an integrated communication system should be used, or a telephone wire should be run in conjuction with the hose or life-line; one of the main advantages of a tied diver is that clear, telephone communication with the surface is possible (Bevin, 1985; Walker, 1986, p.258).

7.4. Underwater Habitats

Underwater habitats are artificial environments placed on the seabed or held at a fixed depth which are pressurized usually to near the ambient pressure of their depth. They contain living and working space and allow divers to remain underwater for extended periods of time. They allow diving excursions to be made longer than permitted by the standard air decompression tables that are designed for divers descending from, and returning to the water surface.

7.4.1. Introduction

Current underwater habitats are being designed to meet the requirements of a broad range of diving scientists. By incorporating saturation diving techniques with these work platforms, researchers have the capability of living and working for extended periods of time within the environment they are studying. This allows for the design of observation schemes and experiments which are otherwise not feasible when diving from the surface (Hydrolab Manual, 1984; Miller, 1979; Miller & Koblick, 1984)

7.4.2. Saturation diving

The term "saturation" as used in diving refers to the body's tissues and their capacity for absorbing inert gas at a given depth. When the tissues have absorbed all that they can at a given depth, they are said to be

saturated and the amount of decompression necessary to rid the body of this inert gas will not increase with continued time at that saturation depth.

7.4.3. Safety considerations on saturation

The primary safety consideration for saturated divers is that the habitat rather than the surface is their refuge in the event of a diving emergency.

7.4.4. General procedures

While each habitat program has specific procedures unique to that system and program, divers in saturation must always:

1. Recognize that they are dependent upon the surface personnel for support.

2. Familiarize themselves with the saturation system, its operation and emergency procedures.

3. Be knowledgeable about fire safety.

4. Understand the diving equipment and its proper use.

5. Be familiar with the study area and any navigational aids available.

6. Understand procedures and limits for excursions from saturation depth.

7. Plan missions and excursions that are compatible with safety guidelines, equipment, depth, excursion limits and the abilities of the divers involved.

8. Assume responsibility for their own safety as well as their buddy's.

7.4.5. Emergency procedures

Complete emergency procedures are developed for each habitat system and must be understood by surface personnel as well as saturated divers. Potential emergency situations may include the following:

1. Fire
2. Loss of power
3. Loss of communications
4. Habitat flooding
5. Habitat atmosphere becoming contaminated
6. Accidental surfacing of a saturated diver
7. Diver out of air
8. Injured diver
9. Lost diver
10. Decompression sickness after excursion
11. Loss of primary breathing gas source to habitat.

7.4.6. Health care

Throughout the history of habitat programs, the most common health problems have included ear infections, skin rashes, inflamed sores and diarrhoea. By following a strict regime of completely drying one's ears after every dive, washing thoroughly daily with soap and water and periodically washing out wet suits, these maladies can be reduced or eliminated. In addition to the above, heat loss is of concern to the saturated diver. By wearing properly fitting thermal protection outside the habitat and warm dry clothing inside, heat loss can be minimized. Full medical precautions are most effectively described in proprietory commercial saturation diving manuals.

7.4.7. Hazardous materials

To reduce the possibility of fire, atmospheric contamination or health problems to the inhabitants, certain groups of materials must be excluded from the hyperbaric atmosphere of the habitat: 1. Flammables; 2. Volatile materials; 3. Volatile poisons; 4. Mood-altering drugs; 5. Medications whose effect may be altered by pressure; 6. Heavy metals or their salts.

7.4.8. Excursion diving

A saturated diver must adhere strictly to vertical excursion limits outlined for a particular habitat diving program. There is a danger of developing decompression sickness both in the water by an ascent shallower than the habitat, or on returning to the habitat after a descent deeper than the habitat.

7.4.9. Decompression after saturation (Also see Section 11)

Decompression procedures after a saturation dive vary with different systems. Factors determining the decompression procedures include: 1. Depth of saturation; 2. gas mixture used; 3. Depth and duration of last excursion prior to decompression. 4. Time elapsed since last excursion. Depending on the habitat system used, divers may be decompressed inside the habitat, either on the bottom or at the surface; brought to the surface in a pressure vessel, mated to a surface chamber and decompressed; or swim from the habitat to the surface and immediately enter a surface chamber and be recompressed to saturation depth and begin decompressing.

7.5. Lock-out submersible

A lock-out submersible is a vehicle that allows divers to be kept at variable pressures on the surface and on descent and ascent while allowing them to dive directly from it following "lock-out" after reaching depth.

Some scientific uses for lock-out diving are for exacting, manipulative experiments, sampling microhabitats not accessible to a manipulator and collecting fragile and delicate organisms. The lock-out submersible may be used for long excursions from undersea habitats, while maintaining the diver at constant pressure; also it may be used by the habitat diver for travel to and from greater depths, allowing for safe, dry decompression before returning to the habitat (Youngbluth, 1983; 1984).

7.5.1. Design principles and applications

The lock-out submersible has, in addition to the 1-atmosphere chamber, a separate chamber capable of pressurization which permits a diver to exit the submersible at depth (Busby 1976, 1981; Haux, 1982). Divers may be transported to the study site at surface pressure or at storage depth from saturation. The dive chamber is then pressurized to a slightly greater pressure than that of the ambient depth, thus allowing the dive hatch to be opened.

The benefits of lock-out diving include greater safety and comfort for the diver, and immediate decompression following return to the submersible. Also the submersible pilot is usually able to control the gas supplies and decompression, thus avoiding misjudgements by the diver owing to the effects of narcosis. Some lock-out submersibles are capable of mating with a surface, double-lock, decompression chamber which allows food and medical supplies to be passed to the divers.

7.5.2. Operational procedures

Divers must complete training prior to lock-out for familiarization with dive gear to be used and with operating procedures for compression and decompression of the submersible's dive chamber. A shallow water lock-out dive should be made prior to deep or mixed gas dives. Current velocity, direction and bottom obstacles must be assessed before diving. Precautions must be taken to prevent pinching of the gas supply hose in case the submersible shifts from current or surge during the dive.

Equipment - The following gear must be used:

1. Umbilical consisting of a non-kinking primary gas supply hose, and a communications wire linking diver, tender and pilot.

2. If scuba is necessary, then a neutrally or positively buoyant safety line must be tended by the dive tender.

3. Bail-out emergency bottle with either air or mixed gas, depending on the composition of the primary supply gas.

4. Heavy-duty nylon web harness with lifting "D" ring.

5. Firm attachment for umbilical to diver's harness.

6. Lifting device capable of recovery of unconscious diver into dive chamber shall be rigged and ready.

7. Weight belts must not have quick release buckles.

8. Flotation vests must <u>never</u> be worn, especially those vests with CO^2 emergency cartridges.

Pressurization: Air or nitrox is recommended for dives less than 50 meters and helium-oxygen gas mixture for dives deeper than 50 meters. The dive tender should control pressurization rate to allow immediate attention in the case of equalization difficulties.

Decompression: In planning total bottom time for a dive, adequate time must be allowed to return to the submersible, to retrieve the umbilical and to secure the dive hatch. The pilot or tender should control decompression. Oral-nasal masks must be available with oxygen supply.

7.6. Oxygen closed-circuit

Oxygen diving must only be carried out after personnel have received a full course of instruction from a Navy establishment or other establishment experienced with this mainly military equipment. Diving must be conducted in strict accordance with whatever rules apply to the particular equipment and usually full consultation must be made with the manufacturer to arrange for suitable training.

Normal rules concerning diving pairs and stand-by divers apply; it may be an advantage to have the stand-by diver equipped with scuba rather than oxygen equipment. No oxygen diving should take place unless at least one experienced diver fully trained in oxygen equipment remains on the surface during diving.

Gas must be medically pure oxygen and special care must be taken to ensure that all pipes, seals and taps are free of oil and grease.

Flow-rates must be checked at the start of the project, and weekly thereafter. Working diving on oxygen should not be carried out deeper than 8 meters.

Divers who normally work with compressed air should, when preparing for work involving oxygen diving, carry out work-up dives according to a recognized schedule.

7.7. Oxy-helium and bell diving

Variable amounts of oxygen and helium are supplied to the diver as a breathing mixture in order to reduce narcosis, avoid oxygen poisoning, reduce gas density, and shorten the time of inert gas flushing during decompression. Much of this diving is done from bells.

7.7.1. General principles

To increase capability of safely diving to depths greater than the limit for air diving operations (8.2.21) and avoid nitrogen narcosis, oxygen-helium diving techniques must be used.

Two basic categories of diving can be identified:

1. **Intervention diving for short exposure to a maximum depth of about 100m.**

Intervention diving can be carried out by experienced scientific teams without an extensive logistical and equipment support. Surface supplied diving techniques are recommended, while free diving using closed, semi-closed or open circuits, and particularly scuba diving with bottles filled with oxy-helium mixtures, is discouraged and is considered excessively dangerous. Decompression sickness caused by helium gas is more likely than air to attack the nervous system and cause permanent disability. With an umbilical hose and safety line the diver is always tethered and safety is improved by a virtually unlimited gas supply, along with a secure voice communication system. Umbilical facilities may be changed to oxygen or nitrox supply for decompression on ascent.

2. **Saturation diving for deeper depths and/or extended bottom time missions.**

Saturation diving requires a pressurized bell and a complete diving system: civil research establishments rarely can manage these high cost and bulky equipment sets and so, usually, saturation bell diving is carried out in conjunction with commercial companies or with the Navy (Orzech & Trent 1985; Keith 1978; Colantoni, 1983).

7.7.2. Guidance for operations

Oxy-helium diving is technically and physiologically more complex than normal scuba diving and any diver approaching oxy-helium must first be fully qualified and trained in air diving operations. If semi-closed equipment is to be used, special training is required.

1. Fullest discussion with the Naval, commercial, or Government authorities must be held before considering this method of work and personnel and equipment must be selected carefully.

2. All personnel shall attend a suitable course on the equipment to be used, including training in a decompression chamber on the mixtures to be used, and pool and sea practice dives.

3. Decompression must include stages breathing oxygen, nitrox or air.

4. Only approved decompression tables must be used for the dives (Appendix 3).

5. Diving must never be carried out without an on-site compression chamber, with transfer-under-pressure facilities. It must be operated by a fully trained operator.

6. Divers should be equipped with a full-face mask or helmet. An emergency cylinder and suitable thermal protection should be worn.

7. A tender on the surface should handle the umbilical and may maintain the communications, while a fully equipped stand-by diver must be prepared to enter the water immediately for emergency assistance. These attendants should always be divers trained on oxy-helium equipment.

8. A suitably qualified person shall control and time all the procedures, and maintain a complete diving log. He/she should be responsible for the possible use of the decompression chamber.

9. An open bell or stage for recovery of divers during in-water decompression stops is also recommended as well as a heating system, ie., warm water circulation, to compensate for loss of body heat owing to the longer than usual times spent in the water and the thermal transfer properties of helium in the breathing mixture.

7.7.3. Legislative requirements

Oxy-helium diving is controlled by detailed offshore industrial legislation in most countries where it is practiced. Scientists wishing to use these techniques may have to comply with government regulations and conform to commercial practice.

7.8. Oxy-nitrogen, Self-contained mixed-gas, modified air

Conventional scuba equipment can be altered in performance by using oxygen enhanced breathing mixtures, either 40% or 60% oxygen. Any equipment that is used to store or handle pure oxygen must be specially designed for the purpose, and the risk of combustion is such that lubricants and rubber or plastic components must not be employed unless designed for use with oxygen. Under no circumstances should ordinary open-circuit equipment be used with pure oxygen.

The use of an oxygen rich breathing mixture provides greater endurance at a given depth before the diver will require decompression stops during ascent. The tables for calculating the "equivalent air depth" can be found in Navy diving manuals. Since the partial pressure of nitrogen is reduced, the equivalent air depth is shallower than the real depth of the dive, and decompression is also reduced. On the other hand, the higher partial pressure of oxygen means that oxygen poisoning will occur at depths shallower than the maximum depths on pure air, and this depth limit must also be calculated before the dive, and never exceeded.

Although it looks a simple matter to use an oxygen rich mixture in open circuit scuba, because the equipment is so simple, extreme discipline is needed to made sure that divers stay within the safe range of depth, and make the correct calculations for ascents. The technique has been used successfully in some university and institute diving groups, but it is recommended strongly that divers planning to use such a system attend a full training course in oxy-nitrogen mixed gas diving.

Oxy-nitrogen mixed gas can also be used in semi-closed circuit or completely closed circuit systems. The older types of set, usually designed for military use, have a reducing valve that feeds pre-mixed gas at a constant rate into a flexible counter-lung. The diver breathes the gas from the counter-lung, and exhales through a carbon-dioxide absorbent, with the scrubbed gas going back into the counter-lung. In this way the diver breathes each unit of gas several times, and removes more oxygen from the gas than on an open-circuit system. Professional training is mandatory, either at a commercial or military diving center. The equipment requires careful maintenance, and extreme discipline is needed in filling sets, changing carbon-dioxide absorbents and controlling dive profiles.

An oxy-nitrogen mixed gas breathing system gives prolonged endurance for a given weight and volume of equipment, and has a reduced bubble outflow compared with open-circuit scuba. It is also acoustically quieter.

Since 1965 there has been a series of totally closed circuit mixed gas breathing systems. The principle is to use a sensor to measure the partial pressure of oxygen in the breathing circuit, with an electrical output that adjusts the flow of oxygen and inert gas from separate cylinders, so as to keep the breathing mixture within safe limits. The objective is to obtain a very quiet set, with no bubble noise, and very long duration in relation to weight and volume. Some models have been developed for military use, but a number have been marketed for commercial or scientific use (Cross and Hanlon, 1983). Reliability of the gas control system is obviously critical, and in order to obtain this reliability, sets have become complex, expensive, and require very professional maintenance. The performance of military sets of this type is not available, but it is fair to say that no set, which is commercially available, has yet received wide use. Since this type of equipment is still uncommon, very careful training would be required, usually in conjunction with the manufacturer, or a training establishment recommended by the manufacturer.

7.9. Multiple mixture diving, tri-mix

Multiple mixture diving is currently regarded as being outside of the range of breathing mixture supply systems available to scientific divers for use in the course of their work.

SECTION 8. DIVING IN SPECIAL AND EXTREME CONDITIONS

8.1. Introduction

Scientific research diving by its nature must often be carried out in special and sometimes extreme conditions, e.g. fast currents, zero visibility, very cold water, etc., since the scientific requirement controls the location of the diving site. Special conditions can be either largely environmental and naturally occurring, or artificial and dependent on technical or industrial factors.

The recommendations in the following subsections are intended to be supplementary to other established Diving Codes, and to other sections of this Code. In every subsection it is assumed that the divers have been adequately selected and trained on the appropriate equipment, briefed and trained on the conditions to be expected, etc., and that proper support boats, communications and back-up facilities will be provided. As far as possible, each subsection deals with the special problems which can arise in scientific diving and not with the many diving skills and practices that are applicable in most diving situations.

8.2. Environmental situations and extremes

Where a complex working situation arises, such as working in heavy surf, in a remote area, or carrying out deep dives at night, project organizers are recommended to correlate all the relevant sections of this Code, and to prepare a set of orders or regulations for their project, which will usually be based on this Code and normal diving practice. It is important to have accurte knowledge of the conditions which the personnel are likely to encounter, so that adequate safety precautions can be organized in advance.

If two or more conditions referred to here in separate sub-sections are combined, then the combination of the recommendations in each subsection may fall short of providing adequate safety, since danger factors tend to multiply. In some cases the combination of circumstances may require the introduction of new procedures and application may have to be made for exemption from some statutory regulations (see Sections 2 and 12).

When extreme or special environmental conditions prevail, diving operations should be restricted to one operation at a time so that the back-up and support teams can devote their attentions solely to one team of divers. If there must be separate teams diving at the same time, each team must have its own back-up and surface support so far as possible.

8.2.1. High Altitude Diving

Diving at high altitude may be an inevitable consequence of research work in certain regions, e.g. Switzerland, central Turkey, etc. or it may be an aim in itself, with high altitude research dives having recently taken place at altitudes of around 6,000m. Diving at altitude requires careful planning and preparation and should not be undertaken lightly. Factors which need to be considered include.

Area: Generally, the higher that one goes, the more remote is the area. This alone can cause problems with logistics, communications and first aid (e.g. where is the nearest recompression chamber, does one take radios or rely on other communications, etc?). The team must be sufficiently competent in the mountaineering, outdoorsmanship and associated survival skills necessary for the selected area.

Logistics: People, equipment and rations have to be moved to and from the diving site. Depending on the remoteness of the site and the type of terrain, movement can be completed in a few hours by vehicle or in days, and possibly weeks, on foot. In addition to personal equipment, diving cylinders, lead weights and other heavy and bulky diving equipment almost always have to be manhandled substantial distances. It is often worth considering the use of non-divers to help transport the expedition's equipment.

Decompression: Altitude diving can be divided into two sections; low altitude (100m-3,000m) and high altitude (3,001m-6,000m). There are no known diveable bodies of water much above 6,000m.

Table 8-1. Formulae for depth adjustments at altitude.

Low altitude. A simple formula for depth adjustments relevant to decompression for diving at low altitude are provided by the British RNPL tables:

Under 100m	No adjustment
100m-300m	Add ¼ actual depth to obtain table depth
300m-2000m	Add 1/3 actual depth to obtain table depth
2000m-3000m	Add ½ actual depth to obtain table depth

This table refers to divers who have previously had at least 16 hours acclimatization at altitude. Other altidude dive formulae are provided by the Swiss tables, and by the Canadian DCIEM tables, 1984.

High altitude. No decompression tables seem to exist for diving above 3,000m. Hennessey (1977), however, recommends the following conversion formula:

$$\text{Depth (tables)} = \frac{2 \times \text{DEPTH (actual)}}{(\text{Barometric Pressure} + 1)}$$

Note that Barometric Pressure must be expressed in bars.

Only no-stop dives should be undertaken as air decompression schedules on stops introduce an unknown but certainly even greater risk. Specialist advice often may be obtained from diving federations or military agencies in countries that carry out high altitude diving.

Aclimatization: Whenever possible, aclimatization should be carried out for low altitude dives. For dives at high altitudes, aclimatization must always be undertaken. The most sensible approach is a gradual rate of ascent to the diving altitude with sufficient rest periods at intermediate altitudes. A useful rule is: climb high, sleep low. Apart from any aclimatization necessary for climbing, 24 hours should be spent at the dive site altitude before diving.

Altitude sickness: This is a real problem above 4,000m, although it has been known to occur as low as 2,450m. Altitude sickness is preventable by proper aclimatization. All divers on high altitude dives should be familiar with the symptoms and treatment of altitude sickness (Hackett, 1980). It has killed.

Breathing gases: Seek expert guidance on the use of compressed air and other breathing gases at high altitude. A recent expedition (1984) successfully used pure oxygen during no-stop dives at about 6,000m. However, very little is known about this subject. Whichever gas is used, do not fully charge the diving cylinders at sea level. Allow for expansion of the gas with decreasing atmospheric pressure.

Ice: Be prepared for ice diving (8.2.2) as ice is often encountered at high altitudes. Preparation means both taking the equipment for cutting through the ice (from hammers to augers and even chainsaws) and, more importantly, prior training in the techniques of under-ice diving.

In general: Sunburn occurs very easily at altitude. Use a good sun lotion and keep the back of the neck covered; a sunburnt neck is not pleasant beneath a rubber neck seal. Neoprene contains bubbles that expand at altitude and this can make a suit unwieldy. Bag-rubber dry suits may be better for altitude diving. Cameras and housings for underwater use are designed to resist external, not internal, pressure. Ensure that ambient pressure can be maintained during ascent to the dive site (e.g. remove the lens from the Nikonos before ascending).

8.2.2. Polar environments and under ice

Diving has been routinely used on polar scientific expeditions over the past three decades (Fane, 1959; Peckham, 1964; Ray and Lavallee, 1964; Rigler, 1972; MacInnis, 1974; Welch and Kalff, 1975; Horner and Schrader, 1982; Fallis, 1982; Watanabe et al., 1982; Mel'nikov, 1984; Welch et al., 1987), and papers concerned with the detailed methodology for working in this environment are available (Bright, 1972; MacInnis, 1972; Anderson, 1974; Jenkins, 1976; Rey, 1985).

This chapter briefly reviews the essentials of polar cap operations and promotes diving as a safe, effective extension for polar cap aquatic research.

Pre-expedition Considerations: Physically and mentally fit, well equipped divers operating with simple, well planned diving practices, maximize the safety and effectiveness of polar operations. Expeditions to

either polar region involve rapid transition and novice polar cap divers can be shocked by the light changes, the cold and the seclusion.

Operational remoteness cannot be stressed too strongly and the diving logistics of an operation, such as equipment maintenance and repair as well as the ability to deal with medical problems, must be entirely self-contained within the expedition. As part of expedition preparation, emergency contingencies should be reviewed, first aid equipment inventoried and replenished and oxygen supplies secured. On-site medical personnel should be contacted, emergency procedures reviewed, and evacuation routes to hyperbaric facilities identified and tested.

Pre-expedition training is strongly recommended. Rutkowski and Ruszala (1980) and Somers (1986) have outlined basic training strategies that can be extended to include equipment and method testing. Program directors should insist that project leaders participate in these exercises so that personal limitations can be identified and dealt with. Frequently, a macho "we've done it before, it works no time now, don't worry about it" attitude prevails and over enthusiastic novices can be lured beyond the capability of their training by "seasoned" divers.

In addition, most polar projects involve short term intense periods of activity and the "part-time" diving scientist must be gently reminded that limits and skills decrease with age and with inactive life-styles. Prior to an expedition, each diver must complete a comprehensive diving medical conducted by a physician who understands the rigors of diving. Pulmonary function tests are suggested for all and an active ECG for those 40 years or older provides an excellent cardiac assessment, promotes fitness awareness, and provides a training incentive.

On-Site: The success of polar diving operations depends to a large extent on proper selection and use of equipment. Cold is an ever present factor and divers and surface tenders must be able to recognize the signs and symptoms of hypothermia in themselves and others (8.2.3.). Warm, windproof staging areas not only greatly enhance comfort and promote effectiveness but if they are mechanized (tracked vehicles, aircraft or ships), they also provide valuable pre- and post-diver logistical support. During the dive, tenders are especially susceptible to cold, and waterproof insulated mitts and boots must be provided. Frostbite on the face should be watched for and sun glasses should be worn if tenders spend long periods in direct bright sunlight. Post-dive strategies for divers generally involve donning additional outer garments over the dry suit unless under garments are uncomfortably wet. Moderate exercise promotes rewarming as does the comfort of a heated shelter. Fire risk and carbon monoxide poisoning should always be considered whenever a fueled heater is used.

Variable volume foamed neoprene dry suits and thin fabric suits, when combined with underwear, provide excellent thermal protection. The thin fabric, or "bag" dry suits are less bulky, require less weight and are more comfortable to wear both under water and on the surface. The key to thermal protection is in the selection of appropriate insulating undergarments. Synthetic polyester pile, polyester foam, thinsulate, polypropelene and wool are available. Because the fabric suits offer little or no thermal protection, extra undergarments are required.

Hands remain the most difficult area to keep warm and until recently, wet neoprene mittens with snug fitting wrist seals were most common. Now several manufacturers provide wrist ring snaps for attaching dry gloves or mittens directly to the suit. Dry hands greatly improve manual dexterity and comfort and allow longer dive times.

Dry suit hoods are most commonly attached and extra wet suit hoods are frequently used. Air 'double' hoods are available from certain manufacturers and closed foam bonnets can be used under latex hoods. Neoprene face protectors that cover the diver's forehead, chin and lips have been used but they can limit access to the mouth and are not suggested. In recent years light weight surface supply helmets have gained in popularity because wire communications and the extra thermal dry head protection greatly enhances under-ice effectiveness. Scuba, however, is still most commonly used. There are arguments both for and against the use of full face masks.

Both single and double hose regulators are used in polar operations and Bright (1981) compares their performance during an Arctic expedition. Under extreme conditions regulator freeze-up remains a problem that can be minimized by keeping regulators warm prior to diving. If the diver does not breath through the regulator until submerged and then does so in a slow, even manner, free flow situations can be controlled. To further control free flow, very dry breathing air should be provided. Because dry air will dehydrate the diver, fluid intake must be increased so as to prevent decompression sickness.

Double hose U.S. Diver Royal Aqua Master regulators generally have proved to be more reliable than high performance single hose regulators. Dry suit inflator hoses can be attached to the hookah port of the regulator and cylinder pressure can be monitored by using cylinders equipped with submersible pressure gauges attached to the high pressure port of the valve stem. Twin cylinders provide extra air, which enhances safety under ice, and aluminum tanks have proven superior to steel, especially under conditions where restricted base facilities limit washing of equipment. As a safeguard against malfunction, divers can carry a separate pony cylinder with a spare regulator as an emergency come home system. An octopus rig using two separate regulators connected to two take off points on a twin bottle manifold may provide the best safety fall-back for regulator freeze-up.

In addition to scuba and surface supply operations, rebreathers have been used in polar operations. Although cold water decreases sorbant and electronic capabilities, closed circuit systems allow silent, bubbleless, free swimming operations (7.6, 7.8), but maintenance may become prohibitive (Elsey, 1985).

An even further extension of conventional polar diving operations involves the effective interaction of divers and machines. Recently ROV (10.3) and DPV (10.2) systems have been used in polar environments. Although these units now involve considerable expense and operation support, the trend towards light weight and free swim modifications can only enhance their effectiveness.

Surface Support: In general, the more surface support available, the better. This applies to both open water free swim and sub-ice operations. In open water operations surface tenders can help stage and recover divers and provide lookout and recall capabilities. A communication method is especially necessary where divers could be injured by drifting ice or marine mammal encounters (8.2.13).

In sub-ice operations, surface tenders form a critical part of the dive team and are responsible for the overall safety of the dive. In addition to actual dive support, tenders are a welcome addition during dive hole production, a task that can be accomplished by melting, augering or blasting.

During ice diving operations, it is strongly recommended that all divers be connected to the surface by a line. Although divers can have their own rope and tender, a very effective way to deploy scientific teams is to have a safety diver attached to the surface and the work diver attached to the safety diver by about 4 meters (13feet) of rope. This arrangement allows the data collector unrestricted access to the task but allows effective communication between in-water personnel and the surface. Hard wire communications via light weight masks or light weight helmets greatly expands this capability and also significantly enhances data documentation and storage.

Light weight webbing harnesses secured to nylon ropes with two antipdodal, non-locking carabiners provide a very positive, yet easily disconnected attachment method. Although free flow situations commonly occur under ice and dry suit blowups rank a disturbing second in emergency situations, getting lost remains the number one cause of fatality. There is no reason for a tethered diver to become lost under ice but an emergency procedure should be established before the operation begins (See Somers, 1986). While a diver is submerged, the tender controls the safety line and communication is greatly enhanced if the tender is thoroughly familiar with the equipment, procedures and rope signals. Signals (Table 8-1) should be memorized and practiced prior to the dive.

Table 8-2. Rope signals.

	Tender to diver	Diver to Tender
1 Pull	Are you all right?	I am all right!
2 Pulls	Go down!	Give me slack!
3 Pulls	Stand-by to come up!	Take in my slack!
4 Pulls	Come Up!	Haul me up!

The four pull emergency signal demands immediate attention but on retrieval, care must be taken not to snag the diver on the ice or at the hole edge. If two divers are deployed on one rope, the first diver may have to be pulled clear of the hole before the second diver can reach the surface. Surface support is critical in such situations. Marine mammal/diver interactions at the ice hole have been documented and confrontation for breathing privileges, especially in emergency situations, leaves the diver at great disadvantage. In open water visual and/or acoustical watch should be maintained for killer whale, walrus, leopard seal and polar bear. In Arctic situations, rifle-carrying local hunters should be advised of free swimming operations.

8.2.3. Cold Water

Cold is one of the major hazards that affects divers. Physiologically, cold can produce marked cardiac changes that can be life threatening. In the early stages of heat loss, performance is impaired with fingers and then limbs losing dexterity. Judgement and decision making processes are affected, with confusion and slowed response a common problem. Behavior in task performance and problem solving can be impaired to a point of danger to the diver.

Cold will affect divers differently; some divers are less susceptible to cold. There are many conditions that will play a role in cold effects; the major ones are: the duration and depth of the dive, the age and physical state of the diver, the equipment used, the work to be accomplished, water conditions such as current and salinity, and the dive profile. While it is important to concentrate on the immersion factor, it is also crucial to recognize that a major cold stress on the diver is also pre- and post-dive when the diver is possibly exposed to cold air, wind, and spray; all of which are significant chilling elements.

Diving in cold water creates problems for diving that can be grouped in two main categories:

1. The problems associated with keeping the divers warm. The physiological aspects can be divided into two categories: a. subtle hypothermia, and b. gross hypothermia.

2. Winterizing equipment to function in cold water, and choose equipment that performs well in the cold.

1. Keeping Divers Warm

a. Subtle hypothermia: A diver's subjective evaluation of their thermal balance may vary greatly, and if a heat loss takes place slowly over a prolonged period of time, the diver is more likely to misjudge his/her thermal state than a diver who cools rapidly. Especially in a macho atmosphere, divers may tend to supress the feeling of cold, clench their teeth and accept the discomfort. This typically results in a <u>subtle hypothermia</u>. It is, however, important to recognize heat loss as a problem that is potentially dangerous and renders the quality of the work performed as questionable. Feeling cold is by no means mearly a nuisance.

A loss in core temperature of as little as 0.5 to 0.8°C may result in a loss in mental capacity of 10-20% and as much as <u>40%</u> in memory. Muscle strength and dexterity may deteriorate to a similar extent. Loss of strength is a direct safety hazard, while memory loss and mental slowness entails that the scientific value of the diver's performance may be seriously degraded.

A slowly cooling diver may gradually go into a state of stupor while feeling reasonably normal. In addition to the effects of cold is the added effect of nitrogen narcosis. If a hypothermic diver is exposed to pressure that he/she otherwise is normally able to cope with, nitrogen narcosis may significantly add to the cold effect and cause an unanticipated reduction in mental and motor (muscular) performance. While a thermally comfortable diver

tends to respond to nitrogen narcosis with a relaxed attitude, a hypothermic person will often react with anxiety and claustrophobia and may, depending on self control and training, respond with panic.

b. **Gross Hypothermia**: A case of gross hypothermia means a cooling that poses a direct hazard to a person's life by influencing heart rhythm and breathing. If the core temperature drops below about 35°C, cardiac performance becomes erratic. At about 32°C, most persons will be unconscious and will eventually die from cardiac arrest and paralysis of muscles involved in breathing.

c. **Hypothermia: Prevention and Treatment**: In practice, gross hypothermia is a hazard rarely encountered in diving. Subtle hypothermia is, however, an inherent problem to cold water diving.

Cold requires sufficient thermal protection to avoid hypothermia or to reduce it to a minimum. This can be accomplished by using suits that give either passive or active insulation. Passive insulation means that the diver is protected from the cold by an insulating layer that enables him/her to retain enough metabolic heat to keep warm. Active insulation, or rather active heating, means supplying heat from an outer source like an electrically heated garment worn under a dry suit or supplying heated water to a hot water suit.

In water down to a temperature of about 5°C, a thick neoprene wetsuit is sufficient for dives of up to half hour duration. It is crucial that wet suits provide a snug fit in order to avoid water circulation inside. A suit with the hood attached to it and a 'long john' trouser is highly recommended. Mitts are preferred to gloves owing to better thermal protection. Surfacing divers should be supplied with an appropriate facility to doff suits and change after the dive, such as a heated shelter and protection from wind.

When using suits that give only passive insulation, it is recommended to limit exposure times to 30 minutes and to avoid diving deeper than 30 meters in cold waters. Since heat balance depends on the diver's own heat production to sustain thermal balance, lack of activity means faster cooling.

In water below 5°C, a dry suit is called for unless the dive is very short and unless a heated enclosure is available at the dive site. Depending on the suit material, more or less insulation will be worn beneath it. Be sure to wear enough weights to be able to descend with sufficient underwear on, taking into account the compression of air and underclothes within the suit with increasing depth. Neutral buoyancy should be maintained by balancing input air on descent with air exhausted at the suits' bleed valve on ascent. A dry suit diver will normally require from 12 to 20 Kg of weights when dressed for cold water diving. A full face mask may be considered as it greatly reduces heat loss from the face/head. For long dives passive insulation may not be sufficient and electrically heated underwear may be necessary.

For extreme exposures, a hot water suit is considered by many to be the best choice. If possible, a system supplying heated, and preferably moistened breathing gas should be used. Heated breathing gas brings heat to the body core where it is most needed and corrects an inherent physiological

problem of the hot water suit. Since sensation of heat mainly relies on skin temperature, a diver having warm water flushing through the suit will often feel comfortable despite loosing great amounts of heat through breathing. The diver may then shut down the hot water flow or report overheating while core temperature is actually dropping. Diving with hot water suits is strictly surface supplied diving and requires an experienced diving team and topside facilities.

Stage decompression should be avoided in cold water since the diver, passively suspended in icy water, may become excessively cold. Severe peripheral vasoconstriction, that is, constriction of blood vessels close to the skin, will slow nitrogen elimination and render the decompression stop ineffective. If stops are required, the decompression time should be lengthened in very cold water. Generally diving tables should be used conservatively when conducting cold water dives.

If repetitive dives are conducted, it must be appreciated that it takes a considerable time to recover heat balance totally. A practical sign that rewarming is completed, is the initiation of sweating. Do not trust subjective evaluations of being comfortable since the sensation of heat relies more on skin than on core temperature. Heat supplied from an outside source rather than being generated in the body will produce a false perception of being warm again. Normal heat balance may only be obtained after several hours, or an over-night rest.

Rewarming of the patient should be prompt but carefully conducted either by placing the subject on a cot or bed with plenty of dry blankets or by immersion in warm water <u>not to exceed 40°C.</u> Rough handling of a hypothermic person poses the hazard of causing more stress than the heart can take and ultimately can cause death by cardiac fibrillation and arrest. Complications may also arise when cold blood from the extremities starts rushing back to the core during the rewarming process, causing the core temperature to drop even more before it starts rising again. Apply more heat/insulation to the torso/head than to the extremities during the initial rewarming to counter this effect. If the patient has stopped breathing, CPR may be necessary.

2. The technical aspects of winterizing equipment

Every regulator will be susceptible to freezing when used at temperatures below about 4°C. Moisture in the breathing gas condenses and forms ice crystals that cause the regulator to jam. Whether a regulator is likely to freeze depends on the ambient temperatures and on the following:

a. Flow of gas produced per unit time.

b. Relative pressure drop of the gas between the various stages from the time it leaves the cylinder until it escapes from the demand valve (second stage).

c. Diameter and shape of the various passageways inside the regulator.

d. Moisture of the breathing gas.

The higher the cylinder pressure, the greater the pressure drop, the higher the rate of flow, the more narrow the routes of escape and the more moisture in the air, the higher is the risk of freezing. Pressure drop causes cooling of the breathing gas below the ambient temperature, however, and a regulator may actually freeze up even if the air/water temperature is above 0°C.

In practice, a freeze-up problem normally starts before entering the water when divers test their regulators in a sub-zero environment. If the air is very cold, ice crystals will form instantly inside the regulator and act as sites for further ice formation during the dive. Water is, of course, always above, or at worst, at the point of freezing of fresh or salt water, and if breathing from the regulator is postponed until under water, the high heat conductance of water will normally keep the regulator above freezing. It is highly recommended not to commence breathing from the regulator nor to purge it before totally submerged when diving in freezing or near-freezing temperatures.

Since rate of gas flow is crucial to determining whether the regulator will freeze, a slow, careful breathing pattern should be adopted. Divers with a high air consumption are more susceptible to having their regulators freeze than divers with a low consumption. Free-flowing must be avoided since it is likely to cause instant irreversible freezing.

When freezing is likely, cylinders should be filled with as dry an air as possible. Special dehydrating agents in the final filter cartridge might be employed.

If the first stage of the regulator has pressure transducer ports that communicate directly with the water, an anti-freezing cap should be used. This protective cap is filled with an antifreeze such as glycol alcohol that prevents freezing of the pressure ports. Many modern regulators have silicon filled pressure transducers that are not prone to freezing. This feature involving the use of an environmental cap does not protect against freezing inside the second stage of the regulator.

A full face mask has the inherent problem that a diver will necessarily commence breathing before entering the water and thereby run the risk of initiating a freeze-up problem. It is good practice to avoid prolonged periods of breathing from the mask on land and it should therefore be the last piece of equipment put in position before the diver enters the water.

8.2.4. Mid-ocean (Blue water diving)

This sub-section deals with diving in water whose depth substantially exceeds the depth of the dive, or where visibility is substantially reduced on a dive not approaching the bottom. Diving in the open ocean must be done from a large ship, which is necessary to transport the diving party to the dive site, with a small dive boat tending the divers in the water.

The most important operational procedure is that no mid-ocean diving operation should ever be carried out without a small manned boat of easy access (preferably an inflatable boat) located on the dive site and fastened to a vertical shot line of greater length than the planned dive depth (6.2.7). The shot-line can be stabilized against vertical heave by being attached to a damper disc or plastic bucket at the bottom, or a weight not to exceed 2 kilograms. Drift of the dive boat may be minimized by using a sea anchor. This boat should be self-propelled (only a light outboard is necessary because of the proximity of the ship) and it should be equipped with a suitable diving first-aid kit and oxygen. Under no circumstances should the ship and the dive boat ever be out of communication, and preferably, sight. The position of the boat should be maintained using the ship's radar.

The primary concerns for a group of divers involved in tasks requiring close concentration are orientation and communication. Even very clear water is extremely disorienting without a sea floor for reference and extra precautions must be taken to avoid directional confusion or separation. Without a point of reference in the water, divers may accidentally descend deeper than planned; there is also the problem of vertigo that may be induced by the lack of a reference point. These problems are exacerbated if in addition the diver's line of sight visibility is hindered by special equipment or poor water clarity.

The methods for rigging lines for blue water diving are complex and should not be attempted without consulting the original references. It is strongly recommended that laboratories planning to use these methods make direct contact with divers already experienced in the method. For safety and operational efficiency all divers should be attached to light tether lines fair-leaded through clips to a 60 gram weight. These clips are connected to a central ring fixed to the vertical down line. This system allows the teather to be kept taut between the diver and the central ring (Fig. 8.1).

In operations requiring more than two divers, one experienced diver should be designated safety diver and should devote the entire dive to monitoring position, air supply and status of the other divers. The safety diver should be positioned at the central dive line and be in reach of the ring holding the tethers for the other divers. Should the need arise the safety diver will be able to attract the attention of any diver by pulling on the tether. The safety diver should also be tethered, but on a one to two meter line with a quick-release snap-clip or carabino (Heine, 1985).

The tether lines are needed for communication and because it is extremely easy in very clear deep water to unintentionally attain a depth in excess of that planned. The tethers serve primarily as a reminder to the divers that they have reached a previously agreed-upon depth and define the

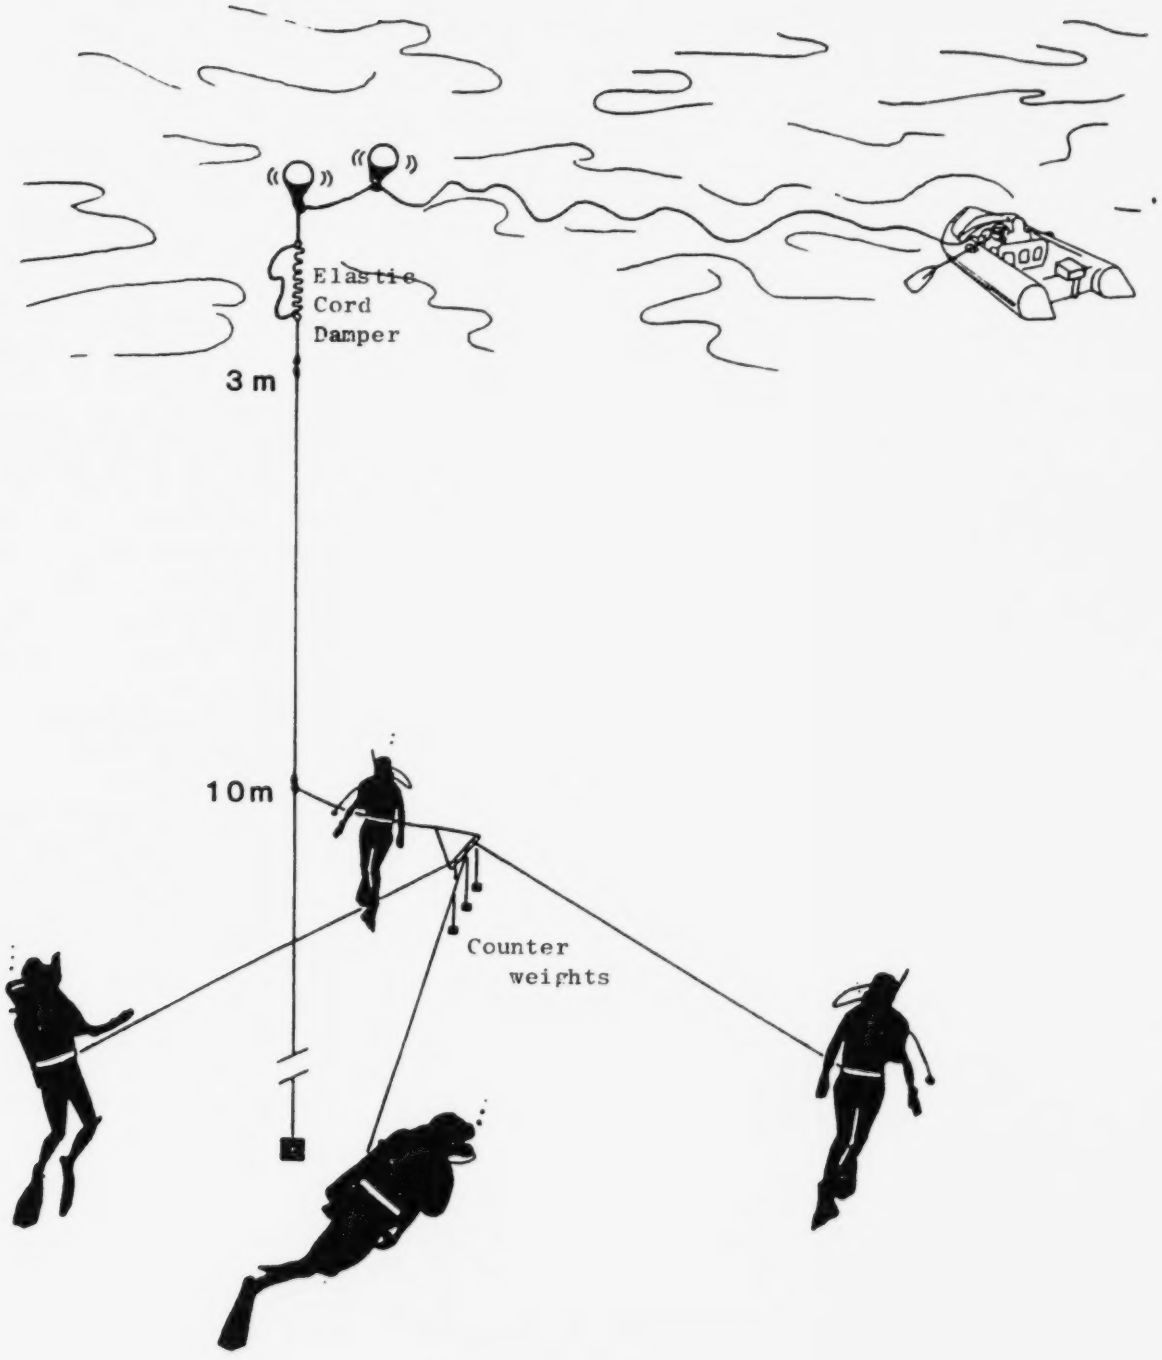

Figure 3.1 Surface boat with operator, down line array, safety diver and three working divers conducting a blue water dive. Adapted from Hamner (1975).

horizontal limit from the down line. Teathers should never be attached to the diver's weightbelt. At no time should a diver ever unclip from the tether and separate from the group (this especially includes the collection of specimens that always seem to lie just beyond reach).

In the event that a shark or other large marine animal such as a marlin, sailfish, or swordfish should appear in the dive area it may be prudent to terminate the dive prematurely and exit the water. If, in the judgement of the safety diver or any diver in the diving team an ascent is desired, the divers should unclip, hold the tether in the hand, and move toward the down line. At the center they should form a circle, release their tethers, and move slowly toward the surface. This allows someone to always have observation of the intruding animal(s). Shark billies should be carried if sharks are expected to be encountered.

Even when a recompression facility is available on the ship, decompression diving should be minimized. If in-water decompression is contemplated, note should be taken of the strong vertical shear that often exists in the water at decompression levels, which tends to force divers apart; buddy lines to the shot line are essential.

8.2.5. Oceanic coral atolls

The primary hazards that divers normally consider within coral atolls are of a biological nature and involve corals, sharks, stinging and venemous species (8.2.13). There are also physical dangers of abrasion of boat and body against the coral caused by sudden and often unpredictable currents in passes and in the submarine drainage system of the irregularly disposed coral heads. Currents can be induced by tidal movements that are almost imperceptible in open water, and by sudden storms which can pond surface water across the atoll, driving submarine counter-currents. In certain configurations of atolls, currents in passes connecting the atoll lagoon with the open ocean are liable to be hazardous and notices to mariners and any available hydrodynamic information should be consulted before planning dives.

Divers can find themselves held against coral or beneath a water-cut overhang by current or waves. There are extreme differences between sea-state in the sheltered waters of an atoll lagoon and the surrounding open ocean. When approaching the fringing reef from the inside of the lagoon, sudden and violent surf action can be encountered. Sea-state in passes directly open to the ocean may be high, even if well into the lagoon; small boat transits across these passes may be hazardous.

Fresh water will often be found in the upper part of the water column in an enclosed atoll after a period of rainy but not necessarily windy or stormy weather (much of the rain on an atoll is adiabatic and is caused by local weather systems which are driven by heated air rising directly above the atoll and forming rain clouds when cooled off at altitude, rather than frontal system storms). The fresh water will cause haloclines with poor visibility in the turbid water at the interface and there may also be thermoclines. Water movement below a water interface is often quite different than above and if a diver penetrates into a body of water moving

more rapidly, he/she should ascend so as to not be swept away from the other divers.

8.2.6. Coral reefs and fringing reefs

Most coral and fringing reefs are situated in equatorial areas that are remote from major population centres and the usual support services. Locally, however, these reefs of interest are near small ports and sometimes, diving services. Medical treatment may not be readily to hand. Even the closest reefs to Townsville, the largest population centre in proximity to Australia's Great Barrier Reef (8.2.15), are beyond the permitted operational range of local rescue helicopters, but many of the Red Sea, Carribean and South Pacific reefs have local access.

It is important to minimize and prevent infections and/or tropical ulcers. Treat all cuts promptly no matter how small or apparently insignificant they appear. Some folk wisdom suggests a course of vitamins, especially vitamin C for a period of time (10 days) before diving to strengthen the body's immune system. Heat rashes and fungal outbreaks may be troublesome and should be treated promptly.

Divers should be familiar with the appearance and habits of dangerous animals, which can be encountered on and around coral reef systems. Treatment can be very specific (Edmonds, 1975).

As part of dive planning from shore, small boat or large boat, access to a reef system, entry and exit conditions need to be considered (6.2.5.; 6.2.6.; 9.2). In areas of high tidal range, the changed tidal level between entry and exit time must be taken into account; divers can find themselves with a very long and difficult walk over jagged live reef at low tide. During the course of a dive visual contact should be maintained between divers as the use of tethering ropes in the coral environment is not always practicable.

The seaward face of a coral atoll or a barrier or fringing reef contains all of the hazards attached to diving around coral elsewhere, but in addition there are several hazards particularly associated with this environment. The primary danger is that of very rough seas suddenly rising up at the reef edge where an often eroding margin gives way suddenly to a vertical drop. This is because the face of a reef is characteristically steep; plunging away to great depths from the shallow coral reef bank. This steep slope, which is often undercut as a result of local changes of sea-level, acts as a wall to the movement of water and even without much wind, breakers can suddenly form on the reef margin with the impingement of swells that can otherwise be undetected on the open sea surface. If divers are down on the reef face, they can become involved in the underwater surge of water associated with the disruption of sea swell at the reef face in addition to becoming suddenly enmeshed in rough seas on surfacing at the pick-up boat. Divers must be prepared to swim to seaward, possibly underwater (while towing a buoy for the boat to follow) in order to find calmer water for pick-up.

Most incidents around reefs involve cuts and abrasions from the extremely sharp surfaces of the growing coral; edges of shell can be as sharp as a knife. Dead coral is not as sharp or abrasive.

A secondary hazard is that in the deeper water off the reef face, shark are commonly found; attracted by the same often rough water that is responsible for disturbing the coral at the margin of the reef and providing abundant food supplies (8.2.12).

Note that many coral and fringing reefs are given a level of statutory protection by governments. This may take the form of protecting corals or other specific groups of organisms, requiring general permits for scientific collecting or research, imposing certain bag limits or prohibitions of certain collecting methods, or the entire area may be contained within a marine park over which a range of rules and regulations apply. Ascertain, as part of the dive planning, the nature of any restrictions or permit requirements and ensure that these have been fully complied with.

It should also be remembered that because of the generally good water clarity around reefs, visual techniques can often be used rather than those relying on actual collection of specimens. For example, visual census techniques have been developed for a variety of fish (Anon, 1979a; 1979b; Reese, 1981; Craik, 1982), crown-of-thorns starfish and their feeding scars (Done et al., 1982) and coral and other invertebrates (Stoddart and Johannes, 1978).

8.2.7. Surf and rough seas

The surf and nearshore zone is the most dynamic and one of the most extensive and common marine environments encountered by divers. It is an area where waves and tides expend much of their energy; where most littoral sediment transport occurs; where problems such as coastal erosion and accretion have their roots; where macro- and meiofauna are becoming increasingly recognized for their role in marine ecology. It is also the most readily accessible and best known part of the ocean as well as one of man's favoured areas for recreation. For these reasons and many others, a thorough knowledge of this zone is required to manage the increasing pressures place upon it.

Surf type: Identify what type of surf zone is likely to be encountered; particularly the wave and tide conditions expected. There are three basic surf zone types.

1. Reflective beach and surf zones are formed by long low waves and/or very coarse sediment. They have steep plunging breakers in a narrow but powerful breaker zone. Careful timing and quick movement between wave sets is required for entry and exit. The nearshore zone extends close to the beach/breaker zone and dive boats can safely anchor close inshore.

2. Intermediate surf zones (moderate energy) are characterized by rips and transverse to shore parallel sand bars. For entry to outer surf zones use rips, for inner surf zones use bars or rips. For exit use bars or zones

of breaking waves, but not rips. The nearshore zone extends to the outer bar. During low waves the dive boats can be placed in longshore trough or rips with caution. The divers must check the overall pattern and swash of bigger waves sets before entering the surf zone in boats, keeping to 'calm' trough water with the boat's bow always into waves while using the engine to manoeuver sideways and backwards by expert use of the engine. Move the boat swiftly when crossing bars.

3. Dissipative surf zones (high energy and fine sand with wide breaker zones) tend to have vertically segregated flow. For entry and seaward travel it is best to use the seaward pulsing (30-90 seconds) bed flow. For exit and return to the shore use surface wave bores. The wave breaker zone is usually wide (100m plus) and highly transitory. Be very cautious when approaching from seaward as the larger sets of waves break 10's to 100's of meters further seaward than the main breaker zone.

General Hazards - be prepared for: 1. Low to zero visibility, especially as breakers and wave bores pass over. 2. Bidirectional wave oscillations, especially seaward of break point. 3. Unidirectional longshore, rip feeder and rip currents which usually pulse at 30-90 second intervals. Use these currents to your advantage, do not try to swim against them. 4. Swim out close to the seabed avoiding surface turbulence and shoreward flows; to return, surface and allow wave bores to wash you ashore (avoid rips).

Equipment deployment: When deploying experimental equipment in the surf zone place a surface piercing ship antenna on top that will break the water surface to permit location from shore; buoy and weight appropriately. Attach a weighted line from equipment to shore or boat. The weighted line can be used to relocate by following along the seabed. To recover equipment, divers can hold equipment off the bed or float it to the surface while others use the line to pull it ashore or onboard.

Scuba equipment: 1. Keep equipment hydrodynamic. 2. Minimize extraneous gear such as cameras, note boards, etc. 3. Secure all gear as tightly as possible, both personally and in boats. 4. Overweight at least 3kg to stay on the seabed: because of the shallowness in surf zone (generally <5m) divers can use their buoyancy vests to surface readily. 5. Be prepared to have your face mask knocked of or down (often), hold on when necessary. Regulator is rarely pulled out of the mouth; fins commonly are pulled off, but usually only one at a time. Divers might consider lashing their gear to life jacket straps for security; tying to weight belt is not a good idea as the weight belt must be ditched quickly if the diver starts to get into difficulties. Loss of weight belts is a common event in surf zone diving. 6. Because of low visibility and turbulence, diving buddies must be very competent and physically quite fit to keep in contact and carry out their research.

Nearshore - above wave base: 1. Make sure that the dive boat is safely located (see Surf type), especially outside intermediate and dissipative breaker zone. 2. Because of low visibility and strong currents, tie off all equipment lowered overboard; also there should be a line to divers either from the boat or a buoy. Boat should trail a boat safety line and buoy. 3. Be prepared for wave orbital motions at bed with to and fro

Photo 4 : Divers launching a dive boat in heavy surf. The boat has been rushed through the breakers, and the divers jump on board as the engine is started. When beaching this kind of boat it can be driven rapidly straight onto the sand. (Photo, Kleinberg).

horizontal movement of up to 5m and plumes of suspended sediment. It is best to go with orbital currents rather than fight as they return you close to where you started. If the diver has to remain in place, overweight and hold on to the seabed (dig in knife) or base of equipment (avoid the top of equipment as the diver may pull it over or break it, especially cables). 4. If working, wait for lulls in between wave pulses to do work, then lie low during pulses. 5. Plan the dive and dive the plan but be prepared for contingencies. 6. In nearshore repetitive diving start deep and work into shallow water.

Limits: There is a limit to scientific work in the surf zone and nearshore. A general rule is when you have little or no control over your direction of movement, then it is time to get out. This can occur under relatively low waves on some reflective and intermediate beaches especially in the rip channels. Examine the surf carefully and if necessary swim out in snorkel gear to check currents before attempting scuba. Finally the divers must be competent surf swimmers who know how to use waves before attempting surf scuba. The waves and currents are there to be used for offshore, along shore and onshore transport; plan your dive to use the current patterns and never try to fight against them. If in difficulty the diver should surface immediately and always approach the shore on the surface.

8.2.9. Fast currents

Conditions of rapid water flow are extreme for divers when the water is moving at a greater rate than a diver can comfortably make way swimming; commonly one knot. The greatest danger diving in rapidly moving water involves being swept offshore or along shore into hazardous shore areas, especially if there is no boat cover. Becoming separated from a boat while diving further offshore is not quite as dangerous as the diver can usually be found in open water, especially if flares and flourescent patches are carried. Water movements on the surface may be very different in direction than deeper and bottom water. Surface water currents are usually greater than those on the bottom and without a surface buoy to indicate the divers position, separation is almost inevitable. Tracking the diver by watching for bubbles from a boat on a choppy day during a deep dive must not be relied upon.

Diving in currents should usually be done while the buoyed divers are covered by a manoeuvering boat. Diving down an anchor line, which is occasionally necessary to procure specific specimens, puts the divers in very high drag situations and physical strength and endurance is important.

Each diver should be as hydrodynamic as possible so as to be least affected by water drag. Masks should be low volume and the snorkel should be held in knife strap and bootee or inserted across the crotch strap as the current drag on snorkels can pull off a mask. Short, broad fins are more managable than long speed swimming fins and strap-fins are better than shoe-fins as they can be more easily refitted and secured. Instruments should be low profile and snag resistant as the diver is often swept into weed and ropes. Back-pack bottles increase water drag, are difficult to get off and on rapidly and are particularly liable to foul as they are held away from the

body. Bottles held tightly to the body are inherently better in a current, and these bottles, without a back pack, also stack and can be secured more easily and safely in small boats in rough water.

It is advisable to use ropes and shot lines on all dives in fast moving water. In its simplest configuration, the fast-water rope set consists of two lines (6.2.7.).

1. A shot (also known as a down or main) line, is the line connected to a buoy at the surface and an appropriate weight or anchor at the bottom. In very rapidly moving water that will drag down even a large surface buoy, only enough weight to keep the bottom of the line dragging on the bottom should be used. This avoids the diver being exposed to uncomfortable or dangerous drag while ascending the line and possibly making stops. Moving with the water rather than fighting it is inherently safer. This line should be only up to about 50% longer than the water depth, and the more vertical it can be kept, the better, although length depends entirely on the size of the buoy and current speed. Divers should descend by hooking an arm over the line, facing into current and by tilting the body downward allow the current to hydrofoil the diver down the line. To ascend the diver faces into current, hooks an arm over the line and finning or with buoyant assist, tilts upward and allows current to drive him up the line.

2. A sweep line, which is deployed by the divers after reaching the bottom is for horizontal travel from the base of the shot line. This line is usually about 10m long and allows the divers some freedom of movement in a radius around the bottom of the shot line. The shot position can be changed underwater by the divers to provide for greater area coverage; divers may swim the shot line weight and drift with current to get to a more suitable location. Of the diving team, the buddy should always be further out the sweep line than the 'scientist'. The scientist usually is in charge of determining the sampling or observational position and the rope-diver assists. The buddy, who is usually not as totally preoccupied with the science, is primarily responsible for the dive safety.

8.2.9. Night diving

Diving at night is becoming increasingly an operational requirement in scientific diving. To divers coming into night diving from a background of sport diving, this may cause some concern, though it may be a comfort to know that almost 50% of all commercial diving operations are carried out at night and these incur few problems for the diver.

Pre-dive: Lighting. Adequate light should be available for the surface team to work by. When using hand torches (flashlights), avoid shining them around as it upsets night vision. Surface cover. Ensure a fully working surface cover boat. Markers. Where possible (and certainly in complex jobs) jackstays, marker panels and guides (6.2.7.) should be rigged up to aid the diver. In less complicated tasks, a simple shot or mainline leading directly to the job will often suffice. Briefing. The diving team should be thoroughly briefed on the task, including routes to and from the job, leaving and entering diving platforms and safety procedures. Briefing

is more important than on day dives as the dive team members must be able to anticipate the actions of other divers without being able to observe them.

On-dive: Safety. Whether to use the buddy system or a lifeline will depend on the circumstances. A lifeline can often be the better system for scientific diving at night. It gives the diver a psychological boost and, more importantly, gives him a line of communication with topside. In the event of difficulties, it gives the stand-by diver a direct route to the diver. Light. Many divers are surprised the first time that they dive at night at the amount of available light that exists underwater. The moon and stars are the main source of this light and, once the diver has obtained night vision, visibility can be quite good with no artificial light. This, of course, assumes little water turbidity. Despite the possibility of good underwater vision, each diver must still carry at least one torch. Good quality, lightweight underwater torches/flashlights are now available. An excellent emergency light is the chemical 'Cyalume' or 'cool lite' lightstick. They work equally well underwater and topside and are unaffected by pressure at least to 50m depth.

Post-dive: Safety. Locating and recovering a diver at night is not always easy. Extra care should be taken, especially if decompression is involved. Thought should be given to rehearsing diver recovery procedures during daylight. Clothing. Heavy-duty windproofs should be available for divers leaving the water to keep the chill away and allow them to continue participating in the scientific aspects of the project.

8.2.10. Kelp and other seaweed

Kelp is a collective term for a number of species of macro algae which form large underwater three-dimensional systems similar to forests. The distribution is world-wide in cold to temperate seas (0-16°C), in a depth range of 0-130m. It often occurs in a high energy environment where it has the effect of attenuating wave action. As a result of this sheltering effect and also being a primary producer of high output, it harbours a complex community of organisms which could not exist without it. Many scientific projects involving underwater physical and chemical oceanography and ecology have been conducted in this environment in the past and more will continue in the future.

Guidelines: 1. The shelter afforded by many kelp beds from sea and swell may be used to advantage in launching diving boats or for divers to gain access to the sea on an otherwise exposed coast. 2. Certain species of kelp, such as Ecklonia maxima produce a dense canopy at the surface. When diving at low tide the canopy tends to pack tightly making penetration difficult. This can be a danger, particularly to the novice, when diving with snorkel only. Windows usually occur in canopy cover. These may move or open and close with passing swells. This must be taken into account when planning a return to the surface. Forcing a way through the canopy should be avoided as invariably mask and snorkel end up round the diver's neck. Novices to kelp diving should be adequately briefed before entering the sea. Diving at high tide is usually easier. 3. A knife worn on the outside of a leg is liable to snag on kelp plants, resulting in entanglement or loss. The

knife should preferably be worn on the inside of the calf. 4. Buddy lines may be dispensed with because of the problem of entanglement. However, strict discipline in buddy contact should be enforced. Towing a marker float in kelp is usually not possible, although using a shot and sweep lines (6.2.7.) is often possible to get below and operate below the kelp canopy. 5. Kelp may snag the air reserve rod on the air bottle resulting in either a bent rod or premature switching to reserve. This can be avoided by substituting a cord and toggle to activate the air reserve or by training divers to reach up and behind to activate the toggle directly. It is preferable in many cases to use cylinders that are not fitted with the J-valve. 6. Because kelp usually occurs in cold water, hypothermia may become a problem.

8.2.11. Pinnacle and seamount diving

Pinnacles are a world-wide feature found in both coastal and oceanic situations. They are characterized by their relatively small surface or near surface area and steep sides. They include rocks of both sedimentary and igneous origin. They are of particular interest to physical and chemical oceanographers, geologists and biologists. Often their isolated situation provides for interesting community and genetic studies.

1. With steep sides, small upper surface area and often rugged topography, anchoring may be difficult. A shot-line of 13mm diameter synthetic fiber attached to a 25kg anchor weight and buoyed by a float of 50 liters displacement is recommended for mooring a small boat or inflatable carrying divers. Care must be taken that the anchor weight finds bottom and that there is sufficient slack in the line so that the anchor does not drag off the edge of the upper surface.

2. Currents of 50-100cm/second may be encountered. A 50-100m float line (6.2.7.) should be streamed from the shot buoy for a diver to grasp in the event of surfacing away from the shotline. In oceanic situations working from a large research vessel, a diver can be swept from sight in a short space of time (8.2.8, 8.2.15). Often this type of diving involves deep diving where there will be one or more decompression stops. A master compression chamber with trained supervisor in attendance and a medical practitioner specializing in diving emergencies should be available on the research vessel.

3. Ships tend to swing at anchor. If diving takes place from an anchored vessel there should be look-outs placed on either side. Currents further increase the uncertainty of where a diver will surface.

4. Water clarity in the vicinity of sea mounts is usually extremely good. Judgement of depth is therefore deceptive. The shot line should be clearly marked at regular intervals for depth but well calibrated depth gauges should be worn as shot lines are very rarely vertical in the water.

5. Pinnacles, particularly sea mounts in deep water situations, usually attract sharks. If decompression stops are envisaged and sharks are present, a shark cage must be provided for protection at decompression stops.

All divers must receive full training in shark cage use before work dives are undertaken 8.2.12; Appendix 2 .

8.2.12. Sharks

Although attacks by sharks on divers do occur, most sharks do not present a hazard. However, all sharks should be treated with respect. Sharks are found generally in the deep open ocean, but tend to be concentrated where localized shoaling water occurs, such as over sea mounts and ocean ridges and seaward of coral reefs. As it is often these features which divers investigate, the chances of encountering sharks under oceanic conditions are good. In many areas of the world such as Australia and the Pacific islands, however, dangerous sharks do come into shallow water even up to the shore line. Shark in enclosed spaces appear to act similarly to their actions in the open ocean (8.3.13).

1. Divers should operate in pairs. This affords a better opportunity of detecting sharks at a distance before they become a threat as sharks often approach by circling prior to an attack.

2. When the possibility of shark encounter exists, one or both divers should carry either billies or electric shock rods. Not only do they offer a reasonable measure of physical protection, but they also do much to reduce tension in the divers. Provocation of sharks should be avoided as this can be a reason for a shark attack.

3. Fishing in the vicinity of a diving operation should be banned at least for the crew members of the research vessel, and for nearby boats if possible. The collecting of fish for scientific purposes by divers should be avoided in shark infested water. If fish are taken, however, they should be attached to a float and towed some distance away from the divers.

4. The dumping of scraps or rubbish by the research vessel before or during a diving operation, must be avoided.

5. An injured or bleeding diver should leave the water immediately; other divers might also exit the water for a period of time following any blood in the water.

6. If a shark shows more than a passing interest in a diver, the diving operation should be aborted and it is advisable for the divers to return to the boat in as calm a manner as possible.

7. With dives involving decompression stops, either a multi-person, double lock compression chamber must be on hand or a shark cage must be attached to the shot line at the first decompression stop. The cage should be capable of being moved upwards from stage to stage by the divers inside. All divers in the team must be given adequate training in entering, exiting and manoeuvering the shark cage before work dives are undertaken.

8. Many sharks are nocturnal feeders and during feeding are often found in shallower water. Night diving should thus be avoided if possible where there are sharks.

9. If explosives have been used to obtain rock samples, or for any other reason, diving should not take place immediately afterwards in case dead fish attract sharks.

8.2.13. Dangerous marine animals (other than sharks)

Most dangerous marine animals other than sharks occur in tropical water and are often concentrated around reefs. Similar dangerous animals are also found in temperate waters but there they are usually related species that may only inflict painful stings rather than being life-threatening.

Marine life recognition and injury prevention techniques are not discussed here as these are commonly subjects in their own publications or extensive chapters in manuals (Sommers, 1972; Appendix 2). The standard international reference for dangerous marine species is Halstead (1976). The objective of this sub-section is to briefly describe the general injuries that can occur, and to warn about certain species. Injuries that can occur to divers include:

1. Stings: Most animals that inflict injury by sting are Coelenterates which include hydroids, fire coral, Portuguese Man-of-War, jellyfish, box-jellyfish or sea wasp, some common corals and anemones. Stings are administered through many stinging cells of the tentacles. Symptoms range from mild discomfort to a stinging sensation and a throbbing pain that may render the victim unconcious. Death can result in severe cases from respiratory and cardiac arrest. In the case of fixed stinging animals, the diver must be wary in his/her approach to rock or coral surfaces and remember that the stinging cells can be brushed off onto the wet suit, equipment or samples and are still capable of stinging long after the encounter with the host animal. In the case of free-swimming forms, such as jellyfish, divers should keep their attention focused up current as these animals drift with the current. During an ascent when stinging jellyfish and other animals are likely to be encountered, at least one of the divers should turn in the water while looking upward and watching for the dangling tentacles. Care should also be taken to examine the shot line if it is used by an ungloved hand in the ascent as stinging cells from tentacles could have been deposited on the line by a passing jellyfish. Not all jellyfish sting and it is important that if the diver becomes enmeshed suddenly in a tangle of jellyfish tentacles, as sometimes happens in temperate waters, that they are removed with calm, deliberate actions rather than in a panic which may introduce an accident in its own right, or accelerate any potential irritation from stinging cells by causing more to come into contact with the diver. Some sponges will also produce skin irritation and in some cases, symptoms similar to non-fatal jellyfish stings.

Venomous Puncture Wounds: These may be inflicted by sting rays, cat fish, weeverfish, scorpionfish and other kinds of venomous fish. In all cases the diver has to have been stung by touching venomous spines on these

fish to obtain an injury. The pain from venomous fish sting is usually immediate, intense and can be sharp shooting or throbbing. Pain radiates from the affected area. Extreme cases involve unconciousness and possibly cardiac arrest. The only advice that can be given, as most of these fish hide buried in sand or camouflaged on rocky and sediment bottoms, is that the divers must be very careful how they proceed. These fish will not usually attack, except for possibly a short rush toward the diver of less than 1m when the diver comes closer than the fish can tolerate. Slow progress and use of a stick to prod sand and suspicious areas can often expose these fish. When descending, it is good practice to make contact with the bottom fin first and to use the fins to prod the bottom.

Venomous Bites: Venomous sea snakes and the blue-ring octopus are a particular threat to divers in Australian and Indo-Pacific waters. At present, there are not reports of sea snakes in the Carribean or Florida Keys. At least one species of sea snake, however, has been found in the Gulf of California. Octopus bites are very rare and no reports of fatalities from octopus bites are known from the Carribean or Florida Keys.

Sea snake venom is approximately 2-10 times as toxic as that of land snakes. However, they deliver less of it and only about 25% of those bitten by sea snakes show signs of poisoning. There may be no pain or reaction at the site of the bite but symptoms which develop quickly range from an ill feeling or anxiety to muscular stiffness. Late symptoms include shock, weakness, muscle spasms, respiratory difficulties, convulsions and unconciousness. Deaths have been reported. Sea snakes swim quite quickly and can often approach a diver apparently out of inquisitiveness. An approach should not be considered necessarily as an attack. Calm withdrawl from the vicinity of sea snakes is recommended.

Non-Venomous Bites: The moray and conger eels, barracuda, and shark can inflict tearing jagged type lacerations. The shark bite is generally most serious and often requires dramatic first aid procedures to save the victim's life. Relatively minor bites, such as those of the eels and barracuda require first aid procedures for lacerations. Eels generally are found in enclosed spaces and holes and probing these areas is recommended before exploring with a hand or more of the body. Free-swimming fish attacks are often difficult to predict as these fish are known to attack without provocation and exiting from the water is recommended if there are not forms of protections such as shark cages, etc. (8.2.12).

Conclusion: Prevention of injuries is the best policy. Do not handle marine organisms that you are unfamiliar with and do not take chances with those that you know can inflict injury.

8.2.14. Diving near very large animals

Very large animals such as large whales, fish reptiles and seals are rare. Diving with them either by choice or by accident is an even rarer, often once-in-a-lifetime experience for the majority of divers who are in the right place at the right time. Very large animals are potentially dangerous because even if they are not actively aggressive, their sheer bulk, power and

agility can result in accidental injuries and so even the most docile should be treated with caution to ensure that this unique experience isn't a final one for the diver. Remarkable films have been shot by divers working with sharks, dolphins, seals, polar bears, grey whales, hump-back whales, Wright whales, and even briefly with a blue whale. These records provide some visual reference material on behavior and attitudes to divers.

Learn as much as possible about the behavior of the species concerned and plan the dives and support accordingly. Appreciate that behavior can change seasonally and in addition, many species are more aggressive during their breeding season. For example, seals such as fur seals congregate in large coastal colonies to breed. The bulls ferociously defend areas on land in which to hold harems. In these circumstances, it is often possible to swim with hundreds of adults in the sea only to be attacked when leaving the water. Other normally placid seals, such as Weddell Seals, can be more aggressive in the water since they may defend breathing holes against intruders and males drive off competitors near to groups of females during the breeding season. It is therefore important to know something of the characteristics of the species encountered before assuming that experience with related species is adequate to ensure safe procedures.

Very large animals have few natural predators and so they will have little or no apprehension of humans in the water. Indeed they are quite likely to approach divers from curiosity. Remember that even normally docile species can become aggressive when they perceive that they are cornered, if their young are approached or if you infringe their breeding or feeding territories. Chance contacts with very large animals are impractical to plan for and therefore a diving group depends on its former training to react appropriately to the circumstances. Dive supervisors and marshals must appreciate that such events have strong psychological effects and that previously reliable divers can often react in an unpredictable manner. If an accidental meeting occurs, the safest action is to leave the water quickly. Care should be taken to avoid excessive haste because this can provoke a pursuit or attack reaction in active predators such as large sharks and toothed wales.

When deliberately planning to dive with large animals, divers must:

1. Plan the dive, equipment and support in accordance with the animals which are anticipated to be encountered.

2. Plan the dive, equipment and support appropriate for the locality. Remote sites will require more extensive support and planning.

3. Ensure surface craft are of an appropriate type to withstand buffeting and <u>biting</u>!

When diving with large animals, divers should:

1. Treat all large animals with caution. (Also see 8.2.12,13). Take particular precautions with large, active predatory sharks, reptiles, toothed whales, seals and bears.

2. Avoid diving in low visibility water.

3. Take advice from local divers and fishermen.

4. Study the available information about the behavior of the species anticipated.

5. Not feed large fish. They learn to associate divers with food and become aggressive if not fed.

6. Not use aggressive methods to control large animals except as a last resort. If large animals, particularly mammals, learn that divers are aggressive, then this can result in unprovoked attacks.

7. Not encourage play activities. This can also lead to attacks.

8. Avoid diving in enclosed areas such as sluices, fish traps and purse-seines.

When a large animal arrives in the presence of divers unexpectedly, the divers should:

1. Leave the water as soon as possible.

2. Review the potential hazards and only return to the water if safe to do so.

8.2.15. Diving in remote locations and on coasts of difficult access

A remote area is one where the population density and boat traffic is so low that the occupant of a diving boat stranded away from the main base would have no real chance of being picked up or of receiving food or assistance of any kind. Equally the base camp is assumed to be so isolated that in the event of a serious accident it would take days rather than hours to get the injured person to a good hospital.

In remote areas medical, rescue and recompressing facilities are generally absent. The diving program must therefore be conducted in such a way that these services can never be required. All equipment should be kept as simple as possible to reduce problems with breakdowns and maintenance. If complex equipment must be used, the fullest possible spares kit and repair tools should be carried, and a member of the group should be fully qualified in making repairs.

Even when a dive site is not remote in a geographical sense from human habitation, it may have difficult or limited access from the landward side due to cliffs, dune fields, desert, strong currents or wave action. The main concern of a diving supervisor is the ability to deal with an emergency situation involving an injured diver. With difficult or restricted landward access, a diving operation is usually undertaken from the seaward side by boat. Should seaward access be restricted as well, emergency planning must be carried out in advance. Arrangements should be made in advance with

whatever army, coastguard, police or private interests that may be better supported logistically in the area to help get an injured diver to a doctor or hospital.

A member of the team should have specific responsibility to ensure that the boats contain working flares, dye marker, handbearing compass, radio, survival packs, drinking water, and other items determined by the region and logistics. There should always be a stock of food on board. There should be at least two serviceable boats on the working site except when operating very close to base. When a single boat is in operation, a spare engine should be carried (6.2.5). For longer trips two boats should travel in convoy. Radio contact should be maintained between boats and the base camp at predetermined intervals in addition to potential emergency calls. Keep within anchor depth where feasible especially when there is an off-shore wind or tide and carry a sea anchor (6.2.5). When anchoring on reefs remember that a fouled anchor is likely and plan for enough spare diving time to allow a diver to free the anchor. More general recommendations on small boat operations and the use of some boat equipment is given in section 6.2.5.

Local boatmen are usually reliable about local surface conditions. Do not trust them about underwater conditions, unless they are actually divers and then be prepared to consider their suggestions while remembering that their experience probably was gained while carrying out commercial operations. Patiently make inquiries from likely locals when in an area but do not appear to interrogate them as this may make them less than happy about your presence. Members of the party should go out of their way to facilitate local fisher- and watermen in such matters as clearing their propellors. Actions of this sort will be remembered.

Medical supplies should be extensive and of a far more complete inventory than would normally be kept during a project in a non-remote area. At least one member of the team at each dive site should be qualified to use them. The presence of a paramedic or doctor is advisable.

8.2.16. Negative altitude diving, surface below sea level

This section is based on experience and procedures used during research diving in the Dead Sea with a water surface at minus 400m. Tables were not recalculated although checking by using negative figures in Hennessey's calculation (8.2.1) indicate that these <u>a priori</u> procedures might be safe, assuming that the calculation is true for negative values (not proven for negative values). Formulation of air decompression schedules below sea level has not received the same attention that table modification has for diving at high altitudes.

The higher atmospheric pressure at the sea surface as well as the higher density of the water had to be taken into account in the decompression rates. Therefore physical depth below sea surface was ignored from the point of view of assembling a new table or modifying an existing table by interpolation, and the dive and the decompression stations were planned relative to ambient pressures. The tables used for planning the dives were the standard U.S. Navy Decompression Tables. However, all dives were <u>assumed</u>

to be decompression dives requiring at least a 3 minute decompression stop at the pressure equivalent of 2m below "normal" sea surface. Moreover, the selected decompression schedule corresponded to the next deeper and the next longer bottom time beyond that which would have been selected in normal circumstances. As a result, in the course of 48 dives, only one slight mishap, which could as well be ascribed to tension and exhaustion rather than to a decompression incident, was encountered.

A peculiar aspect of negative altitude diving is that travelling home after a dive or a series of dives might involve the same risks as flying after a dive. Travelling to a moderately higher altitude (<1,000m) should probably be postponed at least until an appropriate length of time has passed to wipe out a nitrogen excess for the purposes of repetitive diving (6 hours for USN Tables, other tables differ). Travelling to an altitude greater than 1,000m above the dive site surface should be made with reference to flying after diving (11.5).

Aspects of diving in saline lakes in desert areas, while not common to all diving sites with water surfaces below normal sea level, are common enough to warrent comment here. High ambient air and water temperatures, low humidity, lengthy preparations before a dive, the difficulty and the efforts necessary to move about and enter the water carrying the heavier weights necessary as well as the efforts necessary to swim to the diving point led to large energy expenditures even before the dive began. These factors could induce heat exhaustion, hyperthermia and dehydration as well as breathing difficulties and hyperventilation under water, (8.2.22). These factors in turn can increase the chances of decompression sickness (Section 11). Hence equipment was not put on until the last possible moment, movement was curtailed to a minimum and the divers were requested to drink large quantities of water. Although electronic communication between divers and the surface allowed for greater safety, voice communication was seldom used between divers.

8.2.17. Diving in low and zero visibility

The diver's ability to orientate and navigate correctly is much reduced in low and zero visibility conditions. There is a danger of the diver unknowingly becoming placed in a hazardous situation from which extrication will be difficult without assistance from another diver or the surface. Specimen collecting can also introduce hazards to the diver and his/her assistant; eg. geologists with hammers and biologists with nets or core samplers. The presence of potentially dangerous animals (8.2.13) can also find the diver reaching into a mouth or a venomous appendage.

In addition to the normal stand-by-diver, it is recommended that there should be instantly available a spare, full breathing set for use in the event of a diver becoming fouled and being in danger of exhausting the air supply before he/she can be removed to safety. Lifelines are useful in quiet water or when an unencumbered ascent can be made. The presence of a shot line, sampling gear and currents creates the possibility of a lifeline snaggling. In currents with bad bottom visibility, the divers must descend feet first on the line in the bottom third of the descent. The depth gauge

must be monitored during a low visibility ascent to ensure that the safe rate of ascent is not exceeded. Roping to the surface can be used if conditions allow but many scientific dives are carried out where a fixed line to the surface introduces additional hazards. A sharp knife must be carried on low visibility dives and it should have a sawing tooth upper edge. The knife as well as other hand tools, should be on a lanyard, so that it cannot be lost in the low visibility

Diver held lights usually render an unworkable situation workable and the type of light and the question of whether it should be held or mounted on a helmet or a piece of equipment should be left to the personnel involved. Different solutions will undoubtedly suit different divers, projects and conditions. Spot point lights (8.2.9) are useful in low visibility just as they are at night.

It is strongly recommended that inexperienced personnel be trained in low visibility conditions in advance. Using a face mask blacked or greyed out using translucent plastic on the trainee will closely approximate working conditions while allowing for close supervision under normal daylight diving conditions.

8.2.18. Confined spaces and vertically restricted environments

Horizontal entry under any obstruction that would preclude immediate, direct ascent to the surface may be made in the course of a scientific dive only with the prior approval of the Diving Officer. Such dives require the use of a diver who remains at the point of entry while the scientist and probably his/her assistant proceed into the opening. The submerged safety diver acts as the link between the vertical ascent to the surface and the horizontal operational dive. Short excursions beneath overhangs are not necessarily to be monitored by this point diver but one of the scientific divers should remain farther back toward an open ascent than the other. In all cases, a safety diver should remain on the surface as he/she may have to come to the aid of all three divers. The surface safety diver must be able to bring additional scuba breathing sets to the divers in the case they must extend their dive and must have extra air. Octopus rigs on single cylinders are recommended rather than one cylinder per diver for emergency air. Available compressed air must be available for any possible extension of dive time and decompression. Any dive which involves the use of a second breathing aparatus for a diver must be regarded as an emergency. Long horizontal entries are not recommended and safety must be given priority over scientific objectives. More rigorous standards must be applied to cave and cavern diving (8.2.19).

8.2.19. Cave diving

Diving in underwater caves has, in recent years, developed considerably in both technique and expertise. Underwater caves are entered for reasons of pure exploration and survey, for biological, archaeological and geological research and other scientific studies. Cave diving presents problems not

encountered in open water diving, many of which are not necessarily obvious to a first time cave diver. It is worth noting that several hundred fatalities have occurred in underwater caves in the past decade through the non-use of many of the accepted techniques. Cave diving is an extremely hazardous type of scientific diving owing at least in part to the inability of the untrained diver to percieve and assess the true risks.

Cave diving is a combination of speleology and underwater expertise. Both constituent disciplines affect the equipment and techniques involved.

Before undertaking a diving programme in which cave diving plays a part, contact should be made for specialized training and advice with the relevant national bodies concerned in the home and field nations (eg. Cave Diving Group in the U.K., N.S.S. Cave Diving Section in the U.S.A. etc.).

Owing to the inability to surface easily from an underwater cave, any item of equipment whose direct malfunction could cause a fatality (eg. breathing set, regulator, torch/flashlight) should be duplicated. Octopus regulators are not considered adequate in this respect. A minimum of three torches/flashlights should be carried, each with the burn time of 2 times the estimated dive time.

The diver must always be in contact with a guideline to the surface. This line should be laid and controlled by the diver, using a hand-held line reel. This shall be of sufficient strength to prevent accident or breakage as the situation demands, and shall be as visible as possible (color may depend on the type of water to be dived).

All vital equipment such as knife, contents gauges, torches, etc. should be worn where they are easily accessible; ideally on the upper torso or arms. No equipment should be allowed to hang free, preventing entanglement or visibility-limiting sediment displacement.

The diver must be familiarized thoroughly with any technique to be used in an underwater cave beforehand in open water; ideally in both clear and low visibility.

The use of a standby diver may be relevant in certain situations, but unless this diver is more experienced than the one underwater, and entirely familiar with the system in question, use of the standby diver in an emergency could exacerbate the situation.

If a cave is large enough, and personnel are adequately trained and experienced, dual penetrations can be made. Every member of a team must be well briefed in the dangers of the particular environment to be accessed.

Sediment is generally present in caves and, once stirred, it may take several hours to settle, as it is usually very fine grained. Cave divers should avoid disturbing sediments wherever possible, by fine use of buoyancy control and movement, and should be prepared to cope with the psychological effect of physical enclosure in zero visibility (6.2.15).

Currents in marine caves can be exceptionally strong, rising to over 5 knots. These may suddenly reverse in direction as part of a usually complex

underground water circulation pattern. Changes in movement in marine caves may not be in phase with surface tides. Equipment and dive planning will take into account such variations in the physical conditions in a cave during the course of a dive.

Pockets of air inside caves may be toxic or may contain no Oxygen. Gas may also be present in an explosive mixture. Therefore gas found in enclosed cavities should only be breathed with caution.

Stress is always present in cave diving, in excess of levels experienced in open water diving. This has been a major contributary cause of fatalities. Divers must make every effort to reduce stress levels before and during a cave dive.

No more than one-third of the total air suppply shall be used on the inward dive. A minimum of two-thirds of the air supply shall be conserved for exit and emergency reserve. If decompression is indicated, the reserve 'third' of the air supply should not be regarded as being available for that purpose. Additional scuba systems may be carried and used to extend cave penetration distances or times. As a consequence of long horizontal cave penetrations at moderate depths, cave divers have accumulated a significant experience of safe decompression diving using U.S. Navy Exceptional Exposure Tables (USN Tables, 1986, deep diving/decompression sections).

Deep diving in caves is extremely hazardous and it should be recognized that in an emergency, evacuation to recompression facilities can be exceptionally difficult from a cave environment.

If more than one diver is present in the cave, then each diver must fulfill the conditions outlined in each paragraph of this section.

Cavern diving is different from cave diving in that while it is also diving in a spatially restricted environment, free emergency ascents can be made. Natural daylight, although possibly dim, is available. Many of the procedures relevant to cave diving will apply.

8.2.20. Noxious gas in bottom water.

Noxious gases such as hydrogen sulfide, ammonia and methane commonly occur in anoxic halos to concentrations of fecal matter under fish cages and mussel rafts as well as in areas of sewage settlement. Hydrogen sulfide may be absorbed through the skin, and can difuse into masks through the material. Divers should therefore wear full dry suits, and positive pressure helmets (NOAA Manual, 1975). Caution should be excersized in taking specimens of sediments or water where dissolved noxious gases are suspected as when these degas at atmospheric pressure potentially significant volumes of explosive gas may be exsolved.

8.2.21. Deep diving on air

This section deals with diving on compressed air at depths deeper than 30m. Dives in excess of this depth are inherently more dangerous because of the increased possibility of decompression sickness and the greater time that it will take a diver to reach the surface in the event of an emergency. Incidents at depth are simply farther away from surface support. Normally decompression diving should be kept to a minimum in deep diving and where decompression stops are necessary, they should always be carried out with very conservative manipulation of tables. See Section 11 for effects of varying the dive profile.

In most countries the recommended maximum depth for employed divers diving on air is in the region of 50-60m. Some countries enforce a legal maximum depth on air, which may or may not apply to scientific divers: Britain, 50m or deeper with exemption; France, 60m; South Africa, 60m; U.S.A., 58.5m (190ft). In the U.S.A. the American Academy of Underwater Sciences recommends that divers be certified by progressive experience to depths of 30ft (9.2m), 60ft (18.46m), 100ft (30.8m), 130ft (40m), 150ft (46.1m) and 190ft (58.5m). In Canada, the Canadian Association for Underwater Science recommends that divers be certified in progressive depth increments of 10m with a depth limit at 40m, unless special deep diving training has been provided. The Woods Hole Oceanographic Institution (U.S.A.) and most research organizations in the United States require a limit of 40m unless special authorization has been granted by the Dive Control Board.

Bounce dive to just shallower than 50m, not involving decompression may be made, provided that the divers are fully worked up (4.9). Deep diving must be preceded by recent dives of increasing depth to acclimate the diver's body with the greater pressures encountered. A bounce dive, however, is by definition a short dive which does not allow enough time for poorly vascularized tissues to become saturated with a higher concentration of dissolved nitrogen, and therefore these dives should not be more than 5 minutes bottom time. The divers are advised to to follow a shot line and there should be a fully kitted up stand-by diver with no nitrogen loading. The working divers should be instructed that an emergency situation will be considered to exist if they do not return to the surface within a few minutes of dive plan time. Repeated short dives with short surface intervals should not be carried out.

Bottom time should not be so long as to dictate a decompression time of more than 20 minutes. This time limit should be decreased if conditions are bad, i.e. cold water, heavy swells, strong currents, etc. A planned decompression time of more than 20 minutes involves the dive organizers in complying with stricter regulations concerning on-site compression chambers in some countries. In all cases diving should be carried out so as to avoid extension into the Extreme Exposure Tables.

The support vessel should be capable of transporting divers to the work site in comfort, transporting the dinghy, providing recompression facilities if necessary and carrying shot weights and buoys, ropes and anchors and also have ship to shore radio.

An absolute minimum diving team for deep diving is 4 divers, plus the boatman, stand-by diver, and compression chamber operator if necessary. The stand-by diver should be fully equipped to dive at the working pressure if necessary. He/she should not have undertaken diving so recently that he/she would be liable to decompression stops after a very short duration at depth as this would make it dangerous for the rescue diver to bring an injured diver to the surface.

Where deep diving is taking place it is always safer to have recompression facilities on the support vessel. These facilities should consist of a compression chamber with lock-in and transfer under pressure facilities and a trained operator whose sole responsibility is maintenance and operation of the chamber. This arrangement is often not feasible. See Section 11 for proximity to chambers.

The dive supervisor, dive marshal or expedition/project leader should be thoroughly familiar with the local recompression facilities and inform the appropriate authorities of the diving programme so that they may be more capable of helping should an emergency arise.

Deep diving in remote areas should be carried out using dive plans that keep the divers on the conservative side of the normal decompression tables at all times, unless the support vessel or nearby base is fully equipped to treat decompression cases.

8.2.22. Warm and hot water (Sabkha)

A sabkha environment consists of a tropical bay or lagoon where evaporation greatly exceeds fresh water input. Salinity is usually high, and salts may be precipitating. Water temperatures may be over 40°C. Most of the waters of this environment are in shallow water shelves facing arid or hot deserts and thus the diving is usually in shallow, warm to hot water with weak currents and no dangerous surf. Being close to the surface during diving where an intense sun will be at high angles for most of the day, and being in warmer than normal water, means that the divers have to take precautions to avoid sunburn, sunstroke, dehydration and hyperthermia. Divers can drown even in comfortable shallow water and momentary unconciousness brought on by the special hazards of the environment can lead to drowning.

Divers are advised to wear a light 't'-shirt and to cover the back of their necks from the direct rays of the sun; waterproof sunburn lotion should also be applied liberally, especially to the backs of the legs and arms as in the normal swimming position, these face upward. Divers should drink copious amounts of water as they will be dehydrating while in the water as the body attempts to cool itself by sweating; a process that will not be noticed by the diver in warm to hot water. Hyperthermia, or ill-effects brought on by sustained high body temperature, must be avoided. Symptoms are general weakness, faintness leading to momentary unconciousness, and often a faint muscular trembling accompanying light-headedness. If these symptoms are perceived during the course of a dive in this environment, immediate surfacing and inflation of the life jacket must be carried out by the diver.

Because waters are more saline than normal sea water, irritation of the eyes and nose and throat membranes is likely, but unless exposure is prolonged, no immediate or long-term effects are likely. Care should be taken to wash the divers as well as the diving gear with great care following each dive.

8.2.23. Super saline water

The observations and procedures that will be referred to in this sub-section draw on the experiences of scientific divers in the Dead Sea. Most extreme cases of super saline water are also in similar environments and less extreme cases that may occur in less arid conditions will have some of the negative attributes common to super saline water. The Dead Sea is situated in an arid zone, where air temperatures in the summer can reach as high as 45°C and in the winter do not drop below 10°C, while the temperature of the upper layers of the sea can be as high as 35°C in the summer while not dropping below 18°C in the winter.

The Dead Sea is a basin of net water inflow that acts as an evaporating pan. Salinity can reach as high as 280g/kg and the corresponding density can be as high as 1230 kg/m^3 or about 23% higher than normal sea water. The relative proportions of the chemicals dissolved in the Dead Sea are totally different from their proportions in normal sea water. The Dead Sea waters are rich in calcium, magnesium, potassium and bromine. The high salinity and the dissolved chemicals make the water painful and irritating to the eyes and to the membranes of the nose and throat, so that contact with these organs induces profuse weeping and temporary blindness, breathing is impaired and vomiting may be induced. These waters should not be swallowed, and ingestion of large quantities can be deadly. Moreover, the immersion of open wounds, or even scratches, is extremely painful although not dangerous. In short, for divers, super saline waters are a dangerous, or at least an extremely unpleasant environment.

The high density of super saline water demands the use of about 30kg of additional weight. These weights cannot be worn on a single belt and must be spread around on several belts to evenly distribute the weight. This makes movement difficult and energy-consuming before a dive and also adds significantly to the time and effort spent in dive preparations. Moreover, by increasing the mass of the diver, the additional weight makes swimming under water more difficult, energy-demanding and air-consuming. The corresponding need for even more compensating weight prohibits the use of under-suit exposure clothing on those occasions when it might otherwise add to the diver's comfort.

The high salinity and peculiar chemical composition of the Dead Sea and presumably similar waters demands absolute prevention of the immersion of the face and this necessitates the use of positive pressure full face masks. These masks prevent buddy breathing, do not permit mouth inflation of the buoyancy equalizer, are slightly less convenient for pressure equalization, have sufficient buoyancy of their own to cause some discomfort and cannot be transferred from one diver to another without slight adjustments. Slight adjustments to the ABLJ should be made with a direct feed rather than with

the more difficult to control emergency air bottle; which should be kept for emergencies. Scuba air supply bottles cannot be replaced during the course of a dive as the face mask, second stage and bottle are a single unit. The full face masks and their regulators may be mechanically more complex and therefore more prone to failure than a normal mouth-held regulator. In the super saline saturated environment the divers and all equipment require painstaking cleaning and maintenance after each dive.

8.2.24. Lagoons and estuaries

In both lagoons and estuaries, a common hazard is often bad visibility caused by particulate and rotting plant material in the water. The water is commonly colored and lights often cause the water to turn bright red and brown as the light is filtered through the colored water. Even at depths as shallow as 5m in estuaries on bright, sunny days, the water can become very dark. Total darkness approaching that of a night dive is commonly encountered in these environments below 10m and although lights may somewhat alleviate the problem of visibility, they will not have the effect that they have on a night dive in clear water.

Currents in lagoons are usually slack and the water is often stratified in both salinity and temperature. In estuaries, however, currents are commonly strong, especially in the race or bore of the river. Fast water diving methods (8.2.8) should usually be used when diving in estuaries. In the case of a shore dive in the channel of an estuary, the dive plan should leave time for a submerged return to shore as upon surfacing the divers will usually find themselves caught in faster moving water than they were encountering on the bottom. If they cannot resubmerge to more slowly moving water near the bottom without incurring a decompression situation, they may find themselves swept along rapidly in the river far from where they put in or in the worst case, out to sea. Under no circumstances should the divers in this situation submerge and begin a repetitive, hard working decompression dive when they are likely to exhaust their air swimming against current.

8.2.25. Diving in holiday environments

Scientific diving is commonly done in out of the way places where interference by local people or holidaymakers with diving operations is usually not a problem. Some scientific diving sites, however, involve working from shore areas in which there are people ranging in numbers from a few interested locals to swarming crowds of holidaymakers. Fishing boat traffic and water sports must be taken into consideration as well as shore constraints in dive planning.

Apart from the normal 'hazards' of holiday environments, such as late nights and incautious entertainment, diving in areas where large numbers of families are holidaying introduces some special conditions. Divers must remember that their operations are disturbing the local environment. Extra hazards to divers occur as diving sites are often within sight of large numbers of people with little to do; increased boat traffic over the dive

site and actual visiting of the site by other divers can both slow down the work and be very irritating especially if divers are fatigued. Normal conduct of operations often becomes difficult and extra time should usually be built into operational plans for dealing with non-party members; it is very important for good relations to be maintained with locals and holidaymakers, however, and remaining polite is important. Although it may not be a legal requirement, it is often a good idea to notify the local police or the local water police about dive operations.

Security of diving equipment and samples can be a real problem if public facilities are being used for water access. Although most people are quite honest and not liable to steal equipment, swarms of children are liable to get in the way while having a tendency to pick things up out of curiosity. It is advisable to have all gear, especially the many small items, in bags or boxes so that few opportunities are presented to the curious or the malicious. Theft of diving equipment after the dive, usually when it is drying after post dive washing, is a common problem.

8.2.26. Whirlpools

"Whirlpool" is a common name given to rotating turbulent water masses that are one of the high energy environments in which diving is usually avoided for reasons of safety, but in which interesting physical and biological processes take place.

Freshwater waterfalls, with turbulent water and whirlpools are associated with a number of interesting processes relating to rock erosion and solution, biological processes in the pool below the waterfall, and fish migration up the waterfall. In narrow sea channels, around some headlands, or at the entrance to sea lochs or fjords when tide is running, eddys and whirlpools commonly occur. The rotating water mass, or whirlpool, can be differentiated from a common eddy because in a whirlpool the water tends to make many circuits and rotate rapidly enough to create a force upon bodies caught up, and force them to the outside of the gyre, as well as often pulling them down.

Very little scientific diving has been done in this environment, but work which has been achieved suggests that conditions for diving in whirlpools are not prohibitive, provided that common sense precautions are carefully observed. The obvious risks arise from the diver being thrown against rock outcrops, against the bottom, or getting tangled in ropes or moorings and dragged downwards by the lateral drag on their body. Similarly, the surface cover boat may be in considerable danger, and the boat and diver may be easily separated. While the speed of motion and turbulence may be disorienting, they are not dangerous, provided that the diver does not collide with any solid object.

Diving strategy, therefore, is to leave the boat or shore in calm water, enter the turbulent water as unencumbered as possible, move freely with the rapidly moving water, and then exit into calm water for recovery, possibly by a second boat. Such manoevers should only be attempted by experienced divers, with very good back-up and surface support.

The downwelling plume of turbulence from a small waterfall of a few meters head can be approached safely underwater, or on the surface, with care. If the diver ventures into the most turbulent zone he/she is immediately swept downstream and out of danger. With larger waterfalls the impact of falling water and objects such as trees carried by the water, would be extremely dangerous. There are no records of divers attempting to approach the plume of a large waterfall from below, or to work in this environment, although some projects have been suggested. The greatest danger would exist if there are any currents or gyres, which drag the surface water into the immediate fall zone of the waterfall. This is quite likely, and any waterfall pool should be studied very carefully, and tested with floating objects the size of a human body, before any diver enters the pool. Any work of this kind must be treated as highly experimental, and divers must be advised to use every possible safety precaution and back-up.

Canadian divers have developed very effective techniques for working in white water conditions of rapids, rock pools, and small waterfalls. These techniques could probably be extended to cope with the situation of larger waterfall pools.

8.2.27. Underwater volcanoes and igneous intrusions

Diving in the vicinity of volcanic activity can only be described as extremely hazardous. Obvious dangers include explosive gases, excessively hot water and high turbidity. The only case where scuba divers have directly observed underwater lava flows is Hawaii where in 1970-1973 a number of lava flows entered the sea from a subaerial eruption from the flank of Kilauea Volcano (the Maunaulu vent) on the island of Hawaii (Moore et al. 1973). Because these flows originated subaerially, the lavas had several days' time to degas before entering the sea and they were not nearly as explosive as they would have been in the case of an underwater eruption. Underwater eruption is prohibitively dangerous and is never recommended for diving except in the case of hydrothermal vent activity, which normally is limited to gaseous emissions (black smokers). Actual eruptions underwater are probably best analyzed by remote instrumentation.

In the case of subaerial eruptions which enter the sea, the most dangerous factors to consider are heated water, turbidity and gaseous explosions. Heated water accumulates at the sea surface owing to its low density. The thickness of a heated surface layer will be a function of the amount of lava entering the sea and the degree of mixing at the shoreline. Long shore currents may greatly aid in the dispersal of heated water. Divers should avoid heated surface waters. This can be done by entering the sea outside the area of influence and swimming under the heated plume to active sites (Moore et al 1973; Grigg, 1973). On steep slopes divers should be aware and cautious of avalanching rock and gaseous explosions. This can be done by swimming several meters above the bottom. Observations of such volcanic flows can only be made under conditions when small amounts of lava enter the sea. Decisions concerning the safety of such missions must be made on site. Another factor to consider is turbidity. Directly over underwater lava flows the water is often extremely turbid; too turbid in fact to operate safely. To avoid areas of high turbidity, divers should operate on the

upstream side of active lava flows or possibly at slightly deeper depths. A third factor to avoid is operating surface vessels which have seawater cooled engines in areas of heated plume water. Engines exposed to such conditions may overheat to the point of on-site failure. Divers should wear protective wet or dry suits, which serve as insulation to the heat as well as acting as protection from sharp, freshly fractured lava surfaces.

Divers operating in submersibles at hydrothermal vent sites might also take into consideration these suggestions to divers. The degree to which caution must be taken will depend on local conditions and the nature of the submersible, which can best be judged by on-site observers and divers.

8.2.28. Hot springs (potentially dangerous hot water)

Excessively high temperatures are rarely encountered in diving (8.2.19; 8.2.23; 8.2.24). Hydrothermal springs or hot water vents can nevertheless be found in volcanic areas. Although emitted heat can be very high, it is generally concentrated in a few spots and rapidly dissipates into the surrounding water. Only in closed, small basins with limited water exchange can temperature rise to dangerous levels, while in lakes and the sea, even very close to the vents, temperatures suddenly drop to values of the normal environment. With water vents, gas is often present. Sometimes it rises as bubbles or pressure-driven bubble streams at elevated temperatures. Depending on the amount of gas and the depth, it may form a column rising toward the surface before it dissipates and can be dissolved.

Owing to differences in density, waters of different temperatures are usually easily seen because of the induced clear water turbidity marked by 'trembling' light, but when the vents carry chemicals in solution or in suspensions, they are smoke vents.

A normal diving suit is usually a sufficient protection against hot water, that nevertheless must be approached with care. Real danger of scalding is a very rare situation. Long exposure to warm water can nevertheless cause hyperthermia of divers with consequent dizziness, headaches and difficulty in breathing, which can lead to unconciousness and collapse of a diver. Usually a rest in a cooler place will promote a rapid recovery from incipient hyperthermia and medical assistance is seldom needed. When one has to dive in warm water or near hot springs, physical excercise should be kept to the practical minimum.

8.3. Artificial, experimental and unusual situations

Diving is increasingly being carried out in situations that range from the commercial scientific (fish tanks, shellfish rafts, etc.) to the scientifically bizarre (eg. studying algae growth in nuclear reactor cooling tanks). Although some of the sub-sections here will not apply widely through the diving community, the recommended procedures are derived very largely from the experience of the technically developed countries, and will have increasing application in developing countries.

8.3.1. Fish tanks, cages, farms, shellfish, rafts: Diving in enclosures and other containers

Large containers are being used with ever increasing frequency by scientists and fish farmers. While diving procedures in large dammed impoundments and land-based tanks should take account of the special recommendations for confined spaces (8.2.18), culverts (8.3.3) and inside storage tanks, many enclosures are deployed in open water and require somewhat different practices. This section deals specifically with diving in and around floating enclosures.

Types of Enclosure: Floating enclosures are usually made in three types of material, impermeable sheet plastic (eg: polythene, PVC), close woven material (eg: plankton net, sailcloth) and fishing net. Usually the sheet plastic and close woven material are used for scientific experiments while fishing net is predominantly used for the manufacture of sea cages in aquaculture. Ideally the plastic and close woven enclosures will be relatively rigid fixed volume systems while the net bags are usually loosely constructed.

The basic design of each system is similar, comprising a floatation collar, a container supported by the collar and a mooring system. The floatation varies according to the design but in the larger systems it usually doubles as a service platform. In this case it will be substantial and reasonably stable. Moorings can be independent but frequently several enclosure systems are interlinked by chain or rope to a common anchor.

Diving Procedures: Diving on enclosures is usually associated with deployment, maintenance and dismantling. The particular dangers are entanglement and being trapped between adjacent systems. A sharp knife with a saw-tooth edge must be carried. If convenient the knife should be worn on the forearm or the inside leg. Since enclosure systems are large and often complex pieces of apparatus, it is advisable for divers who are unfamiliar with the system to dive initially with someone who is familiar or, failing this, to be briefed fully on the layout and design before entering the water. Since most enclosures are supported from the surface the diver often has to approach the equipment from below. The diver should be aware that the escape route in an emergency frequently could be to descend before making for the surface.

Photo 5 : Diver working on the supporting wires around the plastic walls of a fish farming cage. (Crown Copyright, Aberdeen Marine Laboratory).

Photo 6 : Diver descending the supporting wires on the outside of a fish enclosure. Note the floating support framework on the surface above the diver. (Crown Copyright, Aberdeen Marine Laboratory).

Diving around enclosures:

1. **Underwater.** The biggest risk while underwater is becoming tangled in the ropes and associated equipment. Netting, especially larger mesh material, can be exceptionally dangerous, particularly when unsupported or otherwise loose. When handling netting underwater extreme care should be taken and the diver should always attempt to face the netting in order to minimize the chance of the material being caught around the demand valve clamp. This is probably the most vulnerable part of the diving equipment and is most inaccessible to the entangled diver. The low pressure hoses of twin hose demand valves can be crimped and the diver's air supply cut off by tangled netting or rope. Single hose valves are not so vulnerable. Where possible it is advisable for one of the team of divers underwater to stand off from the apparatus in order to be readily available to disentangle the buddy diver. Strong scissors could also be carried since they will probably be more effective than a knife for cutting slack netting.

The base of the enclosures often have heavy weights, which serve to tension ropes, etc. The locations of these should be known and care should be taken to avoid cutting them free accidently. When swimming beneath the entire system the diver should make sure that there is plenty of clearance. Ropes held taut by such weights make useful hand holds for the diver and can be used in controlled ascent and descent.

With shifting wind, current and often large numbers of fish in net cages, irregular movement of the cage net and the shadow it casts underwater can be disorienting to the divers. Care must be taken to have an external reference, even if it is only a compass bearing.

2. **At surface.** It is often necessary to use diving equipment at the surface when servicing enclosures. These structures are most vulnerable to wave action particularly at the point where flexible material is attached to rigid framework. Before diving, account must be made of sea state, and, where several units are linked, care must be taken to avoid getting trapped between the floating support structures. In some cases a surface attendant should stand by to prevent the units coming too close together.

Diving within enclosures: Diving within enclosures is usually associated with repairs or recovery of dropped equipment. Where possible the practice should be avoided since it is claustrophobic and can be deleterious to the experiment. It is inadvisable to dive in systems narrower than 2 meters in diameter.

It is usually impracticable to dive in pairs within an enclosure so a fully kitted standby diver should be in immediate readiness to dive if required. In an emergency it is most likely that the diver will be freed from the enclosure by cutting the material and escaping through the wall. Even in a normal situation the diver will need assistance to climb out from within an enclosure.

Normal lone diver practices must be adhered to. In addition to the diver's own safety line or, more preferably, communications cable, which should be held taut by the surface attendant, a weighted shotline down the center of the enclosure tied to the support framework is a useful reference

point and provides a means of effortless vertical movement for the diver. It is frequently difficult and often undesirable to fin actively when inside an enclosure.

It is possible to repair punctures in watertight enclosures by clamping the damaged sections between suitably sized rigid plates or strips of wood. This requires divers both inside and outside the enclosure simultaneously. Although the material is usually translucent to some degree, it is often difficult for the divers to locate each other on either side of the wall. The best procedure is for the two divers who are to make the repair to arrange to rendezvous at some point on the surface and then to descend together to the damaged area keeping contact by touch through the flexible wall of the enclosure. The buddy diver for the 'outside' diver should stand off and watch the procedure.

When watertight enclosures are damaged they usually collapse. This can create difficulties for anyone diving inside since the airlift effect of the exhaust bubbles tends to draw material around the diver. It is important to be aware of such a possibility since the collapse tends to happen without warning, particularly when the diver is working at the base of the system. It is difficult to swim in such a situation but easy to escape either by hand hauling up the shot line or by careful use of a buoyancy aid such as an ABLJ or inflatable dry suit. In an extreme situation, the diver should be prepared to make an emergency escape through the enclosure wall by cutting through it.

There are no texts specifically on the methodology of enclosure techniques for scientific purposes. The introductory chapter in Grice and Reeve (1982) illustrates some of the types of floating enclosures used. Although there are many books on aquaculture, there are as yet no suitable descriptions of the types of sea cages used in the industry. New designs are constantly being developed, which further emphasizes the need for the diver to be familiar with the particular system before entering the water.

8.3.2. Support, launch and recovery of gear

The supporting role of the diver has proved invaluable time and time again to the marine scientific community. The majority of equipment used in marine research is complex and expensive and often the safe deployment and recovery can be aided by divers.

It is assumed that the equipment is either bulky, heavy or both. Diving techniques may need to be worked out to overcome the problems involved in being on or near heavy or awkward gear moving relative to a ship. A good dive boat should be used (9.2) and the mother ship must have a smaller boat ready for immediate launch in case of emergency.

All straps, shackles and lifting gear must carry the relevant in-date test certificates pertaining to the legislation of the particular country or countries involved.

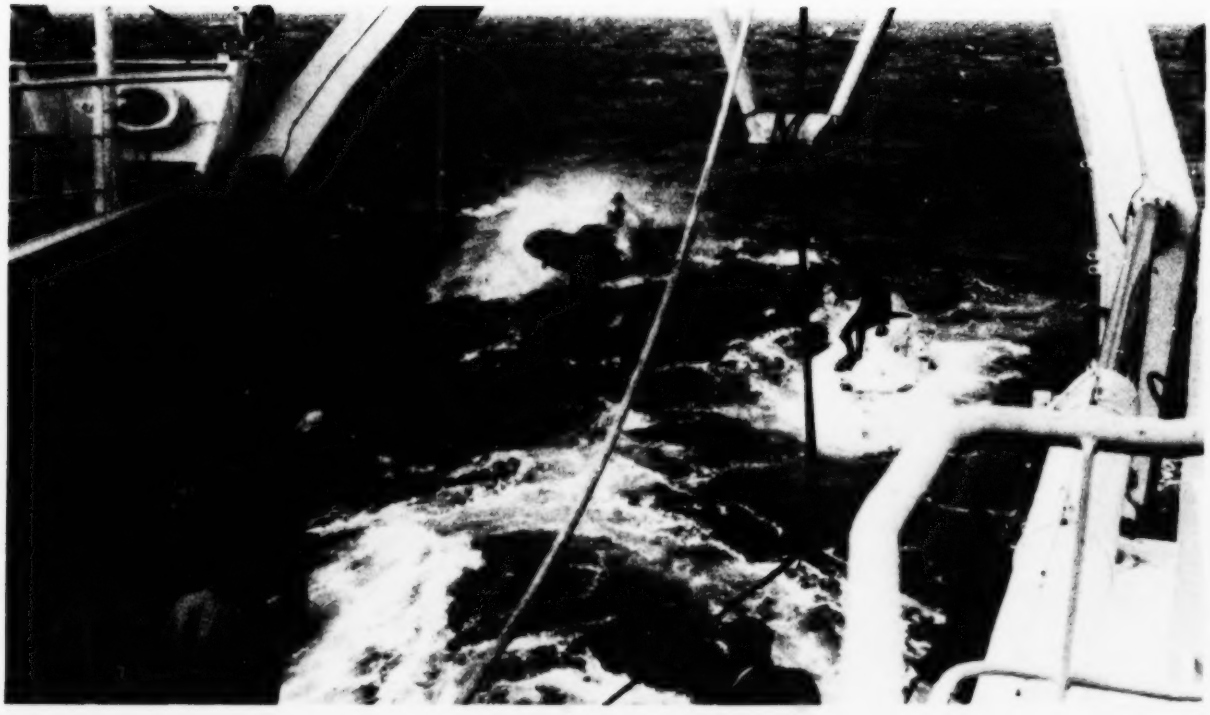

Photo 7 : Divers are needed in several stages of the launch and recovery of scientific research submersibles, and other heavy equipment. The divers attach and disconnect lifting lines, load and unload external carriers of tools and samples, and communicate with the occupants of the pressure sphere. Note the A-frame on the stern of the vessel, and the lifting strop. (Photo, IOSDL).

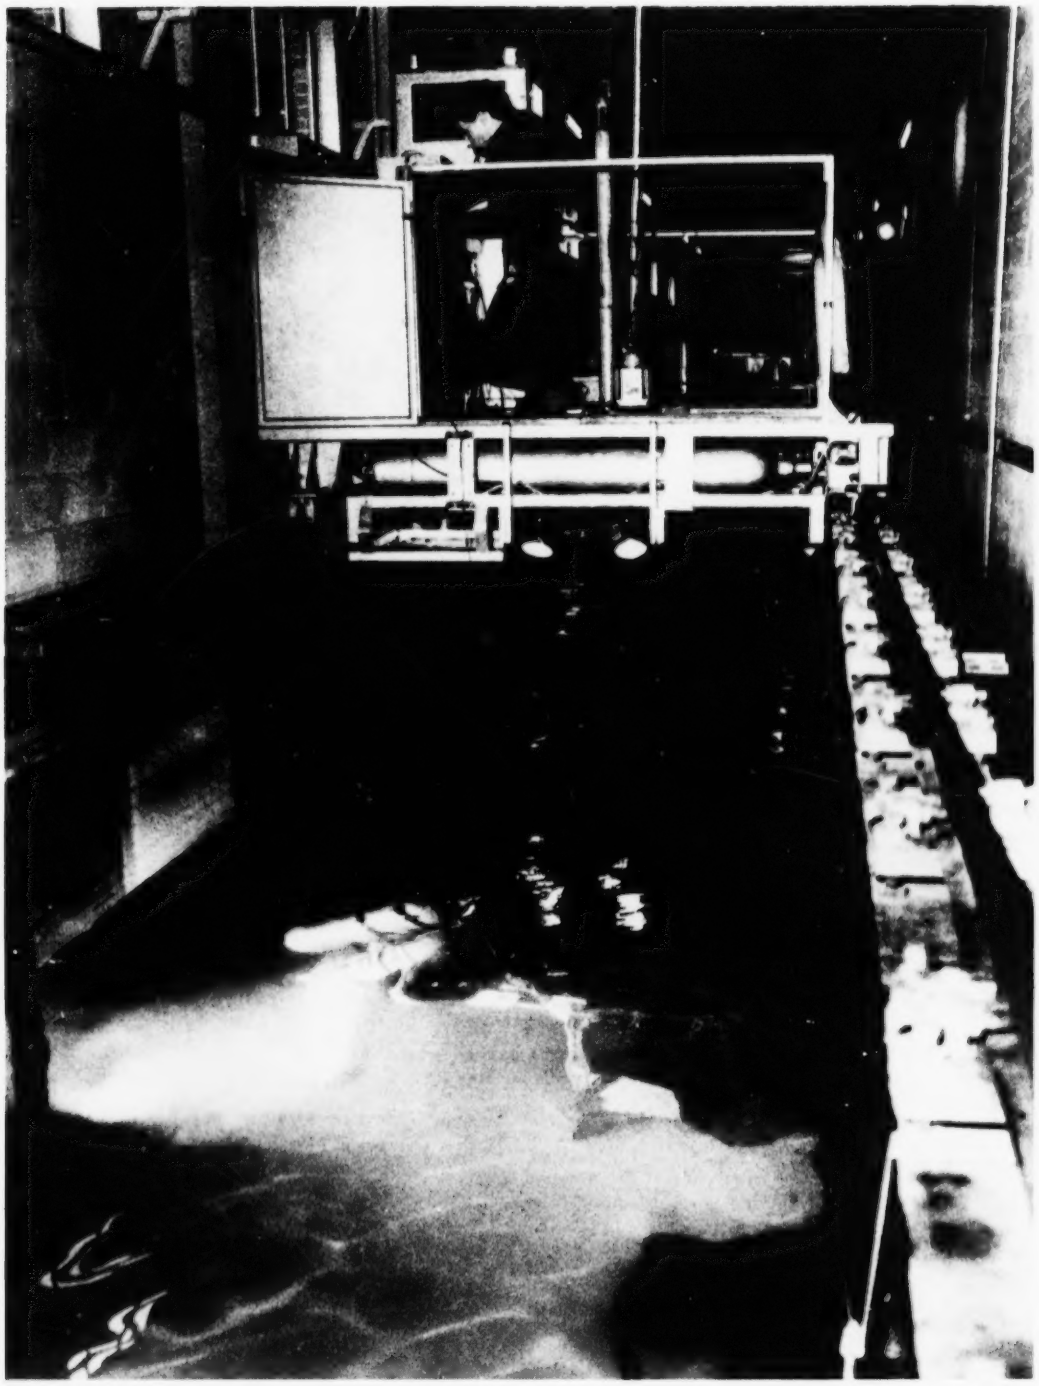

Photo 8 : In preparation for scientific work at sea it is sometimes necessary for divers to work in laboratory tanks to test equipment and procedures. In this picture the diver can be seen working underwater whilst an experimental communications and monitoring system connects him to an observer on the surface. The instrument chariot runs on rails, and for some tests the divers swam along the tank whilst the recording instruments tracked them from above. (Photo, IOSDL).

Prior to diving commencing, arrangements should be made to ensure that no sewage or rubbish is dumped over the side for the duration of the launch or recovery. Apart from the obvious discomfort for the divers, it can also attract unwanted visitors such as sharks.

There is a possibility that a diver may drift away from the ship; this may be caused by the way on the ship or currents and wind. Divers should carry emergency flares and a dye pack. A whistle is a good idea for short distances. When night work is involved the diver should carry a flashing light.

There is little difference in diving technique when handling heavy gear, and most of the concern is brought about by being on or near equipment weighing 2 to 20 tonnes moving relative to the ship. This type of equipment may either be a towed body, a submersible, something that is lowered to the sea bed or a buoy or float. These may be launched either from the side or the stern of the vessel. Some of the following apply to one situation only:

1. Straps and lifting gear may have to be tested under mandatory Regulations.

2. The launch should take place on the windward side of the vessel so that the vessel drifts away from the equipment.

3. Fenders should be large enough to allow a 0.6m gap between the equipment and the ship under maximum compression, so that in the event of a diver getting between the two room will remain. These fenders should be attached to the equipment so that in a swell they move with the equipment, and are not forced out, and will not roll along the ship's side.

4. Two lines should be rigged fore and aft on the equipment to a towing point on the support boat which should tow off stern first in order that the coxswain can see what is happening and may apply full power to one tow line or the other if necessary.

5. If it is possible, release of lifting gear should be by remote means. If this is not possible, then the hooks should be fitted with grab lines and the divers should wear protective helmets.

6. Care should be taken that no diver is caught beneath a pitching stern, particularly if the ship is transom sterned. In vessels with spoon counters it has been found that divers are displaced with the water, although this should not be relied upon.

7. In stern launch procedures, it is general practice to have way on the parent vessel. As this requires the use of the propeller, close contact must be maintained between the bridge and the diver's boat. When the propeller is started or revs increased, there may be a large surge and this is potentially dangerous.

8.3.3. Locks, culverts, ships' propellers or hydraulic inlets

There is the absolute necessity in diving around heavy machinery or hydraulic intakes for the diver to ensure that nothing will be moved, started or operated while the diver is in the water other than carefully planned and executed test procedures. All automatic operating systems must be disabled and the engineer, ship's captain or the person otherwise in charge of the operation of these systems must work closely with the diver and his/her handlers. It is strongly advised that the diver and the surface handler be in constan- communication both for the efficient carrying out of the tests or inspections and for the safety of the diver. The danger of a diver being sucked onto the grill over a hydraulic inlet must be avoided. Procedures for locking the propeller shaft etc., are laid down in Navy Manuals and commercial diving manuals.

8.3.4. Diving underway

For the purposes of this section, the term underway shall apply to ships moving through the water. Also see Section 8.3.5.

A vessel will require a diver-support boat under these circumstances:

1. If it is of such a size that it cannot approach divers safely in prevailing weather conditions.

2. If it is of low manoeuvrability whether inherently or as a result of apparatus deployed from the ship.

3. If a diver's body heat will be lost rapidly when he would otherwise be towed through the water.

4. If delays in recovery of the divers are possible.

Separation procedures: Where appropriate the divers shall carry flares, flourescent dye packs, a strobe light and a whistle. If the risk of a diver

being separated from the support boat is thought to be great, radio beacons should be worn or fixed to a surface buoy on a shot line. Consideration should be given to the use of acoustic communications or pinger and tracking devices. There may be circumstances, for example working on fishing gear, when it is safer to reduce extraneous gear to a minimum in order to reduce the chances of becoming snagged on the moving apparatus.

If a diver is seen to be drifting astern and the support boat is unable to pick him/her up, a previously prepared buoy shall be dropped to mark his/her position. The diver should make every effort to attach himself/herself to the buoy, which will be fully fitted with rescue equipment. The buoy should be large enough to be found and should have a radar reflector.

When working on towed apparatus, there should be a trailing line leading to a substantial surface float. This can be fitted with one or more quick release clips so that divers leaving the apparatus are marked at the surface. If one diver has reason to surface, he/she should ascend the trailing line. The surface support boat should be stationed alongside the trailing line float.

If it is noticed that a diver is missing, the marker buoy should be dropped immediately to provide a reference point.

If a diver drifts astern unnoticed, first the whistle and then up to half the flares should be used. It is important that the diver's flares are acknowledged as soon as they are seen in order to prevent panic. If these are not acknowledged, the diver should proceed in the direction of the ship assuming that no reference buoy has been dropped. If there is doubt as to the direction of the ship, the diver should remain where he/she is; after swimming in the direction of the ship for about half an hour and finding no buoy, the diver should stop to conserve energy.

The fluorescent dye pack should be securely attached to the diver and should only be used if an aircraft is sighted in daylight.

Decompression: Decompression diving underway must be avoided.

8.3.5. Diving on towed fishing nets

Diving on fishing nets is a practice that has developed over the years by research scientists involved in the design and engineering of trawling gear and in the behavior of fish reacting to the gear (Main and Sangster, 1976, 1978, 1981, 1982, 1983, 1984, 1985). It is not a dangerous type of diving, if approached with both common sense and good diving techniques. However, it is different from almost all other standard types of diving, as the fishing net or fish species under study is always in motion. Therefore the diver has, on most occasions, to keep up with the subject whilst being towed through the water at speeds up to a maximum of 2 meters per second (4 knots) and obtain results.

Direct observation and quantitative measurements by divers on trawl fishing gear require the development of a great deal of personal skill and experience and must be approached with caution. Initially, a great deal of time is needed to develop both skill and the methods that will produce the maximum amount of relevant information during each dive in a limited 'no-decompression' time.

Choice of Diving Personnel: Divers should be experienced and well qualified in all standard diving techniques. Divers must be capable of maintaining an increased breathing rate and preferably strong in the arms to hang onto fast moving gear and withstand an increased body drag. The divers should be not prone to sea sickness, as vessels can work well offshore.

Basic Training: Although the ideal approach is to work with a team already well versed in fishing gear diving, this may not be possible for various reasons. The alternative is to try to simulate the real thing. A simple approach is to tow a heavy weighted rope behind a boat at a relatively low speed (1 knot). Allow a selected pair of divers to descend to the weight at approximately 10 meters depth, hang on and attempt simple tasks whilst trying to regulate their breathing rate at that towing speed. Increase the speed and complexity of the tasks, as experience permits, eg: photography or communications. Instruct the divers to move their heads into and across the water flow, to feel the effect of drag on the face mask and mouthpiece. All these simple steps will improve their ability for underwater work and increase their strength at realistic towing speeds.

Equipment and Accessories: This type of diving requires a lot of common sense. Always remember this when choosing your equipment prior to a dive. Nets are full of snags and diving equipment has many pins, buckles, toggles, etc. Only take equipment that is really necessary for the job in hand. The most suitable diving gear is:

1. Dry suit with suit inflation worn over an appropriate undersuit. This will provide adequate insulation in cold water conditions.

2. Single tank scuba with a quick release harness. This is preferred to a twin set or a back-pack. This is lighter to handle on the heaving deck of a ship and is less of a drag on the individual at higher towing speeds.

3. Single hose regulator fitted with a contents gauge rather than the twin hose demand valves. It has been known for the second stage to purge due to the water flow, but this is not a common occurrence and can be overcome by a small piece of easily removable tape or by fitting a stronger spring. If taped voice recordings or communications are necessary on a dive, then a mouth box can be fitted to the second stage in place of the mouthpiece. This is preferred to the full face mask although either will reduce the pressure on the jaw muscles and will also keep the lower face warm and protected against jelly fish stings.

4. A depth gauge, watch and knife are essential. The knife should be worn on the forearm rather than on the thigh or lower leg. In this position it is less prone to snagging and it is more accessible in a current which tends to straighten the body.

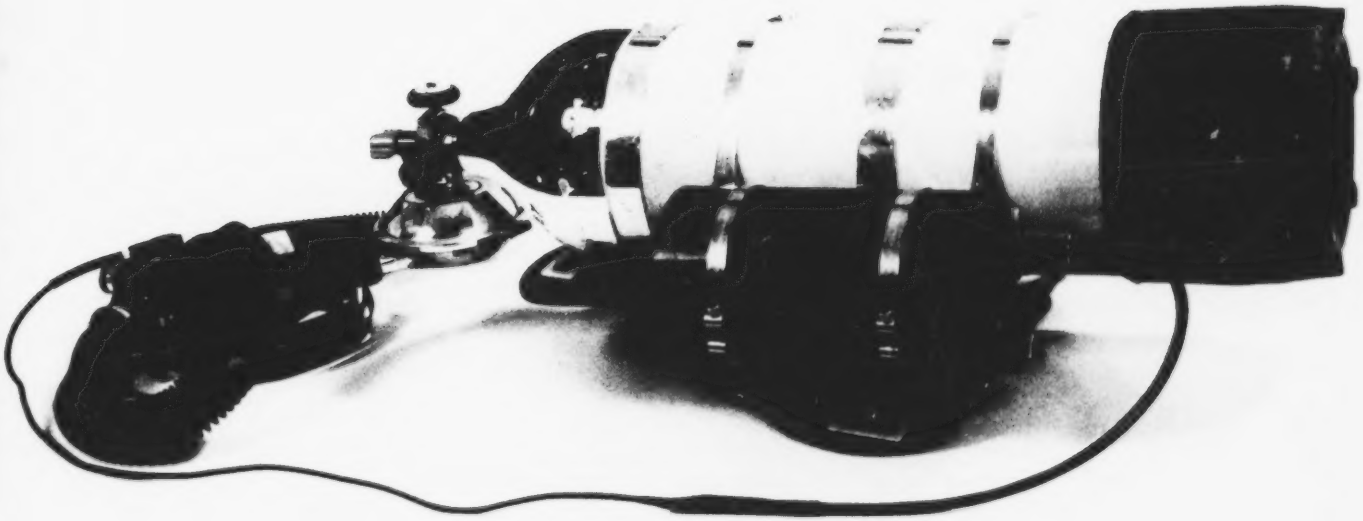

Photo 9 : A tape recorder is valuable for recording a verbal record of visual observations and measurements. A twin hose regulator is attached to a voice box which fits over the mouth and chin, permitting the diver to articulate words reasonably clearly. The microphone is connected by a flex to the tape-recorder which is mounted in a pressure-proof cannister on the breathing gas cylinder. (Photo, IOSDL).

5. A small cassette tape recorder in a watertight housing with a remote microphone on a 'flying lead' allows many minutes of continuous real time information to be stored. This system eliminates the use of writing etc. A diver carried, self contained, low light video-recording system with an audio track is probably the ultimate in free diving efficiency.

6. A large inflatable boat with a powerful engine is recommended. This rescue/tender boat should have a diving ladder for easy access, VHF radio for communication with the towing vessel and all necessary safety equipment.

Pre-dive Procedures at Sea:

1. A total understanding of the geometry of the gear by the divers and a pre-dive briefing with skipper, crew, divers and boatman is essential so that everyone understands what is expected of each person.

2. A team of five divers is ideal with preferably diving in pairs with a maximum of three diving at any one time depending on the task. Two divers is the most practical team, with the third used as a standby diver in the tender boat.

3. The skipper of the fishing vessel should inform other vessels in the area of the proposed diving program and ask them to stay clear. The 'A' flag must be shown.

4. Operations will almost certainly be dictated by weather conditions and it is usually the tender boat being unable to cope with the sea state that will cause cancellation of the exercise.

5. Although the expected diving depth has been pre-planned, unexpected changes in depth due to surface wind changes and cross tides can alter the ship's course into deeper water. Be aware of the depth that must not be exceeded and carry decompression tables for emergency use.

6. The tender boatman will be in a position behind the towing vessel. It is often impossible to follow air bubbles unless there is a calm sea; therefore the boatman should look astern of his craft as well as to the sides and ahead. It is beneficial to have a lookout with a radio situated on the stern of the towing vessel as that person is higher above the water and can see farther.

Free Diving on Towed Fishing Nets: There are basically three types of moving fishing gear; seine net, pelagic or mid-water trawls and demersal or bottom trawl.

1. Seine Net. This is the easiest type of gear to work with, as the net begins from a stationary position and slowly increases in speed through the water up to about two and a half knots. The danger point in this category of net, is the fact that the netting is quite loose and floppy in the stationary mode. The meshes can easily snag a diver, but as the net moves forward, it becomes quite firm and safe to hold on to.

2. Pelagic net. This can be the most dangerous type of net to the diver because it can be towed over very deep water. The net can also drop through the water column for a number of reasons. If a diver was caught up in a trawl and the buddy diver could not effect release, the ship could not be stopped and the net would have to be winched up to the surface at a speed that the divers could endure.

3. Bottom trawl. This is safer than other gear to dive on, as it is towed over the bottom and in the event of any mishap, the ship can be stopped without fear of the net sinking into deeper water. There are problems of sand and mud being thrown up by the otterboards and passing back along both sides of the trawl, often completely obliterating part of the wires and netting. Until experience is gained, it is essential that the vessel tow a straight course to minimize this danger.

Observing Technique: The divers begin either from the stern of the towing vessel or the tender boat positioned along side the vessel. Jumping from the stern of the fishing vessel appears to be more dangerous than it really is. A diver entering the water from the large boat is more relaxed than kitting up in a small tender boat. Prior to entering the water, the dry suit must be really well vented of air and the weight belt should be slightly heavier than normal. The team should enter the water and swim down the chosen warp while remaining together. It is not advisable to hang on to the warps as they are greasy and may have broken strands of wire. The divers should be able to follow the warp to the sea bed by treading water and dropping through the water column. This allows time to regulate breathing, check that all divers are in the right frame of mind for the task in hand and adjust cameras, instruments, etc. Swim past the otterboards, sweeps, bridles until the net approaches and both divers can then either catch hold of the net and be towed through the water, or alternatively allow the whole net to pass by. The latter method is used really only for filming techniques. Never attempt to swim with the fishing gear as the diver cannot sustain fast speeds for any length of time. On completion of the exercise return to the net and stay together; leave together and do not waste time on the sea bed. Check depth and time and ascend to the awaiting tender boat. On the surface stay close together. Never use blob line or marker floats as this can be lethal when working with fishing gear (6.7).

Towed Underwater Vehicles: To overcome the many problems of divers hanging onto towed nets, the use of a towed wet vehicle carrying two divers, cameras, communications equipment, etc. is extremely valuable and much safer than the divers remaining free in the water. However, this can be expensive and may need a bigger team to operate it. Nevertheless, this system can produce remarkable results in a relatively short time.

8.3.6. Diving from large ships

For the purposes of this sub-section, a large ship will be a vessel of 1000 tons or over, with a freeboard of 5m or more (Also see Section 8.2.4.).

The advantages of diving with a large support ship of this size are the ability to work anywhere in the world's oceans, long endurance at sea, good

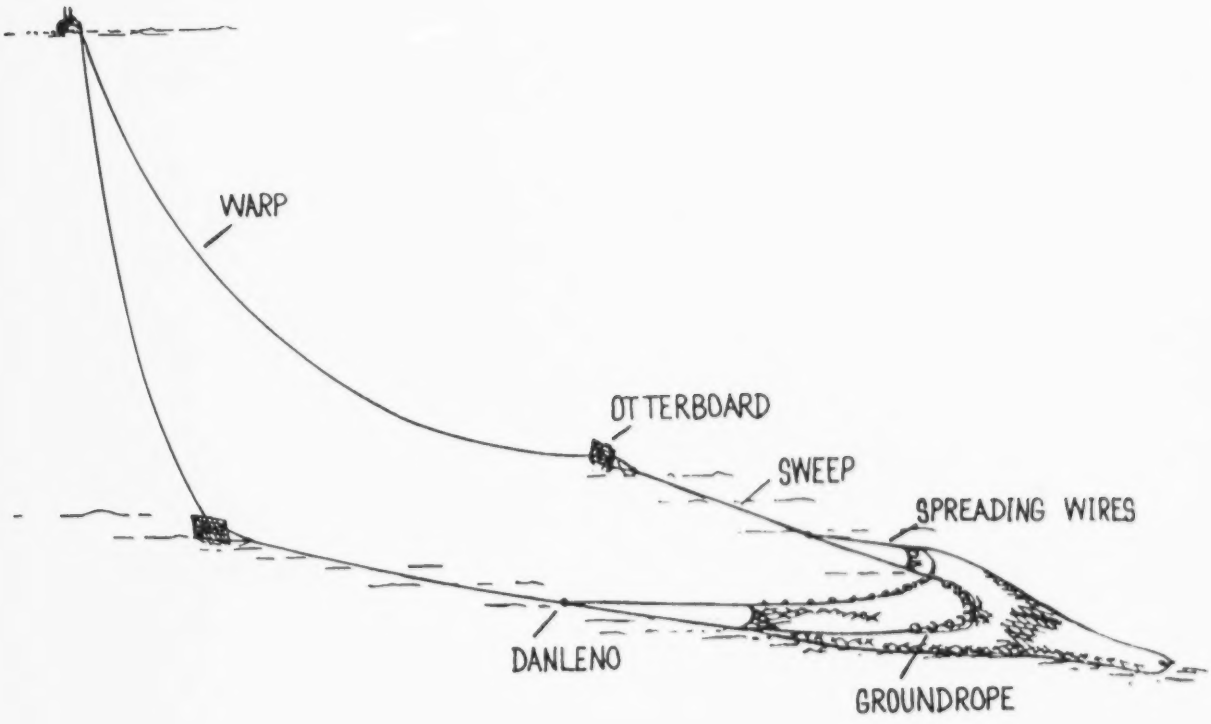

Photo 10 : Terminology of parts of a trawl net, showing the components which may have to be photographed or measured by divers.

Photo 11 : Otter board moving over the sea bed dragging the trawl behind it, and keeping the trawl mouth open. (Marine Laboratory, Aberdeen).

Photo 12 : A diver swims over the mouth of a trawl net. In the foreground the spreading wires, and the floats on the head rope. (Marine Laboratory, Aberdeen).

Photo 13 : This close-up picture of a trawl in action shows the behaviour of the fish in the mouth of the trawl. (Marine Laboratory, Aberdeen).

Photo 14 : A scientific diver moves over the trawl observing the fish in the net, and photographing the performance of the net. (Marine Laboratory, Aberdeen).

living conditions, excellent technical back-up, medical facilities, good radio communications, accurate navigation, good laboratory conditions and the possibility of evacuating an injured diver by helicopter. There is also good long range visibility from the bridge, use of radar and an ability to ride out storm. The opportunity to dive in these circumstances will usually arise from participation in an oceanographic cruise on a large research ship, or possibly research in association with the offshore oil industry or fishing industry or from a naval vessel.

Problems arise from the following factors: high freeboard, difficulty and time needed to launch and recover boats; slow manoeuvrability of a large ship; technical difficulty of starting and stopping main engines; difficulty of bringing a large ship close to shore, rocks or reefs; danger of being hit by the ship, especially when working near the stern.

High freeboard: Boats, equipment and divers have to be lowered into the water, often from upper decks where there is more space. If a work boat is used, this may be stowed on davits. An inflatable will usually have to be lowered from a crane, using strops. Launch should be on the lee side of the ship. In windy conditions an inflatable can swing or rotate and hit against the hull, unless stabilized with line fore and aft. Divers and equipment may be embarked from a companionway, or by the crane. Because of the high freeboard, assistance to a diver in trouble can only be given by people already in the diver tender boats.

Launch and recovery of boats: Launch and retrieval of boats is time-consuming. In emergency, an extra boat cannot be launched quickly, and similarly, in emergency, a boat carrying an injured diver cannot be retrieved quickly. Allowance should be made for these factors when planning operations, and planning the equipment carried on boats. Thus all boats should be equipped with radio to the mother ship, radar reflectors, tool kits, first aid kits etc. (6.2.5). If the work is in the open ocean, boats should carry complete survival kit and rations.

Manoeuvrability: Large ships have a large turning radius and in addition at slow speeds tend to be influenced by wind. A large ship always has considerable momentum. In the absence of lateral thrusters, a large ship at slow speed or hove to will be strongly influenced by wind. As a result of these factors it usually is not possible or desirable to maintain the vessel in close station to the divers, unless the work permits the divers to drift with the ship. Operations should be planned so that the diving is controlled from the small boats, and oriented directly to the boats. The ship may be stationed or drift 1-2km from the divers.

If the main support ship is needed to launch scientific equipment in conjunction with diving support, it is presumed that the ship will be at anchor, or will have thrusters or dynamic positioning, so that it can maintain station. If dynamic systems are being used, the strictest precautions MUST be discussed fully with the ship's Master and the chief engineer before diving commences as these initiate automatically and might engage when a diver is in a dangerous position (Appendix 2 for industrial manuals and regulations).

Starting and stopping engines. Large engines must be allowed to heat up and cool gradually. For each ship and engine type there is a strict procedure for the rates at which speed can be increased or decreased. Diesel electric propulsion is an exception since the electric motors can be varied in speed without harming the diesel engines. Similarly, feathering propellers provide added flexibility. Notwithstanding these factors, it is generally true that large ships which are hove to cannot move quickly ahead without advance warning to the engine room. Conversely, the engine room requires notice of intention to stop. By careful discussion with the Ship's Master and First Engineer, it is possible to establish what procedures can be accepted as the norm, and what can be done in emergency, and hence work out a routine for maintaining the optimum close support of the diving operation.

Working close to shore and rocks. The Master of a large ship will not wish to endanger his vessel by bringing it closely to shore, reefs or rocks, where quick manoeuvres and rapid changes of speed are essential. It is reasonable for a vessel without thrusters to be kept at least 1-2km from any navigational hazard. Divers planning geological sampling or study of biological substrate should be aware of this stand-off distance when planning operations.

Working close to the ship. When working close to a large ship, there are dangers from being trapped between the hull and any adjacent boat or equipment, from engine water intakes and outflows, from swinging blocks or lifting tackle and above all from the rise and fall of the stern of the vessel. Depending upon the weather conditions and the precise shape of the stern, the degree of "slap" will vary from ship to ship. Nevertheless, until close experience and inspection have proved otherwise, no diving should be permitted close to the stern of a large vessel. In all operations close to the ship, there must be the closest consultation between the Diving Officer or Dive Marshall and the Ship's Master and the First Engineer. Where relevant, crane operators and other technical support crews should be fully briefed also.

8.3.7. Severely contaminated water, toxic, and non-aqueous liquids

Engineering and scientific projects sometimes require working with large quantities of polluted or toxic water, or with non-aqueous fluids such as diesel oil or paint, or in water with dissolved toxic gases. During installation of instruments or sensors, or in carrying out unexpected maintenance requirements, it may be useful to have carefully prepared divers to work in these unusual circumstances. Such circumstances may arise in studying pollution or leakage from dumped toxic wastes, or within large tanks or containers. The strictest safety precautions must be applied in all such circumstances, and the Diving Officer should conduct careful consultations with experts familiar with the hazardous or toxic chemicals involved.

Never dive in fluids containing highly toxic chemicals such as acetic anhydride, bromine, methyl parathion, acrylonitrile, epichlorohydrin, or chlordane. Never dive in fluids that contain contaminants that could dissolve the latex rubber in diving suits. Always consult an expert chemist

or pharmacologist to assess the risks from the known concentrations of potentially toxic chemicals in the water before diving.

Foam neoprene suits are almost impossible to decontaminate after severe exposure, and do not provide sufficient protection underwater. A complete dry suit should be used, with integral boots, and gloves that can be sealed onto the suit at the wrists. Helmets must totally enclose the head, and be sealed to the suit, and the helmet should preferably have a slight excess internal pressure. Exhaust valves should have a double exhaust flap system so that droplets of fluid cannot leak back onto the breathing circuit.

Suit materials must be smooth and slick on the outside so that they can be decontaminated. The surface attendants and line tenders should be protected by appropriate suits and gloves, since the handling of lines and the diver's equipment will inevitably put them at risk. Before diving, the Diving Officer must ensure that the appropriate decontaminating and scrubbing agents are available on site so that equipment can be cleaned when the diver exits the water.

Advanced equipment for protection of divers from severely polluted or toxic conditions has been developed by the National Oceanic and Atmospheric Administration (NOAA) in the U.S.A. (Barsky, 1986; Tejada, 1985; Wells, 1984).

8.3.8. Sewage contaminated water

Typical situations that necessitate diving in sewage are: sewage works maintenance, sewage outfall construction and maintenance, sewage outfall environmental impact survey, and marine engineering site investigation. The main problems encountered are poor visibility and risk to health through bacterial or viral infection. To minimize these problems, first determine whether the sewage flow or volume can be reduced by the operators; secondly, carry out the following precautions: Minimize exposure of skin to water by using a complete dive suit. Use a full face mask. A drysuit is preferable. If a wetsuit is used, swim through clean water before and after sewage contamination. Use life-lines and diver telephones to maintain contact. Have a typhoid and any other prophylactic injections as indicated by local conditions at least one week before the diving. Avoid stirring up sediment on the bottom by careful buoyancy adjustment. Do not dive with cuts or abrasions. Avoid swallowing. Wash all equipment and body in disinfectant following the dive. Rinse eyes with optrex or some other solution after the dive. Rinse ears with earwash solution of 80% iso-propyl alcohol, 5% glacial acetic acid and 15% water after the dive. Spit out saliva frequently after the dive.

If the sewage is untreated (that is raw or only mascerated) it is essential to wear a drysuit providing full bodily cover; (See 8.3.7).

When diving in enclosed vessels such as sludge digesters, roping and voice communication is necessary. Supplied air should be breathed until well clear of the vessel and the diver should be fully separated from the diving medium. If there is space above the fluid in the vessel, it will almost certainly not be breathable and may be an explosive mixture.

8.3.9. Polluted water and estuarine conditions

Scientists are increasingly required to dive in polluted littoral zones that have received biological, agricultural and industrial effluents and discharges in order to study the impact of pollution. In addition to modern pollution of these waters, many estuaries contain areas that are 'polluted' through the natural processes accompanying restricted water circulation and oxygen depletion. In heavily polluted waters all the procedures accompanying diving in sewage contaminated waters should be followed, but the risk of serious infection is not as great. These waters are usually not as unpleasant to dive in as seriously sewage contaminated water as the concentrations of pollutants of a corrosive or anoxic character are not so great.

8.3.10. Reactor shielding tanks

Diving in reactor shielding tank is only carried out when the reactor has been defueled or prior to fueling; there is therefore no danger from excess heat. Most work is of an inspection and repair nature and is thus of an entirely commercial character. The only hazard is of remnant radioactivity and levels are measured using a dosimeter carried by the diver; a dipped dosimeter is often used in planning the course of a dive as it can be placed in positions that the diver will occupy and the radioactivity levels of the dive can be calculated. All diving is tethered with a surface attendant in constant voice communication.

Many large, and some small specialist, diving companies carry out industrial diving in reactor shielding vessels and scientists wishing to dive in these sites should consult with these companies. Ideally, the scientist should be able to work with the company personnel in carrying out the scientific work with the normal commercial back-up; these are not low-cost diving sites.

8.3.11. Offshore platforms

The presence of the structure itself is the principal factor in determining the safety of diving from offshore platforms. The platform, which is expensive, is not there for its own sake but usually for some industrial or other purpose. The platform is usually associated with a complex of instruments, projecting arms, cables, wires and drilling equipment. A diver swimming into this maze of engineering needs to be fully acquainted with the distribution of equipment. Knowledge of the geometry of the platform and its superstructure is mandatory, especially in low visibility conditions. It is often best to work from inside the frame of the structure, which may be the space most free of wires and cables. In all work scenarios entanglement is a serious risk. Changing tides, currents and the passage of fronts can cause the water to accelerate and change direction suddenly as it passes through and around the frame members.

Photo 15 : Diver wearing a dry-suit with integrated face-mask and mouthpiece to protect the face from pollutants in the sea water. The breathing gas is from a surface supply. (Photo, Nardo Vicente).

When a task has to be performed on or near a submerged structure or platform, there must be an extremely detailed plan of the activity to be carried out underwater. This should be limited to a simple job objective for each dive. The surface team and the divers must have detailed instructions and communication between diver and the surface must be carefully defined in the absence of a telephone link.

Diving may be carried out from small oceanographic platforms, experimental engineering or research platforms, or operational oil platforms. If scientific divers are required to work from an oil industry platform, it is probable that they will have to comply with the industrial and commercial diving regulations.

Where petroleum exploration or development drilling or production is being carried out from a platform, the conduct of diving must be very carefully phased so as not to interfere with work. In some cases this will mean that diving has to be carried out whilst industrial operations are continued, producing considerable noise and vibration underwater. Great care should be taken to ensure that diving operations are only carried out when there is no risk from heavy equipment or machinery moving underwater.

All diving operations from platforms should be additionally supported by a small boat. This is a great help when the divers need to exchange tools, adjust instruments, bring up samples, etc. Furthermore, in the event of emergency, a small boat can track the diver, whilst support personnel on the platform obviously cannot move. In stormy conditions it can be difficult for the divers to approach fixed members of the platform, and it is much safer to home onto a support boat.

Platforms often attract submarine life, including large fish and possibly sharks. Noise may help to keep them away, but this is more than compensated for by the usual attractions of food, garbage, etc. that is discharged into the sea from a platform. Divers working around platforms should always be on the look-out for sharks. In the event of injury to a diver working on a platform far from shore, it may not be possible to evacuate the diver in bad weather (6.3.5.; 8.2.15).

8.3.12. Electrical fields

Installations producing pulsed or varying electrical fields such as screens, barriers or 'guides' to control the movement of aquatic animals, and impressed current anti-corrosion cathodic protection systems are the main source of hazard to the diver (Shilling, 1976; Mole, 1984). Electrical systems for guiding fish are fortunately very little used either inland or on the coast, primarily because they consume a great deal of electrical power. Inland electrical-fishing operations are associated with groups of people, wires, generators and often non-metallic boats. Military areas where electrical systems may be used are best avoided unless there is full cooperation.

General: The physiological effects of electrical fields increase progressively with increasing field strength, and depending on the direction

of the diver's body within the field. The direct effect upon the body of electrical shock is related to the magnitude of the current passing through the body; especially the heart. This is known to be variable between people and there is much variation in data published on the effects. However, the diver may sense the effect of an electrical field or observe progressively erratic behavior of a compass or of fish. The effects of increased field strength and likely body current usefully can be divided into three main reaction groups.

1. The first reaction or perception threshold or shock with no loss of muscular control, whilst in fish fright and discouragement are observed. This first reaction is often associated with low frequency pulsed DC fields and large annodes (less than 10 mA DC, 2 mA at 60 Hz or 20 mA at 10k Hz).

2. Painful shock, difficulty in letting go or muscular contractions whilst in fish electrotaxis is observed. Electrotaxis is a mixed reaction of attraction or repulsion and is associated with forced swimming of mid-water fish. It varies with the direction of the DC electrical field and its strength. Alternating current, as opposed to pulsed direct current, is rarely used for electrofishing as it causes rigid muscular spasm or tetanus. This second reaction is often associated with high frequency pulsed fields set up within the water (less than around 100 mA DC, 25 mA at 60 Hz, 100 mA at 10k Hz).

3. Ventricular fibrillation or in fish electronarcosis, immobilization or with sufficient power or close proximity or contact, death by electrocution. This reaction is associated with short-term contact or close proximity to large power sources (3 seconds duration; greater than around 500 mA at DC, 100 mA at 60k Hz, 500 mA at 10k Hz. Or 0.03 second duration, 1300 mA at DC, 100 mA at 60k Hz, 1100 mA at 10k Hz). The figures are taken from Haigh (1975), Smoot & Bentel (1971), Shilling et al. (1976) and Cromwell et al. (1973).

The conditions which influence the currents passing through the diver are influenced by a great variety of factors which include the water conditions (temperature and water chemistry, particularly conductivity), the electrical signal (frequency, shape and duration of pulse), the electrodes (size, shape, orientation and separation), the diver's orientation in the electrical field and the distance apart of wetted areas (wet vs dry suits).

Sites where electrical fields may be in operation comprise installations which are known to vary greatly in both the electrical power used and in the frequency of its pulsation or variation. They include:

1. Near intakes to pumps and turbines to prevent the entry of fish. They are commonly placed upstream of the main debris screens.

2. On complex watercourses or below dams to guide fish into 'passes' through or around obstacles. 3. Near channel entrances or exits to prevent the entry of intruder or unwanted aquatic animals.

4. On or around fish farms to isolate fish for management purposes.

5. In general where fish are required to be captured by stunning. This technique has also been used experimentally for fish shoal capture and the removal of burrowing animals. Recorders of fish activity or numbers by electrical methods are of little danger to the diver when functioning correctly, but can be associated with fish 'guides'.

6. Cathodic and Impressed Current Protection systems particularly on off-shore installations. 7. Military and associated installations and vessels. 8. Proximity to large power carrying underwater cables.

The most obvious hazards are:

1. When drifting with the current. The diver may progressively be influenced by the electrical field and become unconscious or could be held on an electrode itself. This situation would include oblique or transverse pulse electrified screens in rivers or near fixed coastal installations.

2. Installations being switched on during dive operations. A locked-off key system must be used where this possibility is known to exist.

Although freshwater applications occur (their rarity may be a danger in itself), marine systems require large amounts of power and ,except for cathodic protection, alternatives are normally sought. In general, there should be no diving if there is a significant electrical field and if one is suspected, suitable precautions must be taken; the use of metal dive-boats must be avoided. The development of a suitable test meter is proposed.

The diver should try to maintain constant vigilance of unusual sensation when diving in unknown waters. Watch for unusual fish behavior and be aware that electrical fields affect compasses upsetting underwater navigation.

8.3.13. With large or dangerous animals in aquariums

The working divers at an oceanarium dive and work in controlled aquatic environments with a number of exotic species of animals, both mammals and fishes (8.2.12; 8.2.14). Many of these aquatic animals are, or can become, a threat to the uninformed diver.

Before entering any tank or facility with animals, talk to the handlers or curator to learn about the animals you are to dive with. If possible, identify each individual animal and obtain information about its specific behavior and personality. The more you know about the specific animal's natural or learned behavior, the safer you will be upon entering their environment.

1. Behavior of the species: Learn the general behavioral characteristics of each animal species, especially larger fishes and sharks. Know antagonistic and aggressive postures and movements. Observe animals and note natural and unnatural movements.

2. Physical capabilities: Learn the physical capabilities and capacities of each animal species. Know the range of motion of the animal, i.e. up and down or side to side locomotion. Know the strength and speed at which it can move.

3. Mating season: Know the mating seasons of each animal species. Males especially become more aggressive, as will females. Male dolphins or manatees may even attempt to copulate with humans during this time.

4. Females with young: Female mammals will become aggressive in protecting their young. Do not make any attempt to move toward or touch newborn or young.

5. Groups or single animals: Know and understand the social structure or hierarchy system of a group of animals. This will help avoid confrontations with the dominant animal.

6. Length of time in captivity: The longer an animal is in captivity, the less fear of man develops and they may become more aggressive. Also in an unnatural environment, unnatural behavior may develop or be learned. This is especially true with the smaller dolphin or toothed wales.

7. Climatic changes: Temperature and barometric changes seem to affect animal behavior. Cooler water can make animals more perky and aggressive while extremely warm water can make them irritable. Barometric pressure, along with extreme temperature changes can affect sharks and fish behavior.

8. Territorial behavior: Dolphins, whales and sea lions are territorial and may display aggression toward intruders.

9. Newly rescued or injured animals: An injured wild animal can be dangerous and unpredictable. The animal may or may not display aggression toward its captors owing to pain and/or fear.

Diving with animals other than shark:

1. Upon entry, observe animals and watch for nervous or erratic behavior.

2. Keep calm, swim slowly.

3. Once animals resume normal behavior, you may proceed with task at hand.

4. Watch for agitation among the animals while you work.

5. Never make a move toward an animal that maybe interpreted by that individual animal as an aggressive action.

6. Aggressive warning signs, usually before physical harassment, may appear as jaw snaps, false charges, fast or erratic swimming, rigid body posture, etc. Exit the tank upon observing this behavior.

7. Aggressive physical harassment by animals may appear as head butting, tail slapping or sometimes biting (mainly nipping bites with sea lions).

8. To exit the tank, swim along the bottom and up the side watching the animal as much as possible to fend off attack. Still do not take aggressive action. Swimming across the surface seems to be a submissive gesture and you may be subject to greater physical danger.

Diving with sharks (Also see 8.2.12)

1. Upon entry watch for nervous or erratic behavior.

2. Be calm and swim slowly.

3. Do not block the path of or corner a shark.

4. Never enter a tank with open wounds or pass bodily wastes once you are in.

5. Aggressive warning signs such as rigid body, arched back pectoral fins pointed down, exaggerated swimming action are but a few signs. Once these signs are observed you should exit the tank as fast but as quietly as possible with **NO SPLASHING**. Splashing and fast, abrupt movements on or underwater emits low frequency sound vibrations which will attract the sharks.

6. In the event of attack: a. Face the shark as much as possible while exiting. b. If more than one shark, crawl along the bottom then up the side. c. If the shark comes in for an attack, bring your knees up to your chest and kick him off. Preferably be on top of him and kick down or underneath and kick up. The shark can spin around much faster than he can move up or down in that their locomotion is from side to side. The eyes and gill slits are also vulnerable and can be punched or jabbed to ward off attack. d. Always carry bang sticks or shark billys for defense and use a shark cage when possible. There is little defense against a shark that is intent on the kill.

Remember that you are there on the animal's terms, not yours. You must respect and obey their rules.

8.3.14. Shipping lanes and fishing ground

If possible, the relevant local and national authorities must be notified well in advance so that 'notices to mariners' can be issued. This may be a legal requirement in some areas. Diving anywhere near fishing

grounds can cause problems both for the diving party and the fishermen. As part of the pre-dive planning, the local fisheries officer or the local fishing co-op or fisherman's organization must be informed. It is courteous to inform the local fishermen individually insofar as this is possible. Finding out the normal hours that fishermen plan on being in an area will allow the divers to try and dive during hours when fishing is at a minimum. Don't bother asking fishermen to change their schedules to suit the diving.

Divers must either tow marker buoys or descend buoyed shot line. They must surface up these line and must signal the surface or their intention to ascend. An affirmative reply must be received before ascent commences. In addition, there should be some remote method of signaling the diver either to stay down or surface. The use of an underwater voice communications system is highly recommended.

Whenever possible, diving should be conducted from a mother ship with a dinghy keeping close station on the divers. Appropriate signals must be hoisted. The support boat should carry radar reflectors. A radar check must be kept aboard the mother ship by the officer of the watch.

Diving involving decompression stops is not recommended as rapid recall of divers may be necessary with the approach of a vessel.

8.3.15. Subterranean artificial environments

Background: Some experiments require large tanks underground or in enclosed environments, such as an excavated cavern or mineshaft. This example is provided.

In an effort to provide experimental data on the matter of Proton Decay, a theorized mechanism of sub-atomic prticle behavior, a test tank 80 by 70 by 60 feet deep, containing 10,000 tons of ultra-pure reverse-osmosis water was constructed in 1981 in a working salt mine near Cleveland, Ohio. It was necessary to choose a site at considerable depth (2,000 feet below ground) in order to provide some shielding from background cosmic rays that would otherwise interfere with the experiment.

The tank was constructed by excavating a hole of the proper dimension and lining it with a double layer of 2.5mm high density polyethylene. By pumping the water collected between the liners, it is possible to know very accurately the amount of leakage (if any). A floating ceiling of black Hypalon was placed over the tank to insure total darkness when the detector operates. Two thousand forty eight photomultiplier tubes, each 8 inches in diameter and fitted with a one meter square plate of light gathering plastic, line each of the six sides of this cube-shaped tank.

Establishment of Diving Operations: Following early successful support efforts, it became clear that diving would be necessary on a routine basis, not just in the installation phase. A diving team was built up, conforming to the University Diving Program.

Equipment specifically suited to the needs of the project was purchased and stored on-site to ease mobilization and to minimize the opportunities of contamination of the water. Equipment chosen included Viking (bag) dry suits, full-face masks with communications, dual 80 cubic foot tanks and a lightweight unbilical consisting of a safety line with a communications conductor threaded through it. A compressor was placed on site.

Current Procedures: The Proton Decay (PDK) Dive Team is made up of University students and employees who must meet all the requirements set forth by the Diving Safety Committee.

Additionally, PDK Divers are trained in the specifics of the task (diving in enclosed space, entanglement potential, blackout potential, contamination avoidance, etc.). Special attention is also paid to safety requirements set down by the federal Mine Safety and Health Administration and the owners of the salt mine in which the experiment is located. The use of mine safety equipment (hard hats, battery lamps, carbon monoxide scrubbers, safety shoes, ID tags, etc) is also necessary. For those divers regularly visiting the site, special courses in mine safety and first aid must be scheduled and completed.

Diving is limited to no-decompression profiles and a 10 foot safety or precautionary stop is taken at the end of each dive. Because of the higher than normal air pressure above the dive tank, adherence to decompression table times introduces a safety factor. The tender makes regular air pressure checks and records the progress of the dive on a prepared form which becomes part of the permanent record

SECTION 9. BOATS AND SUPPORT EQUIPMENT

9.1. Introduction

All divers who are carrying out regular diving operations should familiarize themselves with both large and small boat operations as their knowledge will raise the level of safety. This section is not intended to be a substitute for the many excellent manuals on seamanship and boathandling courses, and these should be used in conjunction with this Code of Practice along with any regulations or institute instructions for the operation of diver's boats. Divers should be trained in boat handling and inshore navigation.

9.2. Suitable vessels and support boats

Three sizes of craft will be considered: i. Small boats for direct close support of divers; ii. motor launches or craft up to 10 - 20 meters in length that can provide support facilities, storage, etc. for a day or more of diving operations in coastal waters; and iii. sea going and ocean going vessels.

1. Whether in the open sea or in coastal waters, divers shall normally be attended by a small boat. This small boat may be dispensed with only when diving near the shore in clear, calm water with negligible currents. The small boat should be easily and safely entered from the water by divers, and will be fitted with waterline hand holds strong enough to take the weight of the fully kitted diver (6.2.5.). The boat will be stable and ride the sea without wallowing and it must have positive buoyancy in several sections so that it cannot sink even if holed; this applies to solid, semi-solid and inflatable boats.

The type of small boat usually found most suitable for diving is either an inflatable with a hard floor or a flat-bottomed dory of from 3 to 5 meters in length. It should be powered by an outboard engine of between 25hp and 40hp which is suitable for extended running at or near the idle position as well as being able to keep running at higher revs without overheating. A motor with two cylinders and a remote fuel tank is recommended. A smaller spare engine should be carried if the boat is working alone and any running engine should be bolted to the transom or secured to the transom with a strong line. At least double the expected fuel expenditure should be carried. Switch-over of fuel tanks should be made with the first tank on half to ensure return if the spare fuel is contaminated. Fuel should be run out of the tanks in staggered order based on the most recently mixed fuel available. A pair of oars should be carried.

2. The most suitable motor vessel for a small diving group is about 10 meters long, with a small cabin, large cockpit, inboard (diesel) engine and preferably with a propeller guard but without a deep keel. An inflatable or dinghy should be carried or towed (6.2.5.; 6.2.6.). Larger vessels of 10-20 meters in length can provide support, transport, accommodation, compressor, etc. for several days or weeks of diving in coastal waters.

3. A large diving support ship (6.2.6.) shall have a means of safely and rapidly launching a small boat. A sling must be securely attached, preferably to rigid parts of the small boat and not to eyes fixed to rubber patches.

A number of ships, particularly those with larger complements, are now using sewage plants in which several tons of sewage are stored in a caustic solution before being automatically discharged, complete with the caustic solution. This could be a serious hazard to a surfaced diver and arrangements must be made with the officer of the watch to prevent discharge while diving operations are in progress (8.3.6).

9.2. Safety equipment carried on board

An experienced coxwain, who shall be responsible for the dive boat, must remain in the boat throughout the course of the diving. It is recommended that the coxwain take no part in the diving, but commonly members of the diving team will take turns as the coxwain or boatman, as equally the divers also act as divers' assistants and boat crewman to set and raise the anchor or shot line. It is also desirable to have snorkel cover available in the boat to assist the divers on the surface, particularly if they have brought to the surface heavy or bulky specimens.

The boat will carry a suitable anchor or anchors to deal with the range of bottoms likely to be found; normally a length of chain and weights will be fitted above the anchor. The end of the anchor rope must be attached to the boat by eye-splice and/or snap-clips.

The boat should carry a securely attached watertight emergency box or boxes carrying:

1. In date distress parachute or rocket and smoke flares; weighted thunderflashes where allowed, but these may be considered as explosives and not allowed in some countries.

2. A spare spark plug and plug spanner, water repellent (WD-40 or silica spray), split and shear pins and a length of narrow rubber tubing sufficient to be used as a fuel line on the engine block.

3. Spare starter cord.

4. Basic tools for dealing with the engine and boat (e.g. screwdriver, adjustable spanners, pliers, thin-bladed knife) as well as the regulators and harnesses of the diving gear. Serious maintenance such as repairing cameras, should be left until return to the support ship or land base.

5. A small but comprehensive first aid kit.

6. A card carrying the information important to post-dive safety (6).

7. A repair kit and suitable foot or hand pumps in the case of an inflatable.

8. A small bottle of medical oxygen and resuscitation mask to be used only for dealing with a decompression sickness emergency.

9. A radio with appropriate frequencies should now be carried on any scientific diving boat.

10. The boat should carry and display an appropriate divers' flag only when the divers are in the water.

11. A boat shall carry a compass, chart, and navigation light or lights appropriate to the boat's length if operating at night or in fog. A collapsible radar reflector is recommended.

Additional items are required when working in remote areas or other special or extreme conditions (8) and care should be taken by the Diving Officer to ensure that all possible boat-items are available and in working order. Many lists of equipment, often recommending proprietory brands, are published.

It is the responsibility of the Dive Marshal and Dive Leader to check the emergency box and other boat equipment before each diving day, and at each change of diving group on the boat.

When the divers are down the boat should remain close at hand and on watch so that the divers can be picked up as soon as possible on surfacing. If there is liable to be any doubt about the position of the divers when near the boat (e.g. in surface water of low visibility), the propeller will be at rest unless fitted with a propeller guard.

The boat, particularly if it is a fiberglass dory, should not be overloaded and should be kept as tidy as possible (6.2.5).

Except in conditions of absolute safety, all passengers and crew in a small boat should wear buoyancy aids or diving or exposure suits.

In the case of an inflatable, it is important that equipment does not chafe the floats. This can be achieved by means of an interior canvas lining to the boat and by careful stowage of gear.

9.4. Range of operating conditions

Depending on the type and size of boat and motor being used, the level of teamwork and the physical capabilities of the diving party, as well as the nature of the scientific work, the range of operating conditions will vary.

Some boats are much more capable in bad weather than others, ie: a Zodiac MK IIIGR with a 35-40hp motor is much more seaworthy than a Zodiac MK IIC with a 15hp motor and the working limits of the basic boat provides the primary constraint. On the other hand, the MK IIIGR cannot make rapid way in sea conditions much above those associated with force 5 winds, whereas an Avon 5m Searider can make excellent way and provides possibly even a better diving platform, except for the low transom that causes the boat to be rather

easily flooded. Maximum operating conditions for a diving boat will largely depend on its size and power. For instance, 16ft RNLI (GB) inshore rescue inflatable with 40hp engines are not permitted to operate more than 5 miles (8km) from the coast or in wind force exceeding 6. This is a maximum for an emergency service and routine diving operations should be well within this limit. Smaller and less well engined boats will have substantially lower limits.

Diving from large launch or specially designed diving vessel can be managed in very bad sea conditions but the divers can be in some danger in the immediate vicinity of the boat. In bad conditions no diving boat should be anchored, especially when divers are in the water, unless there has been or is liable to be an engine failure.

Experienced divers operating with proven equipment can work safely in conditions that would be hazardous for less well prepared divers.

Some operational requirements are:

1. Limits of weather and sea state should be stated in the operational instructions for each project as each diving area will be subject to somewhat different conditions because of local protection and back-up.

2. If there is any possibility of deteriorating conditions whilst divers are down a rapid recall system must be available.

3. It is the Dive Marshal's responsibility to satisfy himself as to weather outlook, including listening to the broadcast forecast for shipping. Weather services will often be ready to supply detailed forecasts for a particular area on request and this service should be used, if possible.

4. In poor conditions, operations should be cancelled or suspended well before they become dangerous. It is the responsibility of the Dive Leader in charge to use judgement.

9.5. Diver recovery aids

(Also see 6.3.1.; 6.3.2.)

A diving boat, if anchored on dive station must be moored in such a way as to be able to slip immediately, e.g. by buoying the anchor line. When operating in currents, a downstream float and floating line of adequate length will be trailed from the boat if it is anchored or from the shot line buoy (8.2.8) if the boat is manoeuvering. A diving boat will have adequate water-level hand hold and will be fitted with a diver's ladder for ease of boarding. Divers should practice the technique of getting into an inflatable unaided and with no ladder as they are otherwise helpless alongside an unmanned boat. A short, but blunt boat hook for pulling the diver in can be put on the handle end of an oar/paddle and can be useful for reaching a rope or a diver.

9.6. On board compression chambers

Because of their size and bulk and the cost of operating them safely, on board compression chambers are only found on large ships (8.3.6). The presence of an on-board compression chamber is advisable and even a legal responsibility for certain types of diving, especially in remote areas or in blue water diving well away from a compression chamber on land. The chamber should be at least two compartment with a double airlock entry chamber into a larger chamber that can be entered for shorter periods by medical and other personnel. Standard sets of this equipment are commercially available and back-up and operating systems are all well established (8.3.6). If a chamber is to be used, at least two members of a diving team must be trained in its operation.

One-person transportable chambers must only be used if there is a guaranteed system of rapid transport to a fully supported two-compartment chamber facility, and the proven capacity to transfer an injured diver under pressure.

SECTION 10. SPECIAL EQUIPMENT

This section discusses some special types of experimental equipment that scientific divers may need to use from time to time.

10.1. Towed sledges

Diving on a towed sledge may be necessary when it is important for a diver to study or inspect some object moving in the water faster than he/she can swim, or faster than an unstreamlined diver/DPV vehicle. A sledge also provides the means to survey or photograph rapidly very large areas of the seabed. The divers usually shelter behind a streamlined fairing that allows them to pass through the water at speeds that would tear off their equipment if they were not so sheltered.

Vehicles without a buoyancy control must only be used when the maximum seabed depth is within a safe diving depth. This type of vehicle cannot be used over very deep water, since in the case of the towing vessel stopping, the towed vehicle would tend to sink steadily with the divers.

Vehicles with a buoyancy control can be trimmed to stay at a safe diving depth, but most work within the "No decompression limits". This would allow a buoyancy controlled vehicle to work over deep water when necessary.

Ideally, vehicles should carry two divers.

Vehicles should carry the following safety equipment and have the appropriate back-up facilities:

1. A location device should be fitted to the vehicle ie. a pinger, for which a locator is held in immediate readiness for the back-up team, so that the vehicle could be quickly located in case the tow line parts.

2. Communication to the towing vessel by line or through water must be provided for both occupants.

3. Communication must also be possible between the occupants in the vehicle.

4. An emergency breathing system should be fitted for both occupants in the vehicle.

The divers should check the vehicle and equipment before it is deployed and again after they enter the water prior to diving. Following positive checks and a clear signal from the divers, the surface controller should then give clearance and permission for the dive to commence.

Occupants should wear scuba diving equipment whereby the divers can leave at any time whilst under tow and ascend to the surface in an emergency. Divers should normally remain with the vehicle until it has surfaced and the safety boat closed up.

Monitoring should be carried out by the surface control team of diving times, depth, positioning of the vehicle, and the comfort of the divers in relation to cold.

Vehicle occupants must have complete over-all control of a dive unless there is a breakdown in communications where the surface controller would take over and take appropriate action to continue or terminate the dive.

A cover boat must be in position well astern of the towing vessel and equipped with radio for communications to the towing vessel. The divers' cover boat will display the divers' flag and should carry an emergency and first aid kit.

The towing vessel should warn other vessels in the area to stay clear and give a wide berth whilst diving is in operation. Appropriate diving and towing signals and lights must be shown.

If for some reason the ship stops, the vehicle must be able to return to the surface on the maximum length of the cable deployed using its own buoyancy and at the correct rate of ascent for normal scuba diving.

Adequate protection against the cold must be provided ie. uni-suits or dry suits with thermal underwear; the divers may be in the water a long time with little activity.

Basic training should be provided in the handling techniques of the vehicle.

The task to be attempted must be fully discussed and understood by both divers and controllers including the skipper.

Divers should not be attached to the vehicle by buddy lines. The exception is where the diver is connected by a communication cable and these should have McMurdo type plugs and sockets where quick release is possible.

Trailing marker lines from a vehicle is not always practicable or advisable and especially when working with fishing gear, pingers must be an accepted alternative.

Divers should not enter a towed vehicle until it has been deployed and is well away from the towing vessel.

10.2. Wet diver transport vehicles, diver propulsion vehicles (DPV)

Diver propulsion vehicles have their own power units and are steered by the diver altering the position of his/her body and fins. The speed may vary, but the diver is usually moved directly through the water as there is rarely a faring to provide for shelter or streamlining. More elaborate DPV's that the diver can actually get into are really mini-submarines.

Since the introduction of free diving a range of submersible vehicles designed for the transportation of scuba divers with and without additional equipment has been developed for sport, military and commercial purposes. Although their utilization has been limited, there are definite areas of underwater activity that benefit from their application. The Farallon Diver Propulsion Vehicle is probably the most successful and well known DPV, although many other manufacturers also produce similar vehicles. These vehicles are used for towing divers on survey, inspection and exploratory dives for an hour or more at speeds of 1-3 knots. More sophisticated vehicles which enclose the diver and offer protection from cold, drag and dangerous predators, are also available in limited numbers but are more often designed and built individually by institutions or enthusiasts. If the application of a diver transport device is contemplated then the following points should be taken into consideration:

1. Discipline. Submersible vehicle operations must be disciplined with an accepted set of rules to ensure the safety of those involved.

2. Chain of Command. This should be composed of experienced and competent personnel to ensure proper vehicle maintenace, dive planning, operational and emergency procedures. Factors to be taken into account include overall safety of the mission, liaison with support vessels and shore support, battery charging and vehicle preparation, vehicle launch, dive and recovery, personnel briefings, pilot and crew endurance, crew experience, emergency arrangements.

3. Pilots and Crew. Pilots should be experienced divers with good understanding of their environment, have an aptitude for mechanical and electrical systems, and be familiar with the complete submersible system. The pilot should be responsible for the Pre- and Post-dive checks. Crew members must be familiar with the emergency procedures. Rapid ascents and descents should be avoided as ear clearing can be difficult if both the divers' hand are engaged on the DPV.

4. Dive Planning. Should take into consideration the location and environmental conditions, the dive objective, the schedule, special mission needs, safety considerations, communications, vehicle and crew endurance, weather and tides, water depth and topography, known hazards, water temperature, emergency procedures, etc.

5. Support Vessel. Must be available to stand by and track the DPV from launch till safe retrieval. Tracking a marker float is quite realistic in water free from obstructions and of limited depth. Sea state limits for launch and retrieval should be established. Surface visibility of less than one mile (1.6km) should prohibit submersible operations.

6. Check list. The more sophisticated the vehicle is the more elaborate the check list required, but even the most simple of vehicles should have a fixed routine to avoid battery gas hazards and accidental floodings.

7. Submersible/DPV. Maximum dive duration should be established as should emergency reserves of power which should not be utilized for any other purpose. Speed should be restricted within the visibility limitations of the

water. Dive times and ascent rates must never exceed those of normal scuba diving practice. Operational range must not exceed that of clear communication between the submersible and the support vessel. Post operational de-briefing must highlight any equipment malfunction which should be corrected before a further dive.

8. Vehicle design. Should minimize the possibility of entanglement. Emergency power and de-ballasting facilities should be provided. Battery compartments must have gas tight integrity from switch gear and other electrics. Batteries should have emergency isolators, circuit breakers and be appropriately fused. Battery compartments should be well ventilated for charging and preferably purged with nitrogen before closing or opening. An Explosimeter can be used to test for hazardous gas mixtures. Do not underestimate the dangers from either a short circuit or gas emission. Consider static and dynamic stabilities of the completed vehicle and crew both at the surface and underwater. Consider vehicle drag, total battery power required, control surfaces, buoyancy and trim control, waterproofing techniques, instrumentation, ergonomics, payload and safety from electrical shock (8.3.19; 10.5.1).

9. Operating procedures. Should be established for: Battery charging and dive preparation, launching, communication and tracking, surfacing, recovery and towing.

10. Emergency procedures. Should be established for: Vehicle loss underwater and at the surface, electrical failure or fire, flooding, entanglement, H.P. air loss, loss of surface contact, diver loss and vehicle out of control.

11. Safety equipment. To be considered would include: RDF Beacon, xenon strobe light, pinger, lifting lines, marker lines and buoys and portable transceiver radio kept in a waterproof container for emergency use on the surface.

10.3. Remote Controlled Vehicles (RCV)

These are also known as remotely operated vehicles (ROV). Divers are commonly employed around RCV's when they are being placed in the water and when they are being taken out. Once they are lowered in the water and the lifting gear is released, often by divers during the course of inspection check-out, the RCV descends under remote control from the mother vessel. Divers may once again be used when the RCV comes to the surface in order to ensure that lifting harness is properly connected and that the RCV is safe to lift.

Use of divers in the vicinity of RCV's must be closely controlled as the personnel controlling the vehicle are usually out of site of the vehicle, as the control room is often within the ship or in a windowless container console on deck. Because the thrusters on the RCV can cause serious injury to a diver, the handling operations must be part of a well ordered drill, controlled from the deck of the mother vessel by a controller who is in

visual contact with the divers and with telephone communications to the control room.

A small RCV with lights and video-camera, sometimes known as a "flying eyeball", can work efficiently with divers, providing an overview for topside supervision, work guidance, and safety.

10.4. Use of explosives

Many underwater operations can be carried out quickly and conveniently by blasting using explosives underwater. These include deepening rivers and channels, cutting piles and dispersing wrecks. The use of explosives under water is complicated by the necessity for special waterproofing precautions, especially where electrical shotfiring is used, by the difficulty of placing explosives charges most effectively and by the weight of the overlying water. These difficulties are more than offset by a considerable economy in labor and the great saving in time in which the operations can be completed.

Special attention may be required in underwater blasting to ensure that there is no excessive vibration or shock which might cause damage to neighboring structures or equipment. This is because water and water-bearing deposits are very effective transmitters of shock waves. Where the explosives are placed in shotholes, the chief factor will be ground vibration, but with unconfined charges the effect of the water-borne shock will predominate.

Divers handling explosives should attend a recognized course on explosives at a suitable military or civilian establishment. Normal precautions for handling explosives should be taken.

The peculiar effects of underwater explosions are summarized by Shilling et al. (1976) and the U.S. Navy Diving Manual (1979). Any person exposed to underwater blast of any severity should receive medical attention, whether or not them seem to be injured. Internal damage can be serious with no superficial symptoms.

Storage and Detonators. There is a danger that stray electric currents near outboard engines or electrical equipment may accidentally set off a detonator. Always short out detonators by twisting the lead wires together. Store the detonators as far away from the actual explosives and electrical sources as possible. Hand operated exploders are safer than batteries, but if batteries are used keep them in a dry box with a lid. Fuse ignited detonators are more shock sensitive than electric detonators. These should be kept in the manufacturer's cartons within a box that will resist fragmentation. Quantities carried should be kept to a minimum.

Procedure. Charges must be made up on the surface and the person making up a charge in a boat should wear no diving equipment other than a suit. Great care should be taken to check the whereabouts of divers since a mistaken diver count could lead to a diver being in the water when a charge is detonated. It is probably best for a single diver to lay the charge and to be solely responsible for detonating it. Care should be taken that a boat

does not drift over a charge before it is detonated. Most divers swim with a left or right bias; make sure that the diver setting the charge has not swum full circle laying the charge under the boat. When the diver has placed the charge and left the water, only then should the other end of the cable be connected to the exploder at the firing station and the shot fired.

If the diver is to return to the unfired charge, first disconnect the cable from the exploder. In the event of a misfire great care must be observed. No person shall be allowed near a charge unless it has exploded or until an interval has elapsed of not less than 30 minutes in the case of firing by fuse, or 10 minutes in the case of firing by electricity.

General recommendations for shotfirers:

1. Do not store explosives, detonators, etc. except in a proper magazine which is clean, dry, well ventilated, well constructed and properly locked.

2. Explosives and detonators must be stored separately, either in separate magazines or in a compartmented magazine. In this connection it should be noted that detonating fuse should be stored with the explosives.

3. Do not smoke or allow any matches or open lights in or near the magazine or whilst handling explosives and detonators.

4. Do not keep any metal tools in a magazine and only wooden tools should be used for opening cases.

5. Do not drop or slide cases of explosives or handle them roughly.

6. Issue explosives and detonators in the sequence of manufacturing dates marked on the cases.

7. Do not open cases inside the magazine.

8. When a case has been opened, its contents should be used before opening another case.

9. Do not make up primer cartridges inside a magazine.

10. As in storage, boxes of explosives and detonators must not be transported with anything else such as metallic tools and inflammable liquids.

11. Where feasible, explosives and detonators should be conveyed in separate vehicles or carried by different people. If both have to be carried in the same vehicle or by the same person, they must be placed in separate containers or in one container that is adequately partitioned.

12. Again as for the magazine operations, when unloading the boxes or containers from the vehicles or when setting them down, they should never be

slid on the ground or over one another. Each should be lifted carefully and put down without shock and never dropped or thrown about.

Instructions for blasting operations must be directed by an experienced person fully qualified to do so. Detailed inquiries can best be delt with on an individual basis by reference to appropriate military or civilian personnel by scientific divers when they wish to involve blasting in their work. Table 10-1 shows explosives that are recommended for underwater use.

Table 10-1. Explosives recommended for underwater use.

Product	Description	Cartridge diameter	Head of Water (depth)	Duration of Immersion
'Subaq' 90	High density, high strength gelatinous explosive. Plastic cartridges with built-in channel for detonator leads or 'Cordtex'	63mm/2.5in	Down to 43m (140 ft)	Several days
'Subgel'	High density, high strength gelatinous explosive. Plastic cartridges with built-in channel for detonator leads or 'Cordtex'	63mm/2.5in	Down to 46m (150 ft) or more	Several weeks
Special Gelatine 80% & 90%, Seismic Gelatine	Medium density, medium strength gelatinous explosives. Paper and chipboard cartridges	All sizes	Down to 6m (20 ft)	A few days
Opencast Gelignite	High density, high strength gelatinous explosive. Chipboard cartridges	70mm/2.75in	Down to 30m (100 ft)	A few days
Plaster Gelatine	High density, high strength gelatinous explosive. Paper/ polythene wrapped slabs	Various slab and cartridge sizes	Down to 46m (150 ft) or more	Several weeks
Submarine Blasting Gelatine	High density, high strength gelatinous explosive. Paper and chipboard cartridges	All sizes	Down to 450m (1500 ft) or more	Several weeks

10.5. Use of electricity underwater in equipment and experiments

Underwater electrical equipment (8.3; 10.2; 10.3) introduces hazards to scientific diving (8.3.19).

Water, particularly if it is salty, is a moderate conductor of electricity. There is, then, an apparent hazard to divers and submersible pilots who have to work with electrically controlled equipment. However, it can be safe to use electricity underwater (8.3.19).

The most obvious of the dangers from electricity underwater is electric shock from a malfunctioning or improperly grounded aparatus. When using any electrical gear underwater, therefore, it is imperative that the equipment be thoroghly tested before it is deployed for use, and then only in the precise manner that it was designed for. Electric shock can come from either a generator or battery source and it should be noted that a 48 volt battery for a DPV can often deliver a more serious shock than a 120 or 220 line voltage because of the higher amperage loading of the batteries.

10.5.1. Units powered from surface or remote batteries

If the casing of the electrical apparatus is metallic, it should be electrically continuous and should be adequately earthed by a suitable electrode at the battery or generator end of the system. Conventional overcurrent protection, preferably supplemented by earth leakage trips provides a similar safety factor to that of earthed hand-tools used outdoors on the surface. A system using an isolation transformer and amplified differential earth leakage protection is to be preferred. A limit of 5mA tripping current is suggested - if false tripping occurs at this level it indicates inadequate insulation in either the cable or apparatus. The possibility of using intrinsically safe supplies (i.e. those employing potentials below the limiting value) exists but care must be taken to use design information obtained from a reputable source.

10.5.2. Units powered by self-contained batteries

Self-powered units present an electrical and an explosive hazard. Batteries should be connected just before use and disconnected as soon after use as possible.

Electrical hazards. If the case is either metallic and electrically continuous or insulating, then even in the event of implosion the risk of dangerous external fields is minimal. Care must be taken if attempts are made to salvage such items as it may take several hours for the batteries to discharge.

Explosive hazards. The risk of explosion is considered to be the main hazard with self-powered units.

Many batteries (even when described as sealed) evolve hydrogen at times. Table 10-2 indicates when this may happen. Unless nitrogen or oil immersion is used, all such units should be opened when on charge and after use in the water. H_2 plus O_2 is the explosive mixture resulting from an evolution of H_2 into an air filled compartment. The opening of all underwater battery compartments must be carried out in the open air away from any burning material and very hot surfaces. Once air flushing has been carried out, the vehicle can be reassembled, but not sealed and the small amounts of H_2 that may evolve after discharge should dissipate without danger as long as the batteries are in a well ventilated place.

Additionally, protection against sparks may be obtained by using magnetically operated reed switches. As very considerable quantities of hydrogen can be evolved from a battery discharged to a level where the weakest cell is reversed biased, it is strongly recommended that a circuit be incorporated to isolate the batteries when their EMF falls below a predetermined level.

Table 10-2. Evolution of gases from batteries

Battery	Under Charge	Normal Discharge	Discharged flat-so that some cells may reverse bias
Lead Acid	$H_2 + O_2$	H_2	$H_2 + O_2$
Ni-Cd	$H_2 + O_2$	None	$H_2 + O_2$
Sealed Ni-Cd	Possibly H_2	None	Possibly H_2

10.5.3. Other hazards with batteries

Emission of toxic fumes can be a problem associated with various batteries and good ventilation is always sufficient to deal with this problem.

Fumes from overheated insulation may be a problem, but dangerous plastics that evolve poisonous or carcenogenic gasses under high temperatures are now only commonly found on older insulation. Diving Officers should inspect the wiring and the age of the equipment to assess the likelihood of this problem with their equipment.

All electrical equipment should be inspected from time to time and at the first sign of trouble, should be subjected to replacement or very thorough service and further inspection.

A code of practice for use of electricity underwater has been published by CIRIA (1982).

10.5.4. Precautions when handling equipment on boat or surface

Divers and personnel with wet hands should not be allowed to handle batteries and electrical apparatus on the surface. Potentials that are not dangerous or even detectable to persons with dry hands may be dangerous to a diver whose skin is soaked with salt water.

10.6. Use of radioisotopes and radioactive chemicals

This section is concerned with biological and, possibly, some geological experiments in which material is exposed to radioisotopes in relatively small, sealed containers underwater, or as low-activity sediment tracers. Experiments where large amounts of radioisotopes are administered to open systems are not considered and would require special authorization should they be justified.

10.6.1. Relevant authorities and literature

The use of radioisotopes in most countries is strictly controlled by a large amount of legislation concerned with handling, storage and transportation of the materials (Appendix 2). Divers wishing to use radioisotopes should make reference to appropriate governmental or other national authority that is charged with supervision of radioisotopes. Nuclear Energy Boards, Departments of Energy, Ministries of Health, Radiochemical Inspectorates, or other agencies can be identified within most countries.

10.6.2. Legal requirements and recommendations

The project must have the prior approval of the national controlling authority, usually your own laboratory radiation protection officer. The site or area where you propose to work and the isotopes to be used must be registered with the appropriate government authority. Overseas work must conform to any local regulations, which are best interpreted and implemented with the help of a local institute.

Personnel must be designated radiation workers, or at least registered under a scheme approved by your laboratory, and they should all have prior experience of using the radioisotopes in question in the laboratory before using them underwater.

Amounts and kinds of radioisotopes used must be covered by a government Registration Certificate (where appropriate), and final disposal must be at a place and in the ways allowed by a Certificate of Authorization for the Disposal of Radioactive Waste.

There are strict laws governing transportation, and packaging of radioisotopes whilst in transit, especially in North America and Europe. Also, make sure that you and your vehicle are insured whilst carrying and using radioisotopes.

10.6.3. Accidental spillage or loss of radioactive samples

Consider the following points carefully:

1. Is there any possibility of spillage, either at the surface or underwater, from an unsealed isotope source due to equipment malfunction or breakage? Samples are most at risk when being handled at the air-water interface, especially on a rocky shore, and also in small boats in rough weather. If spillage occurs, is there any danger to public water or food supplies, or to the environment by localized concentration via the food chain?

2. Can the containers with radioactive materials be readily relocated and recovered under most weather conditions, to prevent loss of radioisotopes on the seabed, or will they stay in place for later recovery without risk of displacement or washing ashore? Mark them conspicuously in case this should happen.

3. Are the containers so stowed during underwater transportation as to allow the diver to jettison them safely for later recovery should difficulties arise?

10.6.4. Protection of divers from radiation sources

Experiments using beta-emitting isotopes such as carbon-14, calcium-45, and phosphorus-32 are relatively safe. There is little risk to the divers from the external radiation itself since water is a good absorber of beta-particles, although the stronger emitters such as P-32 may give a large radiation dose if contained in a thin-walled vessel held in the hand. The sea also offers a vast dilution ratio should accidental spillage occur underwater. Amounts of radioisotopes should be kept to a minimum - not more than a few millicuries in any experiment - and special consideration should be given to work in freshwater environments in view of the possible subsequent uses of the water. For this reason use the isotope with the shortest half-like that is practicable.

No experience has yet been gained using gamma emitters, such as the biologically interesting metals, in underwater experiments. However, if these are planned, it must be remembered that water is not a good absorber for such radiations and further shielding such as lead will be required underwater as well as on land. Divers will also require waterproofed safety film badges for such work; these can readily be adapted from those used in the laboratory.

10.6.5. Disposal of waste

Remember that a large amount of water may have to be transported back to the laboratory after the experiments, for authorized disposal. Therefore take sufficient strong containers and conspicuously labelled packaging for this. The same applies to all solid waste and to other materials such as preserved experimental material and samples for analysis.

10.7. Use of acoustic energy

Most acoustic devices, echo-sounders, range-finders, directional beacons, etc., radiate so little power as to be completely harmless. However, there are acoustic systems used in geophysical research, long-range sonar, and military acoustic systems that radiate power at an intensity that could be harmful to divers in the water. When divers are likely to be working near such systems the Chief Diver/Diving Officer should establish contact with the operators of the systems, and ensure that power is not radiated during diving.

SECTION 11. DECOMPRESSION

11.1 Introduction

In all institutions where scientific diving is conducted, there should be a recommended set of decompression tables, approved by the diving officer or the Diving Control Board, which are compatible with national legislation. All the tables mentioned specifically in this section are acceptable, but the list is not exhaustive. There are other tables, some of which may be mandatory in some countries. In this chapter the most commonly used tables are compared for some of their characteristics, with particular reference to the tables generated in the USA and Britain. It is assumed that the Diving Officer has standard diving manuals and published decompression tables, and information on the conduct of decompression dives. This chapter outlines the present state of knowledge with regard to decompression diving shallower than 50 meters, and is intended to help divers to use decompression procedures in the most intelligent way. This section should be read in addition to standard diving manuals, not as a substitute.

It would appear at first sight a simple matter to detail the variables involved in the decompression phase of a dive and give firm advice about decompression procedures. However, the development of non-invasive methods for the detection of gas phase separation within the body, has greatly increased our awareness of the complexity of decompression. Unfortunately, it also indicates that a good deal of the confident advice given in the past can now be seen to be misguided. Perhaps the best example of this is the detection of bubbles, and even outright decompression sickness, after repeated breath-hold dives (Paulev, 1965). It is essential for everyone involved in diving to be aware of the unpredictability of decompression sickness and to recognize that the risk is present in virtually all diving.

From recent research *it is now apparent that the safety of the final decompression of a dive is dependent upon the conduct of the dive itself*. To understand the basis of this statement, it is necessary to study briefly the stages of a dive.

11.2 The compression phase

As a descent is made, the increased partial pressures of the components of the breathing gas, that is, with compressed air, oxygen and nitrogen, result in more of both gases dissolving in lung tissue and being transferred to the blood. The dissolved gases are then transported by the blood to the body tissues, where they will increase the dissolved gas content or tension. The amount that will dissolve, that is, the dose of nitrogen per unit volume of tissue, will depend not only upon the time at depth, but also upon a considerable number of other variables, including the level of exercise during the dive. Exercise increases cardiac output and reduces circulation time. Tissues, of course, have widely differing levels of blood flow and even within a given area of a single tissue, the blood flow may not be constant. The tissues, themselves, are not homogeneous and may contain zones of differing fat content and therefore differing gas solubilities.

When Haldane (1907) calculated his original air tables, he allowed for the uptake of gases in five different tissues, by a series of exponential curves. He assumed that the release of gas during decompression followed the same profiles. In other words the uptake and off-gassing of a tissue would be symmetrical. His calculations also assumed that a degree of tissue gas supersaturation could be allowed on decompression, without the formation of gas phase, based upon a "no-stop" decompression depth. Haldane and co-workers established this depth for compressed air, from a rather small number of exposures, as being 42 feet (about 13 meters) of sea water. When the partial pressure of oxygen is subtracted from this absolute pressure, the nitrogen partial pressure is 2 ATA. It was therefore argued that if, during decompression, the tissue supersaturation did not exceed a value twice the absolute pressure, then no symptoms would arise. Unfortunately, this argument was later amended to the two to one decompression ratio not being associated with any release of gas from solution (Haldane, 1922).

Two observations now indicate that the method is flawed and, in fairness to Haldane, a study of the original papers shows that he was aware of the limitations of this approach. They are, firstly, the detection of gas by ultrasound during decompression after exposures well within the 'no-stop' decompression limits (Eckenhoff et al. 1986), and secondly, the demonstration of intermittent blood flow within tissues. The separation of gas from solution prevents the accurate computation of gas transfer by the Haldanian method, which, of course, must assume that the gas is all in solution. This phase separation ensures that the rate of gas elimination will always be slower than the rate of uptake. Intermittent perfusion of tissue, that is the sequencing of blood flow, is common in many tissues, but now has been found to occur in connective (including muscle) tissue (Hills, 1979), which is the tissue most likely to be involved in the pain of simple decompression sickness.

Until this information became available, it seemed logical that minimizing the time at maximum depth, and therefore reducing the 'dose' of nitrogen (determined by the product of the partial pressure of nitrogen and a function of time), would minimize the risk of decompression sickness. However, this can be seen to be only partly true, because, if there are a number of significant ascents from the maximum depth during the dive, gas phase will be present before the final decompression. The risk of decompression sickness will then be much greater.

It must always be remembered that, for ethical reasons, the end-point in titrating decompression tables has been joint pain, that is 'Type 1' decompression sickness. However, Hills (1971) has shown than in deep, short duration air dives, serious decompression sickness may develop in the absence of joint pain.

11.3. The decompression phase

A significant ascent is one that exceeds the upward excursion allowed by the partial pressure vacancy created by the metabolic usage of oxygen. This effect, termed the 'oxygen window' by Momsen and Behnke (1938), occurs because the fall in the tissue gas tension of oxygen is not accompanied by an equivalent rise in the carbon dioxide tension.

The gas tension values for air expressed in millimeters of mercury (mm) at normal atmospheric pressure (1ATA) are:

Table 11-1. Arterial and venal gas tension values

IN ARTERIAL BLOOD;		
(P_m = Arterial gas tension)	P_mO_2	= 100
	P_mCO_2	= 40
	P_mN_2	= 573
	P_mH_2O	= 47
Total arterial gas tension		= 760 mm Hg.
IN VENOUS BLOOD;		
(P_v = Venous gas tension)	P_vO_2	= 40
	P_vCO_2	= 45
	P_vN_2	= 537
	P_vH_2O	= 47
Total venous gas tension		= 705 mm Hg.

The difference, 55 mm Hg at 1ATA, has been termed the 'inherent unsaturation' by Hills and LeMessurier (1967), and they have demonstrated the effect experimentally. As the partial pressure of the oxygen in the respired gas is increased, up to an as yet undetermined point, the inherent unsaturation is also increased. For example, at 50 meters breathing compressed air, the partial pressure of oxygen is about 1.2 ATA and the calculated undersaturation is 723 mm Hg. This means that an upward excursion of almost 10 meters is possible without the risk of gas separation. Any further ascent will be accompanied by supersaturation and some gas phase separation. However, this does not mean that the diver will develop decompression sickness. A diver who has gas in a critical tissue, like the spinal cord cord causing paraplegia, may have less gas separated from solution than a diver who has no symptoms. In other words, the absolute amount of gas separated from solution may be relatively unimportant, and a comparitively small amount of gas in a vulnerable site is capable of producing dramatic and permanent disability.

11.4. Standard air decompression

Decompression tables are based on general principles, modified and developed by experience. The only proof of the worth of a procedure is the accumulation of actual diving experience. It is most important that proven procedures are used. As military diving has been a major force in the development of tables, a great deal of data on their performance has been undertaken. In the present chapter comments have been directed to the United States Navy and Royal Navy tables, but it must be remembered that the French

Ministère du Travail (1977) Tables are also widely used. It must be accepted that risk acceptance in military procedures may differ from that regarded as acceptable in civilian life. The following general principles will help to minimize the risk of decompression sickness, but it must be accepted that, for most dives, it is not possible to make a bubble-free ascent in any reasonable time scale. Wherever possible dives should be planned within the 'no-stop' decompression limits.

1. Bottom time must be logged from the start of the descent to the beginning of the ascent and the bottom depth is the maximum depth of the dive.

2. When planning a dive involving work at widely different levels, it should be programmed to start shallow and work downwards. This will slightly increase the nitrogen uptake, but prevents the separation of gas from solution, before the final ascent.

3. If upward ascents must be made during the bottom time, they should be limited, whenever possible, by the decompression allowable within the inherent unsaturation.

4. The time at the first stop is reckoned from the beginning of the ascent to the beginning of the ascent to the second stop.

5. The time at the second and subsequent stops is reckoned from the start of the ascent from the previous stop to the start of the ascent to the next stop.

6. The stopage depths must be as accurate as possible. If there is an underwater structure, then the depths can be marked. If a shot line is used, it must be correctly weighted and accurately marked with a measurement at the diver's chest. Care must be taken to allow for any deviation from the vertical.

7. Many tables do not allow for hard work. When a dive is strenuous, decompress for the next bottom time entry in the tables.

8. The ascent rates used in tables are important and undoubtedly have contributed to the success of a given procedure. The recommended rates of ascent must be used. They depend to some extent on the tables being used:

Table 11-2. Diving table ascent rates. All rates of ascent are for sea water. Detailed instructions are found in table procedures for dealing with deviations from the recommended rates of ascent.

a.	U.S. Navy	60 feet per minute
b.	RN Air Table BR 2806 Table II	20 meters per minute
c.	RNPL/BSAC Air Diving Decompression Table 1975	15 meters per minute
d.	RNPL Metric Air Diving Table 1976	15 meters per minute
e.	French, Ministère du Travail, 1977	15 meters per minute
f.	Canadian Forces Air Diving Tables Tablees and Procedures, 1986	60±10 feet per minute

These rates are to be used from the end of the dive and also for ascents between stops.

9. The maximum depth, when compressed air is being used, should be limited to 50 meters, but there are variations in national legislation that may further limit depth.

Notes on the above. The requirement to log the pressure exposure profile of the diver is important. The maximum depth must be recorded, and the time of start of the ascent. If microprocessor instruments are being used that predict the optimum dive profile, but do not record the actual dive, then the dives should be logged and recorded in the diver's personal log book. Recommendation (2) above introduces concepts that are the opposite of those used in electronic decompression computers presently available. These computers are based on equations that do not allow for gas phase separation caused by shallow ascents preceeding the final decompression. For an irregular profile dive, they therefore compute the minimum total decompression time for a dive that has the deepest part first, followed by a gradual ascent (6.2.19; 10.8). Physiological data indicate that Recommendation (2) above is the safer procedure. Recommendations (4, 5 and 6) require adherence to a known decompression profile, with the result that the diver's final exposure both during gas up-take and gas release is known and recorded. Decompression computers presently available do not record these data, and therefore there is no check on the diver's true nitrogen loading.

11.5. Diving in remote areas

In remote areas dives requiring decompression stops should not be attempted. In exceptional circumstances, where such a decompression dive is planned, special arrangements should be made. Planning must include arrangements for transportation and for conveying a decompression casualty to

a compression chamber. It must be emphasized that pulmonary barotrauma with gas embolism is an ever-present risk, especially with inexperienced divers.

Flight in some pressurized or unpressurized aircraft may exacerbate decompression illness.

Table 11-3. Dive character and compression chamber requirements

Max. operating depth of dive	Operational Conditions	Type of Compression Chamber (Minimum requirement)
1. 0-10m	All	None - but divers must be aware of the nearest chamber.
2. 10-50m	Short duration dives, stops unlikely to exceed 20 minutes.	Within 2 hours' travelling time of a two compartment chamber BIBS* O_2.
3. 10-50m	Stops regularly being used.	Two compartment chamber on site. BIBS* O_2.
4. Surface decompression	All	Two compartment chamber on site. BIBS* O_2.

* Indicates a Built-in-Breathing System

11.6. Post-dive precautions

A diver who has carried out a dive where stops have been used to depths of 50 meters (approximately 165 feet) should remain within one hour's travelling time of a working compression chamber for 12 hours after completion of the dive.

It is advisable that divers in post-decompression periods should carry a card, giving information that they have dived and who to contact in the event of illness.

11.7. Decompression tables

Air diving tables are available from many sources both military and commercial. The majority are based on the Haldanian calculation method, but some now use deeper stoppages employing a more thermodynamic approach. Recently an evaluation of four military tables has been reported (Masurel et al. 1986), for an exposure of 50 minutes at 36 meters. It illustrates that adding more stoppages may not improve the bubble inhibiting character

performance of a table. The situation is complicated by the limitations of the Doppler system in use, which is only capable of detecting fairly large bubbles. The size distribution of the bubbles is a function of the extent of supersaturation induced and the amount of gas released, which is time-dependent. Finally there is the volume change induced by the expansion during the ascent according to Boyle's law (James, 1983). As bubbles formed on a variable profile descent may not be resorbed completely at the maximum depth, but only compressed, prolonging bubble formation until the end of bottom time is important.

When comparing or judging tables it should be borne in mind that no table can possibly prevent decompression sickness entirely, and that the incidence of bends, and the incidence of different types of bends, may be judged to be more or less acceptable depending upon the surface support equipment available, and whether the divers are working in a military or civilian situation. To say that one set of tables is "safer" than another can be a statistical statement of truth, and yet a Diving Officer or Diving Control Board may authorize the "less safe" table, taking into account the other factors involved. The United States, British, and French tables mentioned in this chapter are all widely used and comments on the safest table for any given exposure are based on statistical data.

The British RNPL/BSAC Air Diving Decompression Tables 1975 are very useful and fairly reliable for dives where decompression is less than 31 minutes, otherwise the full RNPL Metric Air Diving Tables, 1976, are probably the safest option.

The U.S. Navy tables are less reliable, particularly on longer and/or deeper dives in excess of 35 minutes.

11.8. Repetitive diving

A repetitive dive is rather arbitrarily defined as a second exposure to pressure, within a period of 16 hours (12 hours in the U.S. Navy) after surfacing from the first dive.

The RNPL Metric Air Diving Tables, 1976, only consider double dives, and decompression on the second dive must be carried out for the bottom depth of the deeper of the two dives. Some allowance is made for the surface interval between dives; the longer the surface interval, the smaller the fraction of the first dive bottom time that has to be added to that of the second dive. The resulting sum is used to calculate the decompression required on the second dive.

With this system, it is clearly advantageous that the longer dive should be done first, since in this way the calculated equivalent bottom time, and hence the decompression time, of the second dive, will be minimized. On the other hand, if one of the dives is a deep dive and the other is a shallow dive, it is more natural to do the deep dive first, because decompression for the first dive will be occurring during the second shallower dive, but not vice versa. Unfortunately though, a heavy decompression penalty must be paid on the second dive using these double dive

rules, if the first dive is short and deep, even for large surface intervals, since decompression must still be carried out as for the depth of the deeper of the two. Another discontinuity in the use of these double dive rules is that, whilst a second dive to a depth of 9 meters or less is not considered a second dive, a dive to 10 meters is, and a heavy decompression penalty accrues if the first dive is deep or long.

The U.S. Navy Tables have been in widespread use, because of the convenience of their repeat dive and surface interval credit tables. Safe decompression on these tables is possible for some combinations of double dives, but in practice it appears that longer and/or deeper and multiple dives, using these tables, are unsafe on a statistical basis for dives working without the support of an on-site recompression chamber.

The RNPL double dive rules are very safe, but have a number of inconvenient discontinuities. The U.S. Navy repetitive tables are more consistent and permit multiple dives, but are less safe for certain dive combinations.

Inevitably in practical diving circumstances arise that carry substantial risks, which nevertheless are allowed by the tables; for example:

1. Multiple dives all within the no-stop limit. As already indicated, multiple breath hold dives can give rise to decompression sickness. The explanation lies in the redistribution of gas released by the first, or subsequent decompressions, in the next dive, that is the next compression and the residual dissolved tissue gas. The redistribution of intravascular bubbles through the trap imposed by the lungs may allow central nervous system decompression sickness to develop.

2. Constant diving or multiple repetitive dives, which again may be allowable under the rules of a procedure, cause a slow build up of tissue inert gas, both in solution and as gas phase and increase the risk of decompression sickness.

3. Long-duration dives, for example up to eight hours at depths down to about 10 meters, may be undertaken in safety, but again care must be taken to limit the extent and number of upward excursions during the dive. Recent research has indicated that, although bubbles were produced after 48 hours exposure to 1.77 ATA, (7.77 meters or 25.5 feet sea water) decompression sickness did not develop (Eckenhoff et al., 1986). Fifteen subjects were used in the experiment. It must be emphasized that when bubbles can be detected, there is always the risk of symptoms and that these experiments were conducted under ideal conditions. It will be almost inevitable that long duration dives will be undertaken using a diving system or habitat (7.4). In such circumstances modest extensions of the no-stop decompression limits may be made using oxygen enrichment. However, oxygen toxicity restricts long term exposures to partial pressures of oxygen less than 0.5 ATA. Decompression may be assisted by oxygen breathing during the final ascent to the surface.

11.9. Surface decompression

This procedure derives from military diving, where heavy salvage work in very cold conditions required the diver to be removed from the water. The technique causes an unacceptably high rate of decompression sickness affecting the nervous system and should be avoided wherever possible. If circumstances dictate the use of surface decompression, the British R.N. Tables are safer than those of the U.S. Navy.

11.10. Diving and altitude

Travel to altitudes in excess of 1000 feet whether by surface transport or aircraft should be avoided for 12 hours post dive. Exercise to the same altitude should be avoided for 24 hours. Diving at altitude is a complex matter but again experience of tables has accumulated in certain countries, like Switzerland, over a period of years and these tables should be consulted for guidance (8.2.1).

11.11. Exercise post-dive

It is well established that exercise releases gas into the circulation following a dive and whenever gas is present there is a risk of decompression sickness. This would indicate that passive transport, for example, a car or bus, carries less risk than a strenuous walk.

11.12. Helium and oxygen mixture diving

Helium is less soluble in the body than nitrogen, so for a given dive using an 80% helium, 20% oxygen mixture, compared to the same dive using compressed air, the body will contain much less helium than nitrogen. This is particularly important in relation to the nervous system, because most of the difference in the lesser quantity of helium is accounted for by the much lower solubility of the helium in fat. The nervous system, especially the spinal cord contains a great deal of structural fat. Helium and oxygen diving is much less likely to give rise to decompression sickness involving the nervous system (Behnke and Yarbrough, 1938; James, 1981).

11.13. Decompression Sickness

The risk of decompression sickness can be minimized, but not eliminated by observing the following principes:

1. All significant reductions in pressure form gas phase, it is not practical to ascend so slowly that gas phase does not form.

2. The greater the reduction in pressure, the larger the amount of gas likely to separate from solution.

3. The risk of problems, that is, both decompression sickness and barotrauma, increases closer to the surface.

4. Decompression tables control the development of symptoms, not necessarily the release of gas.

5. Decompression sickness may develop, even when procedures are followed correctly.

6. No method is available to predict which diver will develop symptoms.

7. Serious symptoms may be much less dramatic in onset than simple decompression sickness.

8. It may not be possible to determine, in the presence of serious symptoms, whether the diver has embolism or decompression sickness.

11.13.1. Classification of decompression sickness

The classical division of decompression sickness into simple (Type 1) and serious (Type 2), originates from the Admiralty report on compressed air illness of 1907 (Haldane, 1907). It is important to recognize that types 1 and 2 do not indicate a progression. There are very adequate reasons for regarding the mechanisms as distinct.

11.13.1.1. Simple decompression sickness: Type 1

Pain at the site of a joint and skin rashes. The pain is localized at the site and the diver is usually able to point to the specific area. It has been found in aviation studies that the local pressure from a blood pressure cuff could relieve the discomfort, if it was used immediately. Additional evidence from X-ray studies in aviators (Webb, et al., 1944) and in animal experiments (James, 1982) have confirmed that gas in tight connective tissue is responsible for the pain.

Pain in other sites is much more likely to be referred pain from serious problems in the nervous system. For example, low back pain associated with girdle discomfort, in a band extending round the body, or pain in the mid-thigh position.

Skin rashes are due to the blockage of capillaries and lymphaie by bubbles and the release of substances that cause the redness and itch to develop. Experience indicates that rashes may be accompanied by nervous system decompression sickness.

11.13.1.2. Serious decompression sickness: Type 2

Acute respiratory distress, the 'chokes', is due to the entrapment of bubbles in the lung and correlates with the bubble count in the pulmonary artery detected by Doppler ultrasound. Severe forms are usually associated with a gross omission of decompression and may lead to sudden death. Milder forms often subside without treatment, but this is no reason not to institute therapy. Abnormal fatigue is often present when the lungs are trapping an excessive number of bubbles. Very often respiratory symptoms are followed by the development of neurological decompression sickness.

The presentation of neurological decompression sickness can involve any nerve function. Because of the need for immediate treatment, it is essential that symptoms involving the nervous system are recognized and urgent advice sought. The presentations can include loss of consciousness, headache, dizziness, vertigo, loss of hearing, disturbances in vision, weakness, paralysis and loss or disturbances of sensation.

Events leading to neurological decompression sickness are controversial, but evidence is emerging to support arterial bubbles, related to the failure of pulmonary entrapment, as the mechanism. The additional risk associated with air diving is likely to be due to the augmentation of bubbles lodging in a tissue with a high nitrogen content. A major problem for the arterial hypothesis has been the apparent absence of a non-diving related nervous system disease associated with microembolism, resulting from failure of pulmonary entrapment. However, there is now substantial evidence indicating that multiple sclerosis is due to this form of microembolism (James, 1982). Most cases of spinal cord decompression sickness will have experienced symptoms referable to the brain. Many of the presentations of decompression sickness, said to be related to the inner ear apparatus, are actually due to problems in either the brain stem or cerebellum. Occasionally symptoms due to brain damage involving cranial nerve pathways persist, as for example, in the eye or balance problems (Leippman, 1981). Research is beginning to confirm that neuro-psychological deficits occur in air divers (Peters et al., 1977).

A major problem with the presentation of neurological decompression sickness is that, apart from the onset of paralysis, the signs and symptoms, both to the diver and his companions, may be insidious and undramatic. Urgent action may appear to be essential when a diver is in severe pain, but this form of decompression sickness is unlikely to be associated with any permanent damage. However, if the treatment of severe neurological decompression sickness is delayed for more than a few minutes, permanent damage may occur (Palmer et al., 1981).

11.14. Therapy in decompression sickness

The treatment of decompression sickness is aimed at reducing or eliminating the amount of gas that has separated from solution and correcting secondary effects like tissue oedema, hypoxia, and shock. It must be emphasized that serious decompression sickness is an extreme emergency and recompression should be undertaken as soon as possible.

There are four established elements and one area, which is controversial.

11.14.1. Recompression

This is the most important measure and should be used as soon as possible, because it produces an immediate reduction in the volume of gas (Boyle's Law). It also creates a concentration gradient for the return of gas into solution (Henry's Law). The former is instantaneous, but the latter takes time. Using the same diluent inert gas as the dive, as, for example, using air recompression therapy for decompression sickness arising in air diving, is not very satisfactory, because the second recompression is reloading the body with the offending nitrogen. This is particularly true of the 6 ATA (165 feet, 50 meters) recompression air tables, where the partial pressure of nitrogen is 4.8 ATA. This has led to the use of pure oxygen or a raised partial pressure of oxygen in treatment and the introduction of helium and oxygen mixtures in therapy.

11.14.2. Oxygen

Following the work of Behnke and Shaw (1937), and an analysis of the failure of the long air tables in the treatment of serious decompression sickness, the U.S. Navy introduced the minimal recompression, oxygen breathing tables in 1965, known as Tables 5 and 6 (Goodman and Workman, 1965). By eliminating a diluent 'inert' gas and increasing the inherent unsaturation, the use of pure oxygen ensures the maximum gradient for the removal of nitrogen. Oxygen relieves localized hypoxia and also, by vasoconstriction, reduces secondary tissue swelling or oedema. However, the absolute pressure used is restricted by oxygen toxicity to 2.8 ATA, and oxygen at this level is implicated in other problems, recognized by the worsening of symptoms noted in the U.S. Navy Manual. It must also be remembered that oxygen can contribute to the gas phase.

11.14.3. Helium and oxygen mixtures

Clearly if the 'depth' of the recompression therapy is restricted by oxygen toxicity, then it would be useful to add a diluent gas other than nitrogen. In commercial diving, helium and oxygen mixtures are generally available and are rapidly becoming standard therapy for compressed air decompression sickness. Following some experimental work in the early 1970's, there were fears that helium would amplify a gas phase containing nitrogen, but this is now known to be untrue. The procedures of the U.S. Navy allow the use of 80% and 20% helium-oxygen mixtures in place of air in their treatment tables. However, it is dangerous when the gasses are the other way round, that is, air should never be used for the therapy of helium-oxygen mixture divers.

11.14.4. Fluid therapy

It is now known that when the micro-bubbles released by decompression are present in blood vessels, they do not act as simple plugs or emboli. The bubble causes an increase in the permeability of the blood vessel wall, which is related to endotheolial factors. This causes a loss of fluid from the circulation, and, under these conditions, red blood cells aggregate, greatly increasing the resistance to flow. The effect is rapidly reversed by the infusion of fluids into the circulation. Cases of severe decompression sickness will always benefit from an intravenous infusion, and the procedure is without hazard. Also an additional benefit derives from the expansion of the circulation by a solution with a relatively low gas content. Incidentally, the importance of fluid balance in preventing or alleviating decompression sickness is such that divers should never start a dive in a state of dehydration. Drinking plenty of water in the period before dives allows fluid balance to be maintained.

11.14.5. Drug therapy

This is a highly complex and controversial area. Only one clear recommendation can be made and it is for high-dose steroids, which are of value in the reduction of blood vessel permeability.

11.15. Recompression tables

The standard air tables should only be used if oxygen is not available. The table of preference for recompression breathing oxygen is U.S. Navy Table 6 (Appendix 3). The air therapy procedures of the U.S. Navy can also be employed using a mixture of 80% helium and 20% oxygen. This is a procedure recommended for serious symptoms, recurrence of symptoms or when the patient has difficulty breathing. Where symptoms are unresolved the patient should, whenever possible, be held at depth and specialized advice obtained.

11.16. Therapy in the absence of a recompression chamber

In some instances when diving, for example, in very remote areas, it will not be possible to transfer the casualty to a recompression facility. The casualty should be given oxygen and fluids, preferably by the intravenous route. Apparatus is now available to deliver oxygen through a demand valve and this should become standard equipment for every diving expedition. The purge button can allow assisted ventilation, which may be life-saving in cases of high spinal cord paralysis. The decision to attempt to evacuate to a recompression chamber, depends upon the nature of the problem. A simple knee bend or skin rashes do not lead to any permanent damage and will resolve without therapy. Some cases of serious decompression sickness resolve spontaneously but given the initial presentation it is not possible to predict which will resolve and which will not. Every effort should be made to obtain recompression therapy for cases involving the nervous system and some useful benefit has been obtained after delays of many hours or even days.

SECTION 12. SITUATIONS NOT COVERED BY THIS CODE OF PRACTICE

The main purpose of the present Code is to provide guidance as to the best and safest practice already used by scientific divers in different countries. The advice is given in a form that should be compatible with differing statutory regimes, and for differing environmental conditions. As far as possible the content is designed to be supplementary to other published manuals and safety codes. It is, of course, impossible to tabulate all the conditions and combinations of conditions that can arise in diving, let alone to anticipate all the complex technical tasks, which may be required of scientific divers in the future. It is therefore extremely important that there should be an approved procedure whereby the best practice for a new situation can be devised and tested as quickly as possible.

Where an institute or project leader finds that the work proposed requires divers to operate in conditions and circumstances not envisaged in this Code and to depart significantly from it, the Diving Officer, Chief Diver, or scientist involved should act as follows:

1. Take into account as far as possible all the recommendations of existing Codes of Practice, including this one.

2. Draft a full set of precise rules for the diving project envisaged, stating new training procedures for personnel, new equipment to be used, safety precautions, the exact routines and procedures to be used at sea in stages of the operation, and in anticipated possible failures, faults or accidents.

3. The project rules should be circulated to personnel involved in the project.

4. If further consultation and advice is required, the project plan and rules should be referred to the Diving Officers at several of the larger establishments listed in Appendix 1. Their advice may be of benefit in improving the plans, especially if divers can be located who have practical experience in the relevant conditions. This is a purely consultative arrangement to enable people to benefit from each others' diving experience.

5. If the proposed diving rules involve breach of statutory Regulations in the country where diving is to take place, application should be made for an exemption to specified clauses of the Regulations. It is reasonable for such exemption to be granted, provided that extra safety systems are introduced to compensate for the departure from normal Regulations.

6. If new project rules for new circumstances or conditions would be of general value to other divers, the Diving Officers concerned are requested to send their recommendations to the Editors of the present Code for inclusion in future editions.

APPENDIX 1. DIRECTORY OF INSTITUTES WITH DIVING PROGRAMS.

This list is not meant to be exhaustive. The organizations on this list are those known to the editors and contributors to operate diving programs with six or more divers on either a permanent or temporary basis. See Appendices 4 and 5 for the establishments of contributors and Section contacts in addition to those shown in this Appendix.

Anti-shark Measures Board, P.O. Box 2, Umhlanga Rocks 4320, South Africa.

Barologia, S.A. Society for Underwater Science, Oceanography Dept. University of Cape Town, PB Rondesbosch 7700, South Africa.

Biological Sciences Dept., Heriot-Watt University, Chamber St. Edinburgh, Scotland, U.K.

British Antarctic Survey, Madingley Road, Cambridge, CB3 OET, England.

Curator of Marine Archaeology, W.A. Museum, Beaufort St., Perth, Western Australia 6000.

Department of Agriculture and Fisheries for Scotland. Marine Laboratory, P.O. Box 101, Victoria Road, Aberdeen AB9 8DB, Scotland, U.K.

Dept. of Oceanography, The University, Southampton, Hants. SO9 5NH. England.

Dept. of Zoology, University College of Swansea, Singleton Park, Swansea, Glam. SA2 8PP. Wales, U.K.

Diving Division, Defence & Civil Institute of Environmental Medicine, 1133 Sheppard Ave. West, P.O. Box 2000, Downsview, Ontario M3M 3B9, Canada.

Fairleigh Dickinson University, St. Croix, U.S. Virgin Islands

Fisheries Research Division, Ministry of Agriculture & Fisheries, P.O. Box 19062, 327 Willis St., Wellington, New Zealand.

(The) Flinders University of South Australia, Bedford Park, South Australia 5042.

Gatty Marine Laboratory, St. Andrew's University, St. Andrews, Fife, Scotland, U.K.

Institute of Biology & Geology, University of Tromsø, P. 6790, 9001 Tromsø, Norway.

Institute of Geological Sciences, West Granton Road, Edinburgh 5, Scotland, U.K.

Institute of Oceanographic Sciences, 1. Wormley, Godalming, Surrey. 2. Bidston, Bidston Observatory, Birkinhead, Cheshire U.K.

Institutt for kontinentalsokkelundersøkelser (Continental Shelf Institute), Norway, Håkon Magnussons gt., Postboks 1883, 7001 Trondheim, Norway.

Israel Oceanographic and limnological Institute, P.O. Box 8040 Haifa 31080, Isreal.

Istituto per lo Studio de la Dinamica delle Grandi Masse, Palazzo Papadoppolo, 1364 San Polo, Venizia, Italy.

Japan Marine Science and Technology Centre, 2-15 Natsushima-Cho, Yokosuka-Shi, 237 Japan.

Laboratorio di Geologia Marina del CNR, Via Zamboni 65, 40127 Bologna, Italy.

Lamont-Doherty Geological Observatory of Columbia University, Palisades, New York 10964, U.S.A.

Lehrstuhl für Erdölolgeologie, Sedimentologie und Meeresgeologie, Technische Universität Clausthal, Leibnizstrasse 10, 3392 Clausthal-Zellerfeld.

MAFF, Fisheries Laboratory, Lowestoft, England.

Marine Biological Asociation U.K., Citadel Hill, Plymouth, Devon, U.K.

Marine Laboratory, Port Erin, Isle of Man.

Marine Science Laboratories, Menai Bridge, Anglesey, Wales, U.K.

National Research Institute for Oceanology, P.O. Box 320, Stellenbosch 7600, South Africa.

NOAA Environmental Research Laboratories, Atlantic Oceanographic and Meteorological Laboratory, Miami, Florida, U.S.A.

Oceanographic Research Institute, 2 West Street, Durban 4001, South Africa.

Port Elizabeth Museum, Humewood, Port Elizabeth 6001, South Africa.

Research Diving Unit, Oceanography Department, University of Cape Town, P.O. Box Rondebosch 7700, South Africa.

School of Biological Sciences, James Cook University, P.O. Box 999, Townsville 4810, Queensland, Australia.

San Diego State University (Department of Zoology) San Diego, California 92182.

Scripps Institution of Oceanography, La Jolla, California 92037, U.S.A.

Sea Fisheries Institute, P.O. Box X2, Roggebaai 8012, South Africa.

Senckenberg Institut, Schleusenstrasse 39a, 2940 Wilhelmshaven, Germany.

S.M.B.A. Dunstaffnage Marine Research Laboratory, P.O. Box 3, Oban, Argyl, Scotland, U.K.

South African Museum, Queen Victoria Street, Cape Town 8000, South Africa.

Station Marine d'Endoume, Rue de la Batterie des Lions, Marseille, 7e, France.

Stazione de Biologia Maritima, Riva 7 Martiri, Venezia, Italy.

Tolkai University, Orido, Shimizu-City, Japan 424.

Underwater Technology Group, Dept. of Mechanical Engineering, North East London Polytechnic, Longbridge Road, Dagenham, Essex RM8 2AS.

University of Bristol (Dep. of Geography), Bristol, England.

University of British Columbia (Diving Operations Office), 155A Auditorium Annex, 1924 West Mall, Vancouver, British Columbia, Canada V6T 1W9.

University of Durham, Dept. of Botany, Science Laboratories, South Road, Durham DH1 3LE.

University of Miami, School of Marine and Atmospheric Sciences, 10 Rickenbacker Causeway, Miami, Florida 33149 U.S.A.

University of Rhode Island, Narragansett, Rhode Island 02882, U.S.A.

University of Port Elizabeth, Zoology Department, P.O. Box 1600, Port Elizabeth 1600, South Africa.

University of Natal, Zoology Department, Durban 4001, South Africa.

Woods Hole Oceanographic Institution, Woods Hole,Massachusetts 02543, U.S.A.

APPENDIX 2. REFERENCES AND SELECTED BIBLIOGRAPHY.

Some of these references include editors notes and contact addresses of some of the less widely available books and pamphlets.

Adolfson, J.A. & Berghage, T. 1974. Perception and Performance Underwater. John Wiley, New York 47100900 8.

Allsopp, W. 1985. Fishery Develpment Experiences Fishing New Books, Farnham, Surrey GU9 7HK England, 160pp.

Altman, G. 1978. La Plongée par l'Image. Fédération Français d'Etudes et de Sports Sous-Marin. 95pp.

American Academy of Underwater Sciences. 1984. Standards for scientific diving certification and operation of scientific diving programs. 47pp.

Anderson, B.G. 1974. Diving equipment and human performance during undersea operations in the High Arctic. In: The Working Diver. Marine Technology Society, Columbus, Ohio, 325-340.

Anonymous. No date. Hydrolab operations manual. National undersea research program. Fairleigh Dickinson University. St. Croix. U.S. Virgin Islands.

Anonymous. 1975. Danger: 'Stingers', Queensland State Center: Queensland Surf Life Saving Association.

Anonymous. 1979. Workshop on coral trout assessment techniques held at Heron Island, 21 April - 4 May 1979. Great Barrier Reef Marine Park Authority, Townsville.

Anonymous. 1979. Workshop on reef fish assessment and monitoring held at Heron Island, 18-28 November 1978. Great Barrier Reef Marine Park Authority, Townsville.

Anonymous. 1985. Cold and the Diver: Prevention, Protection and Performance. A Bibliography of Informative Abstracts. Undersea Medical Society, Bethesda, Maryland. USA.

Appendix D, 1983, Diving Safety Manual. Woods Hole Oceanographic Institution. Massachussetts, USA.

'Aquazepp' 1971. Descriptive leaflet, Aquazepp Manufacturing Company, 8 Munich 25, Steinerstrasse 20a, West Germany.

Armada de Chile. 1983. Reglamento 7-54-/4 de buceo para buzos profesionales.

Australian Institute of Marine Science. 1981. Diving emergency procedures based on and from Townsville (August). 8pp.

Bachrach, A.J. 1985. Cold stress and the scientific diver. In: Mitchell, C.T. (Ed). Diving for Science: Proceedings of the Joint International

Scientific Diving Symposium 1985. LaJolla, California. American Academy of Underwater Sciences, 31-37.

Bachrach, A.J. & Egstrom, G.H. 1986. Stress and Performance in Diving. Best Publishing Company, San Pedro CA 90732.

Baixe . 1984. La médecine blue, oxygène et pression. France Empire, 168pp.

Barsky, S.M. 1986. Protecting yourself agianst the hazards of polluted water diving. Fire Engineering, May 1986, 44-45.

Bassett, B.E. 1979. Results of validation testing of flying after diving schedules. In: Boone, C. (ed). Proceedings of the Eleventh International Conference on Underwater Education. NAUI, Colton, CA. U.S.A.

Bassett, B.E. & Christopherson, S.K. 1974. Calculation of Non-Standard Decompression Schedules. Project of Biology 580L. University of Southern California.

Behnke, A.R. & Shaw, L.A. 1937. The use of oxygen in the treatment of compressed-air illness. Navy Medical Bulletin 35, 61-73.

Behnke, A.R. & Yarbrough, O.D. 1938. Physiologic studies of helium. Navy Medical Bulletin 36,542-548.

Bennett, P.B. & Elliott, D.H. 1975. The Physiology and Medicine of Diving and Compressed Air Work. Second Edition. Baillaière, Tindall. London. 7020 0538X.

Bevan, J. 1985. Professional Divers' Handbook. Submex Ltd. London, 304pp.

Blanchard, J., Mair, J. & Morrison, I. (eds). 1980. Proceedings of the sixth International Scientific symposium of the World Underwater Federation (CMAS). Natural Environment Research Council. 319pp.

Bland, E.L., Donnelly, J.D. & Shumaker, L.A. 1976. Alvin users manual. Woods Hole Oceanographic Institution. Technical Memorandum 3-76

Bolton, M.E., 1980. Scuba diving and fetal well-being: a survey of 208 women. Undersea Biomedical Res. 7, 183-189.

Bourdelet, P. L'anglais tel qu'on le <plonge>. 90pp.

Bright, C.V. 1972. Diving under polar ice. In: The Working Diver. Marine Technology Society. Columbus, Ohio, 145-157.

British Standards Institution. 1966. Recommendations for the care and maintenance of underwater breathing apparatus. Part 1. Compressed air open circuit type. BS 4001. British Standards Institution, London.

British Sub-Aqua Club. 1986. Safe Diving Practices. National Diving Committee BSAC, Booklet, 17pp.

British Sub Aqua Club, Annual Diving Incidents Report(s)

Broner, J-M. 1986. Plongée et Législation. UCPA Niolon, 186pp.

Bühlmann, A.A. Decompression - Decompression Sickness. Best Publishing Company.

Bulletin Officiel du Ministére du Travail. 1977. Mesures particuliéres de protection applicables aux scaphandriers. Special No. 74-48-bis. France. 235pp.

Burgess, R.F. 1976. The Cave Divers , Dodd, Mead & Co. N.Y.

Busby, F. 1976. Manned submersibles. Office of the Oceanographer of the Navy, 764 pp.

Busby Associates. 1981. Undersea vehicle directory. Busby Associates Inc., Virginia, 399pp

Bushman, T.B. & Kroon, D.H. 1984. Cathodic protection of water storage tanks. J. Am. Water Works Assoc. 44-51.

California State University. 1985. Minimal standards for scuba diving certification and operation of scuba diving programs, 49pp.

Canadian Association for Underwater Science. 1985. Standard of Practice for Scientific Diving, 45pp.

Canadian Association for Underwater Science. Byelaws. Canada Corporations Act, Part II, 18pp.

Cardozo, Y., 1985. Cave Diving Florida Style. Scuba Times 5, 26-29.

Cave Diving Group (UK) Training Manual. C.D.G Pulications, Withey House, Withey Close West, Bristol BS9, U.K. 86pp.

CIRIA. 1982. Code of Practice for the Safe use of Electricity Under Water. AODC. 28/30 Little Russell St. London WC1A 2HN.

CMAS. 1984. Proceedings of 7th International Diving Science Symposium, Padova, Italy. 15-18 September 1983, 377pp.

Colantoni, P. 1983. The role of divers in geological study of Adventure Bank. Proceedings of the 7th International Diving Science Symposium or CMAS, 141-148.

Collectif de la Marine Nationale. 1977. La plongée et l'intervention sous la mer. Arthaud.

Construction Industry Research and Information Association Underwater Engineering Group. 1975. The Principles of Safe Diving Practice. Report UR2, Rev. ed. CIRIA-UEG, 6 Storey's Gate, London SW1. 90120899.

Cooke, G. 1969. Diver transport vehicles In: Zanelli, L. (ed). Underwater Swimming, an Advanced Hand Book. Kaye & Ward, 107-121.

Cordingley, J. (ed). 1987. Cave Diving Group Training Manual. British Cave Diving Group. Axeover House, Yarley, Wells, Somerset, BA11 1LR, United Kingdom.

Cory, J. 1985. NAUI, International Conference of Underwater Education. Proceedings, NAUI.

Craik, G.J.S. 1982. Recreational fishing of the Great Barrier Reef. Proc. Fourth Intern. Coral Reef Symposium 1, 47-52.

Cromwell, L. et al. 1973. Biomedical Instrumentation and Measurements. Prentice Hall, Englewood Cliffs, New Jersey. 130771317.

Curtis, A.S.G. 1974. Decompression and narcosis. Scottish Sub-Aqua Club. N.D.C. Paper 35pp.

Davis, J.C. & Hunt, T.K. (eds). Hyperbaric Oxygen Therapy. Best Publishing Co.

Department of Labor. 1982. OSHA is exempting scientific diving from coverage of 29 CFR Part 1910, Subpart T, Commercial Diving Operations, provided that the scientific diving is under the direction and control of a diving program utilizing a diving safety manual and a diving control board meeting certain specified criteria. Federal Register, 47, no. 228, Friday Nov. 26 1982, Rules and Regulations.

De Strobel, F. & Colantoni, P. 1984. Saclantcen code of practice for safe scientific diving. Saclant ASW Research Centre Special Report M-103, 23pp.

De Strobel, F., Akal, T. & Hastrup, O.F. 1984. Saclantcen's use of scuba diving in oceanographic and acoustic research. Saclant ASW Research Centre Memorandum SM-175, 17pp.

Dialog Information Services Inc. Maintains a data base 'SCISEARCH' that contains thousands of diving references. Available through scientific libraries.

Dick, P. & Sisman, D. 1986. Underwater Diving, Vol 1 - Basic Techniques. Pelham, London, 144pp.

Dick, P. & Sisman, D. 1987. Underwater Diving, Vol 2 - Advanced Techniques. Pelham, London, 160pp.

Diver's Reference Dictionary. 1978. Best Publishing Co. POB CA 90732, USA, 131pp.

Drew, E.A., Lythgoe, J.N. & Woods, J.D. (eds). 1976. Underwater Research. Academic Press, London, 430pp.

Done, T.J., Kenchington, R.A. & Zell, L.D. 1982. Rapid large area, reef resource surveys using a manta board. Proc. Fourth Intern. Coral Reef Symposium 1, 299-308.

Earll, R. & Erwin, D. 1979. The species recording scheme - results of the 1977 season. Progress in Underwater Science 4, 105-120.

Eastman, P.F. Advanced First aid afloat. Best Publishing Co.

Eckenhoff, R.G., Osborne, S.F., Parker, J.W. & Bondi, K.R. 1986. Direct ascent from shallow air exposures. Undersea Biomedical Research 13, 305-316.

Edmonds, C. 1975. Dangerous Marine Animals of the Indo-Pacific Region. Wedneil Publications, Melbourne. ISBN 0 909 853 48 7, pp. 235.

Edmonds, C., Lowry, C. & Pennefather, J. 1981. Diving and Subaquatic Medicine. A Diving Medical Centre Publication. 2nd ed. 571pp.

Elsey, D.R. 1986. Practical aspects of research. In: Proceedings of the Second Annual Scientific Diving Symposium. Diving for Science - 1985. Special Publication. Victoria. Canadian Association of Underwater Science.

European Diving Technology Committee. 1977. Guidance Notes for Safe Diving. Netherlands Industrial Council for Oceanology. P.O. Box 215, 97 Schoemakerstraat, Delft, Netherlands.

Exley, S. 1979. Using Underwater Cave maps for Safety. National Speleological Society Cave Diving Section. Pamphlet.

Exley, S. 1981. Basic Cave Diving: A Blueprint for Survival. NSS-CDS, Branford, Florida. 46pp.

Exley, S. & Young, F. 1982. N.S.S. Cave Diving Manual. NSS Cave Diving Section, Branford, Florida.

Fallis, B.W. 1982. Trace metals in sediments and biota from Strathcona Sound, NWT; Nanisivik Marine Monitoring Programme, 1974-1979. Canadian Technical Report. Fisheries and Aquatic Science, 1082.

Fane, F.D. 1959. Skin diving in polar waters. Polar Record 9, no. 62, 433-435.

Farr, M. 1980. The Darkness Beckons. Diadem Books, London.

Fielding, M. & Woods, A. Commercial Diving, References and Operations Handbook, Best Publishing Co.

Flemming, N.C. & Miles, D.L. (eds). 1979. Underwater Association Code of Practice for Scientific Diving. Natural Environment Research Council (Great Britain).

Flemming, N.C. 1980. Safety procedures and Training for the Scientific Diver Technical and Human Aspects of Diving and Diving Safety. Document No 3000/80E. Directorate of Health and Safety. Commission of the European Communities, Luxembourg, 137-176.

Flemming, N.C. 1981. Training and safety for scientific divers. Divetech '81, v. 4. Society for Underwater Technology, London, C. 4, 17-25.

Flemming, N.C. 1984. Divers, submersibles and marine science. Memorial University of Newfoundland. Occasional papers in biology, 118pp.

Flemming, N.C. 1985. Law, scientific diving, and Codes of Practice in different countries. In: Mitchell, C. (ed). Diving for Science 1985. Proceedings of the joint international scientific diving symposium, AAUS-CMAS, La Jolla, California, 1-30.

Flemming, N.C. (ed). 1973. Science Diving International. Proceedings of the 3rd Symposium of the Scientific Committee of the CMAS. British Sub-Aqua Club Special Publication, 282pp.

Forma, M.A. Bulletin de la revue d'Etudes Ligures consacrée à l'archéologie sous-marine en Méditerranée (12 issues) de 1958 to 1982.

Freitag, M. & Woods, A. 1983. Commercial diving reference and operations handbook. John Wiley and Sons, 414pp.

Fructus, X. & Sciarli . 1986. La plongé santé sécurité. EMOM réédition. Fédération Français d'Etudes et de Sports Sous-Marin. 320pp.

Gamba, R. 1972. International Diving Manual; Underwater Speleology. C.M.A.S. Paris, France.

Gamble, J.C. & George, J.D. (eds). 1978. Progress in Underwater Science 4 (New Series). Report of the Underwater Association. Pentech Press, 207pp.

Gamble, J.C. & Shand, J. (eds). 1983. Progress in Underwater Science 9. Report of the Underwater Association, 124pp.

George, J.D., Lythgoe, G.I. & Lythgoe, J.N. 1985. Underwater photography and television for scientists. Underwater Association Special Volumes No. 2. Clarendon Press, London, c. 300pp.

Gerrard, S. 1984. Teaching the NAUI Cave and Cavern Diving Specialty Course Pt. 1 NDA News, Aug. 26-28.

Gerrard, S. 1984. Teaching the NAUI Cave and Cavern Diving Specialty Course Pt. 2, NDA News, Sept. 24-26.

Godden, D.R. & Baddeley, A.D. 1975. Context dependent memory in two natural environments: on land and underwater. British Journal of Psychology 66, 325-333.

Goodman, M.W. & Workman, R.D. 1965. Minimal recompression oxygen breathing approach to the treatment of decompression sickness in divers and aviators. U.S. Navy E.D.U. Research Report 5-65.

Grice, G.D. & Reeve, M.R. (Eds). 1982. Marine Mesocosms. Biological and Chemical Research in Experimental Ecosystems. Springer-Verlag, New York. 430pp.

Grier, C. 1983. Development of an Underwater Vehicle to support Scientific Diving. J. Soc. for Underwater Technology. 9, 4, 4-9.

Grigg, R.W. 1973. Fire under the sea. Oceans Magazine 7(2), 6-11.

Grover, D. 1976. A Decompression Table Procedure for Multi-level Diving. In: Fead, L. (ed). Proceedings of the eigth International Conference on Underwater Education. NAUI. Colton, CA, U.S.A.

Haigh, K.R. 1975. Utilization of electrical power by divers. Trans. Inst. Marine Eng. 87, 133-142

Haldane, J.S. 1907. In: Admiralty report of a committee on deep-water diving. H.M.S.O. London.

Haldane, J.S. 1922. Effects of high atmospheric pressures. Chapter XII, Respiration. Yale University Press.

Halstead, B.W. 1976. Hazardous Marine Life. In: Strauss, R. (ed). Diving Medicine. Grune and Stratton, New York, 227-256.

Halstead, B.W. 1980. Dangerous Marine Animals that bite, sting, and shock or are non-edible (Second Edition). Cornell Maritime Press. Centreville, Maryland, USA, 208pp.

Hamner, W.M. 1975. Underwater observations of blue-water plankton: logistics, techniques and safety procedures for divers at sea. Limnol. Oceanogr. 20, 1045-1051.

Hartley, W.G. 1975. Electrical fishing apparatus and its safety. Fisheries Management 6, 73-77.

Hackett, P. 1980. Mountain Sickness: Prevention, Recognition and Treatment. American Alpine Club.

Haux, G. 1969. Tauchtechnik, Bd. 1, Berlin, Springer Verlag, 269pp.

Haux, G. 1970. Tauchtechnik, Bd. 2, Berlin, Sprinver Verlag, 288pp.

Haux, G. 1982. Subsea Manned Engineering. Best Publishing Co.

Heine, J.N. 1985. Scientific Blue Water Diving. In: Proceedings of AAUS-CMAS joint meeting at La Jolla, California 1985. 54-88.

Hennessey, T.R. 1977. Converting standard air decompression tables for no-stop diving from altitude or habitat. Undersea Biomedical Research, 4, 39-53.

Hicks, J.W. & Hollien, H. 1983. Diver Navigation by Sound. Sea Technology, March, 37-45.

Hills, B.A. 1971. Decompression sickness: a fundamental study of surface excursion diving and the selection of limb bends versus C.N.S. symptoms. Aerospace Medicine 42, 833-836.

Hills, B.A. 1979. Intermittent flow in tendon capillary bundles. Journal of Applied Physiology 46, 696-702.

Hills, B.A. & LeMessurier, D.H. 1967. Unsaturation in living tissue relative to the pressure and composition of inhaled gas and its significance in decompression theory. Clinical Science 36, 185-195.

Hiscock, K. & Baume, A.D. (eds). 1976. Progress in Underwater Science, 2 (New Series). Report of the Underwater Association. Pentech Press, 134pp.

Horner, R.A. & Schrader, G.C. 1982. Relative contributions of ice algae, phytoplankton, and benthic microalgae to primary production in nearshore regions of the Beaufort Sea. Arctic. 35, 485-503.

Hydrolab Operations Staff, 1984. Operations Manual. NOAA's National Undersea Research Program at West Indies Laboratory, Fairleigh Dickinson University, St. Croix, U.S. Virgin Islands

Immel Publishing. Books on Marine Life. Ely House, 37 Dover Street, London W1X 3RB, (tel. 01 4091343)

Israël, M. ( ). Problèmes de Plongée. Fédération Français d'Etudes et de Sports Sous-Marins. 319pp.

James, P.B. 1981. Problem areas in the therapy of neurological decompression sickness. In: James, P.B, McCallum, R.I. & Rawlins, J.S.P. Proceedings VII Annual Congress of the European Undersea Biomedical Society. Cambridge, Norwich Union, 127.

James, P.B. 1982. Evidence for subacute fat embolism as the cause of multiple sclerosis. Lancet i, 380-386.

James, P.B. 1983. The size distribution of gas emboli arising during decompression. In: Proceedings XIII Annual Congress of the European Undersea Biomedical Society. Lübeck Dragerwerk, 481.

Jenkins, W.T. 1976. A Guide to Polar Diving. (AD-A030067) Office of Naval Research, Arlington, Virginia, USA.

Journal of Hyperbaric Medicine.

Keith, D.H. & Frey, D.A. 1979. Saturation diving in nautical archaeology. Archaeology 32, no. 4, 24-34.

Kellogg, W.N. 1961. Porpoises and Sonar. University of Chicago Press, Chicago.

Kindwall, E.P., Hart, G. & Jacobson, J. 1987. Proceedings of the Eigth International Congress on Hyperbaric Medicine. Best Publishing Company, P.O. Box 1987, San Pedro, California 90732, U.S.A.

Leach, J.W.P. 1982. Diver performance on measurement tasks in restricted and zero visibility. Prog. Underwater Sci. 7, 47-51.

Le Guin, F. 1986. Les Scaphandriers du Desert, 350pp.

Lewis, I. & Stace, P. 1980. Cave diving in Australia, Cave Diving Association of Australia, P.O. Box 290, Adelaide, Australia, 175pp.

Lieppman, M.E. 1981. Accomodative and convergence insufficiency after decompression sickness. Archives Ophthalmology 99, 453-456.

Luria, S.M., Kinney, J.A. & Weissman 1967. Estimate of size and distance underwater. American Journal or Psychology 80, 282-286.

MacInnis, J.B. 1972. Arctic diving and the problems of performance. In: Sypmposium Proceedings. The Working Diver. Marine Technology Society. Columbus, Ohio, 159-172.

MacInnis, J.B. 1974. Arctic diving operations. Results of five expeditions. In: Symposium Proceedings. The Working Diver. Marine Technology Society. Columbus, Ohio, 7-28.

Main, J. & Sangster, G.I. 1976. The Aberdeen gear diving techniques. ICES, CM 1976, Document B:20, 9pp.

Main, J. & Sangster, G.I. 1978. A new method for observing fishing gear using a towed net submersible. Progress in Underwater Science (NS) 3, 259-267.

Main, J. & Sangster, G.I. 1981. A study of the fish capture process in a bottom trawl by direct observation from a towed underwater vehicle. Scot. Fish. Res. Rep. 23, 24pp.

Main, J. & Sangster, G.I. 1982. A study of a multi-level bottom trawl for species separation using direct observation techniques. Scot. Fish. Res. Rep. 26, 17 pp.

Main, J. & Sangster, G.I. 1983. TUV-II. A towed wet submersible for use in fishing gear research. Scot. Fish. Res. Rep. 29 19pp.

Main, J. & Sangster, G.I. 1984. Observations on the reactions of fish to fishing gear using a towed net submersible and unterwater TV. Progress in Underwater Science (N9), 9, 99-114.

Main, J. & Sangster, G.I. 1985. Trawling experiments using a 2-level net with a view to minimizing the undersized gadoid by-catch in a Nephrops fishery. Fisheries Research 3, 131-145.

Masters, P.M. & Flemming, N.C. (eds). 1983. Quaternary coastlines and marine archaeology. Academic Press, London and New York, 319pp.

Masurel, G., Guillerm, R. & Marblé, G. 1985. Comparitive study of the effects of four different decompression profiles on the bubble flow in minipigs exposed to the same air dive. In: Susbielle, G. (ed). Proceedings X Congress of the European Undersea Biomedical Society, 365.

Max, M.D. 1982. Logistics, organization and training of temporary staff on short term geological projects. In: J. Shand & J. Lythgoe (eds). Progress in Underwater Science, 7, 21-26.

Mel'nikov, I.A. 1984. Distribution and behavior of the common species of cryopelagic fauna under the drifting Arctic ice. Canadian Transl. Fisheries and Aquatic Sciences 5087, 14pp.

Meusy, J.J. 1979. Le monde sous-marin et son image, photo et cinéma subaquatique. P. Montel.

McLachlan, A., 1983. Sandy Beach Ecology. In: A. McLachlan & T. Erasmus (eds). Sandy Beaches as Ecosystems. Journ. Publ. the Hague, 280-321.

Miles, S. & MacKay, D.E. 1976. Underwater Medicine. 4th edition. Coles. London.

Miller, J.W. & Koblick, I.G. 1984. Living and Working in the Sea. Van Nostrand Reinhold Company, New York.

Ministry of Defense (Navy) 1972. Diving Manual BR 2806. HMSO. London. 117713457.

Mitchell, C.T. (ed). 1985. Diving for Science. . . 85. Proceedings of Joint International Scientific Diving Symposium, La Jolla, California, USA. American Academy of Underwater Sciences, La Jolla, 330pp.

Mole, G. 1979. Underwater Electrical equipment - some guidance on protection against shock. CIRIA Underwater Engineering Group, Report UR14, 79pp.

Mole, G. 1984. Inherently safe underwater electric power. ERA Technology Ltd. Leatherhead (UK). ERATL, Leatherhead, UK 15pp.

Molle ( ) & Philippe ( ). 1985. Enseigner et organiser la plongée sous-marine. Amphora, 590pp.

Molle ( ) & Rey ( ). 1984. Plongée subaquatique. (Includes air diving tables). Fédération Française d'Etudes et de Sports Sous-Marins. Amphora, 77pp.

Momsen, C.B. & Behnke, A.R. 1938. Report on helium-oxygen mixtures for diving. E.D.U. Report, NY5/S94(132) Washington Navy Yard.

Moore, J.G., Phillips, R.L., Grigg, R.W., Peterson, D.W. & Swanson, D.A. 1973. Lava flows into the sea, Kilauea Volcano, Hawaii, 1969-71. Geological Society of America Bulletin 84, 537-546.

Morgan, E. 1982. The Aquatic Ape. Stein and Day, New York.

Murphey, M. The overhead Diving enviornment: standards. (contains an exhaustive reference list). Mitchell, C. (ed). Diving for Science 1985. Proceedings of the joint international scientific wymposium AAUS-CMAS in La Jolla, California.

Murphey, M. 1985. Alternatives to Stage Decompression. In: Gerrard, S. (ed). The Art of Safe Cave Diving. National Association for Cave Diving.

NACD. 1987. The Art of Safe Cave Diving. NACD, P.O. Box 14492, Gainesville, Florida 32604, USA.

Narragansett Bay Campus (University of Rhode Island). 1985. Research Diver's Manual, Draft.

National Joint Health and Safety Committee for the Water Service 1983. Safety in electrical fishing operations. Health and safety guidelines 6, 32pp.

National Speleological Society Cave Diving Manual. NSS Cave Diving Section. A variety of pamphlets. Publications Committee. 10259 Crystal Springs Road. Jacksonville Florida 32221 U.S.A.

NERC Diving Officers Working Group. 1983. Guidance notes for women divers within NERC, pregnancy diving.

Neushal, M. 1961. Diving in Antarctic Waters. Polar Record 10, no 67, 353-357.

NOAA Diving Manual. 1975. [also Second Edition, Miller, J.W. (ed).] National Oceanic and Atmospheric Administration Manned Undersea Science and Technology Office. Superintendant of Documents. U.S. Government Printing Office. Washington, D.C. 20402. U.S.A.

Odum, W.T. 1967. Safety Hazards of Wet Swimmers' Delivery Vehicle Operations. U.S. Navy MDL, IAAA 4th ann. Meeting, Oct. 1967. 6pp.

Ono, H. & O'Reilly, J.P. 1971. Adaptation to underwater distance distortion as a function of different sensory-motor tasks. Human Factors 13, 135-139.

Palmer, R. 1985. The Blue Holes of the Bahamas. Jonathan Cape Ltd. London.

Palmer, A.C., Calder, I.M., McCallum, R.I. & Mastaglia, F.L. 1981. Spinal cord degeneration in a case of "recovered" spinal decompression sickness. British Medical Journal 238, 888.

Paulev, P. 1965. Decompression sickness following repeated breath-hold dives. Journal of Applied Physiology 20, 1028-1031.

'Pegasus'. 1971. Descriptive leaflet, Rebicoff Underwater Products Inc., 245 South West St., Fort Lauderdale, Florida, USA.

Peckham, V. 1964. Year-round Scuba diving in the Antarctic. Polar Record 12, no. 77, 143-146.

Peters, B.H., Levin, H.S. & Kelly, P.J. 1977. Neurologic and psychologic manifestations of decompression illness in divers. Neurology 27, 125-127.

Petroleum Engineering Division of UK Department of Energy and Norwegian Petroleum Directorate. 1984. Draft guidelines for minimum performance requirements and standard unmanned test procedures for underwater breathing apparatus, 20pp.

Platt, H.M. (ed). 1979. Progress in Underwater Science 5. Report of the Underwater Association. Pentech Press, London, 200pp.

Praire, Y. la. 1977. Le nouvel homme et la mer. Menge.

Poulet, G. & Barincour, R. 1985. La Plongée. Féderation Français d'Etudes et de Sports Sous-Marins. 367pp.

Radioisotopes:

Code of Practice for the Protection of Persons Exposed to Ionising Radiations in Research and Teaching. (HMSO) Great Britain.

Radiological Protection in Universities (obtainable from the Association of Commonwealth Universities, 36 Gordon Square, London WC1).

Code of Practice for the Carriage of Radioactive Materials by Road (HMSO) Great Britain.

Rankin, J.H.G., Lanphier, E.N., Stock, M.K. & Anderson, D.F. 1980. Scuba diving in pregnancy. 7th Symposium on Underwater physiology.

Ray, C. & Lavallee, O. 1964. Self-contained Diving Operations in Mcmurdo Sound, Antarctica: Observations of the Sub-ice Environment of the Weddell Seal, Leptonychotes weddelli (Lesson) Zoologica. New York. 49:7, 121-136.

Rebicoff, D. 1968. The Rebicoff-Pegasus Underwater Photographic System Evolution. Design Criteria & Typical Applications in 1967. Proc. Soc. Photo-Optical Inst. Eng. Underwater Photo-Optical Inst. Applications Seminar, San Diego, Calif. Feb. 1968, 91-98.

Reese, E. 1981. Predation on corals by fishes of the family Chaetodontidae: implications for conservation and management of coral reef ecosystems. Bull. Mar. Sci. 31, 594-60

Reports of the U.S.A. National Underwater Accident Center, P.O. Box 68, Kingston, Rhode Island, U.S.A.

Rey, L. 1985. Arctic Underwater Operations: Medical and Operational Aspects of Diving Activities in Arctic Conditions. In: Proceedings of Icedive, 1984. Graham & Trotman Ltd. London.

Rigler, F.H. 1972. Director's review. In: Char Lake Project Annual Report 1971-1972. Canadian Committee International Biological Program.

Rioux, M. 1987. Bibliography on Diving and Diving Safety for a Scientific Diving Program. Document Library, Woods Hole Oceanographic Institution, Massachussetts 02543, U.S.A.

Roy, P. (ed). 1982. Bulletin de 1' Institut Océanographique, Monaco. Numéro Spécial 3.

Roy, P. & Fredj, G. (eds). 1985. Deuxièmes journées d'étude sur la plongée scientifique. Bulletin de 1'Institut Océanographique, Monaco, Numéro Spécial 4, 216pp.

Rutkowski, D. & Ruszala, T. 1980. NOAA Diving Office Test, Evaluation, and Training of the Variable-Volume Dry Suit. National Oceanic and Atmospheric Administration Diving Office. NOAA Technical Report 80-1 Rockville, Maryland, USA.

Shand, J. & George, J.D. (eds). 1982. Progress in Underwater Science 8. Report of the Underwater Association, 84pp.

Shand, J. (ed). 1984. Progress in Underwater Science 10. Report of the Underwater Association, 164pp.

Sharkey, P. & McAniff, J. 1982. Scientific diving fatalities (USA). National Underwater Accident Data Center. P.O. Box 68, Kingston, Rhode Island 02882, USA.

Sharkey, P. 1985. Narragansett Bay Campus Research Diving Manual. University of Rhode Island. Narragansett, Rhode Island 02882, USA.

Shaw, D. 1986. NDC Diving Incidents Report. Diving Officer's conference. British Sub-Aqua Club, London, 11pp.

Shilling, C.W., Werts, M.F. & Schandelmeier, N.R. (eds). 1976. The Underwater Handbook: a guide to physiology and performance for the engineer. John Wiley & Sons, New York, 912pp.

Short, A.D.& Wright, L.D. 1984. Field methods in wave dominated surf zones and nearshore environments. Occasional Papers Memorial

University of Newfoundland. Biology Dept. St. Johns, Newfoundland.

Sisman, D. 1982. The Professional Divers's Handbook. Submex Ltd, London 306pp.

Smith P.F. (ed). 1984. Underwater Photography: Scientific and Engineering Applications [Papers presented at a symposium at Woods Hole, Mass., 21-24 April 1980]. Van Nostrand Reinhold Co. Inc. New York. For Benthos Inc., 422pp.

Smoot, A. & Bentel, C.A. 1971. Development of a shock hazard test procedure for underwater swimming pool light fixtures. Underwriters Electrical Department Bulletin of Research 60. Melville, Long Island, New York.

Somers, L.H. Numerous publications in the Diver Education Series of the Michigan Sea Grant College Program.

Sparks, R. 1984. Scientific Diving Survey Report. Canadian Association for Underwater Science.

'Squid'. 1970. Descriptive leaflet, R.R.A. Bratt, North End Works, Millers Close, Dorchester, Dorset, England.

Somers, L. 1972. Research Diver's Manual. University of Michigan Press, Ann Arbour Michigan.

Stoddart, D.R. & Johannes, R.E. 1978. Coral Reefs: Research Methods. UNESCO Handbook, Paris.

Standards Association of Australia. 1986. Australian Standard for Training and Certification of Divers, Part I - Scuba Diving. (Part of a series of standards) AS2815. First Committee Draft, October 1986.

Stubbs, J & Roberts, D. 1970. The production of air for breathing from oil-lubricated compressors. British Sub Aqua Club Paper 1. London.

Tejada, S. 1985. Safe diving in polluted waters. Environmental Protection Agencey (U.S.A.) March 1985, 28-29.

Thiry, J.P. 1985. Techniques de la Plongee Souterraine (in French). Union Belge de Speleologie, Commission de Plongee Souterraine. rue Royale St-Marie 126, 1030, Bruxelles, Belgium.

Thomas, R. & McKenzie, B. no date. The Diver's Medical Companion. Diving Medical Centre, Royal Australian Navy, Monograph. 184pp.

Thompson, F.E. Diving, cutting and welding in underwater salvage operations. Cornell Maritime Press Inc. Cambridge, Maryland, USA.

Tibika, B. 1982. Médecine de plongée. Masson.

Trent, J.D. & Orzech, J.K. 1984. An investigation of marine snow using a U.S. Navy deep-diving system. In: Divers, submersibles and marine science. Memorial University of Newfoundland Occasional Papers in Biology 9, 35-44.

UNCLOS. 1983. The Law of the Sea, Official Text. Croom Helm, and St. Martin's Press for the United Nations.

Undersea Vehicles Directory 1985. Busby Inc., Arlington VA 22202, USA, 504pp.

Underwater Diving Accident Manual, National Diving Accident Network, Duke University, Durham, North Carolina, U.S.A.

UNESCO. 1972. L'archéologie subaquatique, une discipline naisante.

UNESCO. 1983. Coral reefs, seagrass beds and mangroves: their interaction in the coastal zones of the Caribbean. Report of a workshop held at West Indies Laboratory, St. Croix, U.S. Virgin Islands. UNESCO reports in marine Science. 23, 131pp.

UNESCO. 1984. Comparing coral reef survey methods. Report of a regional UNESCO/UNEP workshop. Phuket Marine Biological Centre, Thailand. UNEXCO reports in marine science. 21, 170pp.

U.S. Navy. 1971. Directory of World-Wide Shore-Based Hyperbaric Chambers. NAVSHIPS 0994-010-4011.4012. U.S. Government Printing Office, Washington, D.C. 20402. U.S.A.

U.S. Navy. 1975. U.S. Navy Diving Manual. Superintendant of Documents, Washington, D.C.

U.S. Navy. 1982. U.S. Navy Air Decompression Table and Recompression Chamber Operator's Handbook. Department of the Navy, Washington, D.C.

U.S. Navy. An evaluation of recompression treatment tables used throught the world by government and industry. Naval Medical Research Institute. Department of the U.S. Navy. Best Publishing Co.

U.S. Navy. 1985. U.S. Navy Diving Manual, Volume 1: Air Diving. NAVSEA 0994-LP-001-9010. Stock No. 008-046-00094-8. U.S. Government Printing Office, Washington, D.C. 20402. U.S.A.

Vibert, R. 1967. Fishing with electricity, its application to biology and management. FAO Fishing Books Ltd. 276pp.

'Wet Submarine Mk III'. 1970. Descriptive leaflet, Havas Electricité, 16 Rue B. Albrecht, Maxine, France.

Walker, P.A. (Ed). 1986. Safety of diving operations. Graham & Trotman, London, 3354pp.

Watanabe, K., Nakajima, Y. & Naito, Y. 1982. Scuba Ice Diving along the coast of east Ongul Island, Antarctica. Antarctic Report (Tokyo) 75, 75-92.

Welch, H.E. & Kalff, J. 1975. Marine metabolism at Resolute Bay, NWT. In: Proceedings Circumpolar Conference on Northern Ecology. National research Council of Canada, Section 11, 69-75.

Welch, H.E. Bergmann, M.A. & Burton, W. (in preparation) Subice drill sucker compared with conventional SIPRE cores for measurement of subice algae biomass. Canadian Journal of Fisheries and Aquatic Sciences.

Wells, J.M. 1984. Equipment innovations cut risks for divers in polluted waters. Sea Technology, December, 1984.

Williamson, J. 1974. Some Australian Marine Stings and Envenomations. Queensland State Center: The Surf Life Saving Assoc. of Australia.

Wolkiewicz, J. 1982. IFUIPS. Use of decompression schedules for the nitrogen-oxygen and the helium-oxygen diver. U.S. Navy experimental diving report, 6-65.

Woods, J.D. 1971. Micro-oceanography. In: J.D. Woods & J.N. Lythgoe (eds). Underwater Science. An introduction to experiments by divers. Oxford Univ. Press.

'Work Horse'. 1970. Unpublished. The Marine Systems Division, The Plessey Co. Ltd., Ilford, Essex, England.

Workman, R.D. 1965. Calculation of Decompression Schedules for the Nitrogen-Oxygen and the Helium-Oxygen Diver. U.S. Navy Experimental Diving Report, 6-65.

'Work Sub'. 1970. Descriptive leaflet, Marine Exploration Ltd., Marex House, High St., Cowes, Isle of Wight, England.

Wright, L.D. & Short, A.D. 1984. Morphodynamics variability of surf zones and beaches: A synthesis. Marine Geol. 56, 93-118.

Youngbluth, M.J. 1983. Manned Submersibles and sophisticated intrumentation: Tools for oceanographic research. Subtech '83. Paper 7.1, 6pp.

Youngbluth, M.J. 1984. Water column ecology: *in situ* observations of marine zooplankton from a manned submersible. In: Divers, submersibles and marine science. Memorial University of Newfoundland Occasional Papers in Biology 9, 45-57.

Zinkowski, N. 1979. Television - the most ignored of diver aids. Underwater Systems Design 1 (5), 33-34.

APPENDIX 3: REFERENCES TO DECOMPRESSION TABLES

Boni, M., Schibil, R., Nussberger, P. & Buhlmann, A.A. 1976. Diving at diminished atmospheric pressure: air decompression tables for different altitudes. Undersea Biomedical Research, 3, 189-204. Undersea Medical Society. Bethesda, Maryland. U.S.A.

BSAC-RNPL. 1987. Metric Decompression Table. BSAC Diving Manual 'Sport Diving', 110.

Bulletin Officiel du Ministère du Travail. 1977. Fasicule Special No 74-48-bis. Mésures particulières de protéction applicables aux scaphandriers. France, 235pp.

Construction Industry Research and Information Association Underwater Engineering Group. 1976. UEG-RNPL Metric Air Diving Tables. Report UR7. CIRIA-UEG. 6 Storey's Gate. London. SW1

DCIEM (Canada). 1984. Short Standard Air Decompression Tables (metres). Defence and Civil Institute of Environmental Medicine. 1133 Sheppard Ave. W., P.O. Box 2000, Downsview, Ontario, Canada M3M 3B9.

Ministry of Defense, Navy. 1972. Diving Manual BR2806 HMSO London, 1177 & 3457.

NOAA Diving Manual. 1975. [also Second Edition, Miller, J.W. (ed).] National Oceanic and Atmospheric Administration Manned Undersea Science and Technology Office. Superintendant of Documents. U.S. Government Printing Office. Washington, D.C. 20402. U.S.A.

RNPL Table. See Construction Industry entry.

Standards Association of Australia. Draft Australian Standard A.S. 2815. Scuba Air Diving, Commercial and Professional.

U.S. Navy. Standard Air-Decompression Table. Best Bookbinders. 23005 South Avalon Boulevard. Garson, California 90745. U.S.A.

U.S. Navy. 1985. U.S. Navy Diving Manual, Volume 1: Air Diving. NAVSEA 0994-LP-001-9010. Stock No. 008-046-00094-8. U.S. Government Printing Office, Washington, D.C. 20402. U.S.A.

APPENDIX 4. ADDRESSES OF CONTRIBUTORS (and SECTION CONTACTS)

Bachrach, A. Naval Medical Research Institute, Bethesda, Maryland 20014, U.S.A. (8.2.2.).

Brokman, G. Israel Oceanographic Institute, Shikmona, Haifa, Israel (8.2.16; 8.2.23.).

Cavaleri, L. CNR, Istituto per lo Studio de la, Dinamica delle, Grandi Masse, Palazzo Papadoppolo, 1364 San Polo, Venezia, Italy (8.3.11).

Chapman, J. DAFS, Marine Laboratory, P.O. Box 101, Victoria Road, Aberdeen, Scotland, U.K. (8.3.1).

Chivers, I. R.V.S. NERC, No. 1 Dock, Barry, South Glamorgan, DF6 5UZ, Wales, UK (10.4).

Colantoni, P. Instituto di Geologia Marina, CNRS Via Zamboni 65, 40121, Bologna, Italy (7.7.).

Corry, J.A. National Association for Search and Rescue, Headquarters, P.O. Box 50178, Washington D.C. 20004, U.S.A. (6, 7.6.).

Dawson, H. Fresh Water Biological Association, River Laboratory, East Stoke, Wareham, Dorset BH20 6BB (8.3.19).

Dinsmore, D. NOAA National Undersea Research Program 601 South College Road, Wilmington, North Carolina 28403, U.S.A. (7).

Edwards, A., Dove Marine Laboratory, Callercoats, Tyne & Wear N.E., 30 4PZ, U.K. (8.2.6.).

Eldredge, L.G., University of Guam, Marine Laboratory, UOG Station, Mangilao, Guam 96913, Mariana Islands. (8.2.5.).

Flemming, N.C. Institute of Oceanographic Sciences, Wormley, Godalming, Surrey, England

Fraelich, R. Miami Seaquarium, 4400 Rickenbacker Causeway, Miami, Florida, U.S.A. (8.3.20).

Gamble, J. DAFS, Marine Laboratory, P.O. Box 101, Victoria Road, Aberdeen, Scotland, U.K. (8.3.1.)

Grier, C. S.M.B.A. Dunstaffnage Marine Labratory, P.O. Box 3, Oban, Argyll, PA34 4AD, Scotland, UK (10.2).

Grigg, R.W. Hawaii Institute of Marine Biology, P.O. Box 1346, Coconut Island, Kaneohe, Hawaii 96744, U.S.A. (8.2.28.).

Hecht, A. Israel Oceanographic Institute, Shikmona, Haifa, Israel (8.2.16.; 8.2.23.).

Heine, J. Moss Landing Marine Laboratories, P.O. Box 450, Moss Landing, California 95039, U.S.A. (8.2.4.).

James, P.B. Wolfson Institute of Occupational Health, Medical School, Ninewells, Dundee DD1 9SY, Scotland, Great Britain (11).

Lang, Michael, NAUI, Dept. of Zoology, San Diego State University, San Diego, California 92182, USA. (3, 4).

Leach, J. 43 Pendle Street, Skipton, North Yorkshire BD23 1SN, England (6.2.17.; 8.2.9.).

Livingston, Mary, Water and Soil Direrectorate, Ministry of Works and Development, Wellington, New Zealand (8.3.8.).

Lockyer, C. Sea Mammals Research Institute, British Antarctic Survey, High Cross, Madingly Road, Cambridge CB3 0ET, England (4.2.7.)

Luttrell, K.S. Department of Physics, University of Michigan, Ann Arbor, MI 48109, U.S.A. (8.3.15.).

Madin, L. Woods Hole Oceanographic Institute, Masachussetts 02543, U.S.A.

Maine, J. DAFS, Marine Laboratory, P.O. Box 101, Victoria Road, Aberdeen, Scotland, UK (8.3.5.; 10.1.).

Max, M.D. Geological Survey of Ireland, Beggars Bush, Haddington Road, Dublin 2, Ireland. Now at: Naval Research Laboratory, Acoustics Division, Washington D.C. 20375, U.S.A.

Melamed, Y. Director, Isreal Oceanographic and Limnological Institute, P.O. Box 8040, Haifa 31080, Israel. (11).

Moosleitner, H. Zoologische Institüt der Universität, Akademiestrasse 26, A 5020, Salzburg, Austria. (2.2.).

Murphey, M. College off Physical Education, Health & Recreation, University of Florida, Gainsville, Florida 32611, U.S.A. (8.2.18.; 8.2.19.).

Ogden, J. West Indies Laboratory, Fairleigh Dickinson University, Teague Bay, Christiansted, St. Croix, United States Virgin Islands 00820 (7.4.).

Palmer, R. Department of Geography, University of Bristol, Bristol, England. (8.2.19.)

Peters, R. Institute of Oceanographic Sciences, Brook Road, Wormley, Godalming, Surrey, GU8 5UB, England (8.3.2.).

Poole, F. National Director of Coaching, 7 Tobin Place, Holder, 2611 A.C.T., Australia.

Rayner, R. 79 Deansfield, Cricklade, Nr. Swindon, Wiltshire, SN6 6BW, England (8.2.5.).

Redig, B. Hydrax A.B., Amerikahuset, P.O. Box 4034, S-40040, Göteborg, Sweden. (2.2.).

Reed, J.K. Harbour Branch Foundation Inc., Link Port, RR1 Box 196, Fort Pierce, Florida, 33450, U.S.A. (7.5.).

Roverud, H. Hans Tanksgate 10, 5000 Bergen, Norway (2.2.; 8.2.2.).

Saenger, P. Northern River College, P.O. Box 157, Lismore, New South Wales 2480, Australia (8.2.6.)

de Sanctis, V. Via Belaria 50, 51100 Pistoia, Italy. (6.2.19).

Sangster, G.I. DAFS, Marine Laboratory, P.O. Box 101, Victoria Road, Aberdeen, Scotand, U.K. (8.3.5.).

Sela, R. Israel Oceanographic & Limnological Institute, Shikmona, Haifa, Israel (8.2.16.; 8.2.23.).

Sharkey, P. The University of Rhode Island Graduate School of Oceanography, Narragansett Bay Campus, Narragansett, Rhode Island 02882-1197, U.S.A. (3, 4.4, 4.5, 4.6, 4.9, 5, 8.2.3, 8.2.4.).

Short, A. Coastal Studies Unit, Department of Geography, University of Sydney, Sydney, NSW 2006, Australia (8.2.7.)

Somers, L.H. Michigan Sea Grant College Programme, University of Michigan, Ann Arbour, Michigan 48109, U.S.A. (6.).

Sparks, R. University of British Columbia, UBC Diving Operations Office, 155A Auditorium Annex, 1924 West Mall, Vancouver, B.C., Canada V6 1W9 (4).

Stanton, G. Research Diving Cordinator Academic Diving Program, Room 10, Montgomery Gym, Florida State University, Talahassee, Florida 32306, U.S.A. (8.2.3.).

Swanberg, N. Lamont-Doherty Geological Observatory, Columbia University, Palisades, New York 10964, U.S.A. (8.2.4.).

Taylor, M.E.V. P.O. Box 12183, Wellington North, New Zealand (8.3.6.).

Townsend, B. Fisheries & Oceans Freshwater Institute, 501 University, Winnipeg, Manitoba, Canada R3T 1N6 (8.2.2; 8.2.3.).

Udell, M. Israel Oceanographic and Limnological Institute, Shikmona,Haifa, Israel (8.2.16.; 8.2.23.)

Vicente, N. Centre d'Etudes de Resources Animales Marines, (CERAM), Faculté des Sciences, St. Jerome, 13013, Marseille, France (8.3.10.).

van Vlimmeren, H. Pr. Mauritslaan 95, 2582 LP Den Haag, the Netherlands. (2.2.).

White, M. British Antarctic Survey, Madingly Rise, Cambridge University, Cambridge, England (8.2.14.).

Youngbluth, M.J. Harbour Branch Foundation Inc. Link Port RRI Box 196 Fort Pierce, Florida 33450, U.S.A. (8.2.4.).

Zoutendyk, P. Department of Oceanography, University of Cape Town, Rondebosch 7700, Cape, South Africa (8.2.10.; 8.2.11.; 8.2.12.; 8.2.15.).

APPENDIX 5. SECTION CONTACTS.

This list is not meant to be exhaustive. These individuals are those known to the editors as having contributed broadly to diving organization and the writing of manuals and codes in their countries. The number in brackets refers to the section in which the contact has specific expertise within a broad area of experience.

Aarafjord, F., 1/5 Miljoplan, 1 322 Hoevik, Norway (8.2.2; 8.2.3.).

Auffret, A. FFESSM, 24 Quai Rive Neuve, 13007 Marseille, France.

Bax, A., Fort Bovisand Underwater Centre, Fort Bovisand, Plymouth, Devon PL9 0AB, England (4).

Bonifay, E., Department of Quaternary Science, University of Marseille-Luminy, Marseille, France (8.2.19.)

Dorfstätter, Ingo, Submarine Engineering Systems Ltd., RAM Energy International, 19 Graham Road, Clayton South, 3169, Australia (8.3.).

Earll, R.C., Candle Cottage, Kempley, Gloucestershire, England.

Egstrom, G., Department of Kinesiology, University of Southern California, Hilgard 405, (Los Angeles) California, U.S.A.

Egloff, L.V., P.O. Box 191, Cozumel, Quintana Roo, Mexico 77600.

Flemming, B., Senckenberg Institut, Schleusenstrasse 39a, 2940, Wilhelmshaven, Federal Republic of Germany.

Fredj, G., Department of Biological Oceanography, University of Nice, France.

Gavarry, P. Institut National de Plongée Professionnel, Port de Pointe-Rouge, Entrée no. 3, 13008 Marseille, France.

Given, R., University of Southern California Marine Science Centre, P.O. Box 398, Avalon, California 90704, U.S.A.

Grey, S. "Roxboro", Coliemore Harbour, Dalkey, County Dublin, Ireland.

Heydorn, A., National Research Institute for Oceanology, P.O. Box 320, Stellenbosch, South Africa.

Hillis-Colinvaux, L., Department of Zoology, Ohio State University, 484 W. 12th Avenue, Cloumb, Ohio 43210, U.S.A.

Kunihiro, S., Japan Marine Science and Technology Centre, 2-15 Natsushima-Cho, Yokosuka-Shi, Japan 237.

Lunar, Pilar, Museo Nacional de Antropologia, Depto. de Arqueologia Subacuatica, Reforma y Grandi, Mexico D.F., Mexico.

Manahan, D. Marine Biology Section, Department of Biology, University of Southern California, Los Angeles, California 900089-0371.

McAniff, J., National Underwater Accident Data Center, University of Rhode Island, P.O. Box 68, Kingston, Rhode Island 02881, U.S.A.

Mendez, G.R., Corales Vivos A.C., Calle 5 sur# 37, Sr. Miguel de Cozumel, Quintano Roo, Mexico.

Miles, D.L., Hydrogeology Unit, Institute of Geological Sciences, Maclean Building, Crowmarsh, Gifford, Wallingford, Oxon, England. (8.3).

Mørk, A. Continental Shelf Institute, Norway, Håkon Magnussons gt. 1B, Postboks 1883, 7001, Trondheim, Norway (8.2.3.).

Mozai, T., Tokai University, Orido, Shimizu-City, Japan 424.

Müller, K., University of Clausthal, Scientific Diving Team, Leibnizstr. 16, D-3392 Clausthal-Zellerfeld, Federal Republic of Germany.

Rioux, T.M. Diving Officer, Woods Hole Oceanographic Institution, Woods Hole, Masachussetts 02543, U.S.A.

Ryan, P. Department of Geology, University College Galway, Galway, Ireland.

Somers, Lee H., Michigan Sea Grant College Program, University of Michigan, Ann Arbor, Michigan 48109, U.S.A. (6).

Stefanon, Antonio, Stazione de Biologia Maritima, Riva 7 Martiri, Venezia, Italy.

Stewart, J.R. Diving Officer, Scripps Institute of Oceanography, La Jolla, Californian 92093, U.S.A.

Sylven, A., Swedish Sportdiving Federation, Idrottens Hus, S-12387 Farsta, Sweden.

Touloumdjian, Mr. Federation Français d'Etudes et de Sports Sous-Marins, 24 Quai de Rive Neuve, Marseille 13007, France (8.2.19).

Walsh, British Antarctic Survey, High Cross, Madingley Road, Cambridge, CB3 0ET, U.K. (8.2.3.).

Waterman, S., 16 Hunter Road, Princeton, New Jersey, U.S.A. (8.2.14.).

Wefer, G. Geologisch-Palaeontologisches Institut, Universitat Kiel, Oldhausenstrasse 40-60, D-2300 Kiel, Federal Republic of Germany.

Wells, M., NOAA Diving Director, Rockville, Maryland, U.S.A. (8.3.7; 8.3.8; 8.3.9.).

Wolkiewiez, J., Service de Medecine Hyperbare, Hospital Pasteur, 30 Avenue de la Voie Romaine, 6000 Nice, France (11).

Vaissiers, R., Musée Oceanographique Monaco.

van der Land, J., Rijksmuseum van Natuurlijke Historie, P.O. Box 2300, R.A. Leiden, Netherlands.

von der Borth, C.C., Professor of Earth Sciences, The Flinders University of South Australia, Bedford Park, South Australia 5042.

APPENDIX 6. ACCIDENT REPORTING FORMS

The following forms are examples of existing documents prepared for use in the United States and Britain. There is no internationally agreed form currently in use. Individual institutes may have their own forms that are based on local practice and legal requirements. The information required for medical, institutional, and possible legal purposes should be no less than that asked for in these examples.

In case of accident: The accident reporting form that is certified by the Diving Control Board under whose auspices the diving is taking place, should be completed by witnesses with regard to:

1. Each witness should complete and submit his/her report separately. Please make no attmept to co-ordinate reports.

2. Complete only those sections of which you have knowledge. It is not necessary to fill in all sections.

3. Please be as complete as possible with the knowledge you have.

4. If you have any additional knowledge pertinent to the accident that may not easily fit into one of the questions, please indicate this in writing.

5. Please indicate position of the victim and condition of all equipment you observed.

6. Do not remove any equipment from the scene of the accident. If it is necessary to remove the tank and regulator, please carefully check position and type of straps and releases. Close all the valves and note the number of turns necessary to do so.

7. Each person taking any action in a fatal accident should ensure that details (in writing) of the action taken accompanies the bodies or equipment (as applicable), and that a separate written report of such action is compiled. This applies to any and all action, e.g. unbuckling of a strap, turning air on or off, position of reserve valve, removing any item of equipment, etc. Each fact is potentially important.

8. It is especially important that all relevant information accompany the victim of a non-fatal accident. This information should be in writing and state the coditions of the accident, types of equipment used, depth and duration of use, instances of mouth-to-mouth resuscitation and external cardiac massage. Information of diet, rest, alcohol, and medications within the 24 hours prior to the accident should also be included.

9. Complete procedures dealing with the reporting of accidents to comply with any legal requirements.

EXAMPLE 1

CASE CODE _____

NATIONAL DIVING ACCIDENT NETWORK
DUKE UNIVERSITY MEDICAL CENTER 919-684-8111

INCIDENT DETAILS

For Office Use Only

DATE & TIME OF INCIDENT _____ (day/mo/yr) _____ (local time)

LOCATION OF INCIDENT _____ (body of water) (fresh/salt)

NEAREST CITY OR ISLAND _____ STATE _____

DIVE PROFILES FOR ALL DIVES IN PREVIOUS 24 HRS

DATE	TIME	DEPTH	BOTTOM TIME	DECOMPRESSION

DIVE ACTIVITY (CHECK ALL THAT APPLY)

___ Recreational
___ Occupational/Commercial
___ Under Instruction
___ Altitude Diving
___ Research Diving
___ Cave
___ Night
___ Instructing
___ Wreck
___ Spearfishing
___ Photography
___ Resort Diving
___ Club Diving
___ Search/Rescue
___ Other (Explain)

ENVIRONMENTAL FACTORS

___ °C Air Temp ___ °F
___ °C Water Temp ___ °F
___ Visibility (Ft)
___ Sure Entry (Yes/No)
___ Wave Height (Ft)
_____ Bottom Type (Mud, Coral, etc.)
Current None/Moderate/Strong
_____ Weather
_____ Kelp Present (Yes/No)
_____ Entanglement (Yes/No) (Explain Below)

Were These or Other Environmental Factors Contributory to the Accident? Yes/No Explain _____

_____

EQUIPMENT USED

___ Depth Gauge
___ Watch
___ Buoyancy Comp
___ Tools
___ Decompression Meter
___ Tank Pressure Gauge
___ Wet Suit
___ Dry Suit
___ Scuba
___ Hookah
___ Surface Supply
___ Other

Was Equipment a Factor? YES/NO Explain _____

_____

ENTRY

___ Boat
___ Shore
___ Other

BUDDY

___ One
___ Tended
___ Group
___ None

BREATHING GAS

___ Air
___ Nitrox
___ Heliox
___ Other

I UNDERSTAND THAT THE INFORMATION IN THIS FORM WILL BE USED IN A NATIONAL SCIENTIFIC REGISTRY, BUT THAT THE IDENTIFYING INFORMATION WILL BE KEPT CONFIDENTIAL UNLESS I AUTHORIZE ITS RELEASE IN WRITING.

SIGNED _____

WITNESS _____ DATE _____

SPECIFIC FACTORS — For Office Use Only

___ Hours of Sleep in 48 Hrs. Before Dive . . .

___ Time of Last Meal and Size: Small _____ Medium _____ Large _____ . . . .

___ Time of Last Alcoholic Drink & Amount in 24 Hrs Predive _____ . . . . . .

CHECK ALL OF THE FOLLOWING CONDITIONS EXPERIENCED IN THE LAST 48 HRS

___ Injuries	___ Hangover	___ Sea Sickness	. . . . .
___ Nausea	___ Emotional Distress	___ Headaches	. . . . .
___ Dizziness	___ Unusual Exertion	___ Fatigue	. . . . .

Other _____ . .

_____

NOTE WHICH SYMPTOMS AND THE LENGTH OF TIME AFTER THE DIVE THAT YOU EXPERIENCED YOUR SYMPTOMS BELOW.

TIME AFTER DIVE (Hours)	TIME AFTER DIVE (Hours)	
___ Pain, Where _____	___ Nausea	. . . . .
___ Pain, Where _____	___ Dizzy	. . . .
___ Pain, Where _____	___ Itching	. .
___ Numbness, Where _____	___ Aches	. . . . .
___ Numbness, Where _____	___ Faint	. . . .
___ Numbness, Where _____	___ Headache	. .
___ Extreme Fatigue	___ Other	. . . .
___ Ringing Ears	Describe _____	. .
___ Difficulty Breathing	_____	. .
___ Chest Pain	_____	. .
___ Extreme Cold	_____	. .
___ Visual Symptoms		. .

INDICATE ALL DRUGS TAKEN REGULARLY (MORE THAN 3 TIMES A WEEK) OR TAKEN WITHIN THE LAST 24 HRS PRIOR TO INCIDENT.

___ Aspirin	___ Antihypertensives	. . . .
___ Other Pain Relievers	___ Birth Control Pills	. . . .
___ Insulin or Related	___ Other, List (Prescription & Non-prescription)	. . . .
___ Diet Pills	_____	. .
___ Decongestants	_____	. .
___ Antihistamines	_____	. .

FIRST AID ADMINISTERED

___ Aspirin	___ Head Down Left Side Position	. . . .
___ Oral Fluids	___ In Water Recompression	. . . .
___ Intravenous Fluids	___ Medications (Describe)	. . . .
___ No First Aid	_____	. .
___ Alcohol	_____	. .

DIVE TRAINING (✓) — For Office Use Only

	YEAR	ORGANIZATION	
( ) None			. .
( ) Basic & Open Water	_____	_____	. .
( ) Advanced Diver	_____	_____	. .
( ) Asst. Instructor/Instructor	_____	_____	. .
( ) Military	_____	_____	. .
( ) Police/Rescue	_____	_____	. .
( ) Commercial, School _____		Year _____	. .
Course _____			
School _____		Year _____	
Course _____			
School _____		Year _____	
Course _____			
( ) Other _____			. .

DIVING EXPERIENCE (✓) . .

( ) Snorkel Only	Years _____		. .
( ) Scuba Sport	Years _____	Est. Hrs. _____	. .
( ) Scuba Research	Years _____	Est. Hrs. _____	. .
( ) Commercial Scuba	Years _____	Est. Hrs. _____	. .
( ) Commercial Hose	Years _____	Est. Hrs. _____	. .
( ) Commercial Sat	Years _____	Est. Hrs. _____	. .
( ) Mixed Gas	Years _____	Est. Hrs. _____	. .
( ) Police/Rescue	Years _____	Est. Hrs. _____	. .
( ) Military	Years _____	Est. Hrs. _____	. .
( ) Other (Describe)	Years _____	Est. Hrs. _____	. .

DIVING ACTIVITY (✓)

How Active in Past 3 Years - . .

( ) (Less Than 10 Times a Year)

( ) (10 to 50 Times a Year)

( ) (More Than 50 Times a Year)

HAVE YOU EVER HAD A PREVIOUS DIVING RELATED ACCIDENT? YES/NO . .

If YES, Date _____ Type _____ Depth _____

Dive Type _____

Symptoms _____

_____

Treatment _____

_____

Residual Deficits _____

_____

_____

Where and by Whom Treated _____

_____

MEDICAL HISTORY

For Office Use Only

HAVE YOU HAD ANY OF THE FOLLOWING (Circle Correct Answer)

Ear Infections	Yes/No/Don't Know	High Blood Pressure	Yes/No/Don't Know	. . . .
Difficulty Clearing Ears	Yes/No/Don't Know	Rheumatic Fever	Yes/No/Don't Know	. . . .
Other Ear Problems	Yes/No/Don't Know	Heart Disease	Yes/No/Don't Know	. . . .
Visual Problems	Yes/No/Don't Know	Poor Circulation	Yes/No/Don't Know	. . . .
Tuberculosis	Yes/No/Don't Know	Sickle Cell	Yes/No/Don't Know	. . . .
Pneumonia	Yes/No/Don't Know	Blood Clotting Problems	Yes/No/Don't Know	. . . .
Bronchitis	Yes/No/Don't Know	Hepatitis	Yes/No/Don't Know	. . . .
Pneumothorax	Yes/No/Don't Know	Cirrhosis	Yes/No/Don't Know	. . . .
Asthma	Yes/No/Don't Know	Liver Disease	Yes/No/Don't Know	. . . .
Hay Fever	Yes/No/Don't Know	Kidney or Bladder Trouble	Yes/No/Don't Know	. . . .
Spitting Up Blood	Yes/No/Don't Know	Diabetes or Sugar in Urine	Yes/No/Don't Know	. . . .
Other Lung Problems	Yes/No/Don't Know	Hypoglycemia	Yes/No/Don't Know	. . . .
Ulcers	yes/No/Don't Know	Broken Bones	Yes/No/Don't Know	. . . .
Bowel Problems	Yes/No/Don't Know	Back Trouble	Yes/No/Don't Know	. . . .
Rectal Bleeding	Yes/No/Don't Know	Skin Diseases	Yes/No/Don't Know	. . . .
Headaches	Yes/No/Don't Know	Joint Diseases	Yes/No/Don't Know	. . . .
Seizures	Yes/No/Don't Know			. .
Head Injuries	Yes/No/Don't Know			. .
Psychiatric Problems	Yes/No/Don't Know			. .
Smoker	Yes/No/Don't Know	Less Than 1 Pk/Day _____		. .
		More Than 1 Pk/Day _____		

Explanatory Remarks _____

_____

_____

_____

Date of Last Chest X-ray _____ (Yr) (Mo) Normal/Abnormal . . . . . .

Date of Last Bone & Joint X-ray _____ (Yr) (Mo) Normal/Abnormal . . . . . .

WOMEN ONLY

When was Your Last Period _____ Mo/Day/Yr . . . . . .

Have You Ever Been Pregnant? Yes/No . .

Have You Dived When Pregnant? Yes/No . .

Are You Pregnant Now? Yes/No . .

Current Medications for Menstrual Symptoms Yes/No List: _____

Give Year and Date of Last Medical Exam _____

By Whom _____ Qualifications _____

City _____ State _____

Why _____

Was This a Diving Medical Physical? Yes/No

Significant Findings _____

_____

_____

_____

FOR PATIENT

DESCRIBE THE INCIDENT IN DETAIL IN YOUR OWN WORDS INCLUDING ANY INJURIES OR EVENTS THAT LED TO THE INCIDENT. INCLUDE DETAILS OF WHAT YOU FELT OR DID UP TO THE TIME YOU CAME UNDER THE CARE OF A DIVING PHYSICIAN OR HOSPITAL.

EXAMPLE 2

British Sub-Aqua Club
Incident/Accident Report Form

Organising Club/Branch			
Location			
Date	Time	Temperature	Weather
Water/Sea conditions		Max. Depth	Bottom
Tide/Wind	Surface Visibility	Underwater Visibility	
Purpose of dive			
Safety cover and safety precautions			

Diver directly involved

NAME	MEMBERSHIP NO.	AGE	DIVING QUALIFICATIONS
Physical condition, recently and on day of incident. Indicate any physical incapacity.			
Club/Branch			

Equipment. Indicate type, model and condition before and after dive.
Also amount of air in cylinders and weight on belt before and after dive.

	BEFORE DIVE:	AFTER DIVE:
Mask		
Fins		
Snorkel		
Life Jacket		
Weight belt		
Protective clothing		
Cylinders		
Demand Valve		
Harness		
Instruments		

In the event of decompression having been carried out list stops made at:

First Dive	10m	5m	Total ascent time
Second Dive	10m	5m	Total ascent time
Particulars of any dives in the previous 24 hours.			

British Sub-Aqua Club
Incident/Accident Report Form

Details of incident and any action taken: (Use another sheet of paper if this space is too small).

Please submit reports by diver's partner(s), dive leader, dive marshal and any other witnesses together with a summary of the incident leading to the accident. Copies of statements given to the police or other authorities should also be included. Please enclose any press cuttings, inquest report etc.

Report submitted by:	
Name	
Address	
Date	

241

EXAMPLE 3

UNDERWATER ACCIDENT REPORT

Forward report to:
NATIONAL UNDERWATER ACCIDENT DATA CENTER
P.O. Box 68 — Kingston, R. I. 02881

VICTIM INFORMATION

Name of Victim: ..... (Last / First / Middle)
Address: .....
..... State .....

Victim's Sex ... Age ... Hgt. ... Wgt. ...
Marital Status: M ... S ... D ... W ... UNK ...
Occupation .....
Employer .....

LOCATION OF ACCIDENT

Location of Accident (use landmarks, distance from prominent terrain features. Attach Chart or Map if available) ..... State .....

CIRCLE LOCATION
(By Code Number)
1. Ocean, Bay, Sea
2. Minor Lake, Pond, Slough
3. Quarry, Pit, Open Mine
3A. Cave
4. River
5. Major Lake, Pond
6. Swimming Pool
7. Great Lakes

TIME AND PLACE OF ACCIDENT

Date and Time of Accident ..... (Day Mo. Yr. Use 24-Hr. Clock)
Date and Time of Death .....
Date and Time of Recovery .....
Death Occurred in Water? ..... (Yes or No)

Autopsy Performed: ..... (Yes or No)
Cause of Death: .....
Medical Examiner ..... (Name)
..... (Address / Phone)

CODE FOR NON-FATAL INCIDENT
Circle one only (A, B, C, or D) which best describes seriousness of incident. Important: Report all "incidents", however minor. Describe in detail on page 4. Include equipment factors.

A. Incapacitating injury rendering person unable to perform normal activities as walking or diving or to leave scene without assistance.
B. Nonincapacitating evident injury as loss of blood, abrasions, lump on head, etc.
C. Possible injury indicated by complaining of pain, blackout, limping, nausea, etc.
D. Incident with no apparent injury, (near miss, etc.)

DESCRIPTION OF DIVES AND ACTIVITIES

Description of all dives within previous 12 hours including accident dive.

Depth	Time Down	Surface Interval

Type of Diving: (Explain if Necessary)
Scuba ..... Skin ..... Other ..... Unknown .....
Others in accident ..... (Yes or No)
Separate report filed ..... (Yes or No)

At time of incident, Activities engaged in:
Recreational .....
Commercial .....
Under instruction .....
Instructing .....
Cave diving .....
Spear fishing .....
Photography .....
Night diving .....

At time of incident, Buddy record:
Diving alone .....
Diving with buddy .....
Buddy distance .....
Diving with more than one .....
Distance to next nearest diver .....

Vessels involved ..... (Yes or No)
U.S. Coast Guard aid sought ..... (Yes or No)
(Give Details in "Description of Accident", Name, Captain, Address, Phone, etc.)

WITNESSES

Name	*Address*	*Phone*	*Function/Role*

Reported by:
Name .....
Address .....
City ..... Phone .....

Other Contacts:
Name .....
Address .....
City ..... Phone .....

ENVIRONMENTAL CONDITIONS

Sea Calm Moderate Rough Weather Clear Cloudy Fog Snow Rain

Current Slight Moderate Strong Direction Thunderstorm Tornado Hurricane Other

Wave Height Water Depth Type Bottom Wind Force Direction

Water Temperature (°F) Air Temperature (°F)

VISIBLE INJURIES

Illustrate all visible injuries (cuts, abrasions, fractures, etc.)

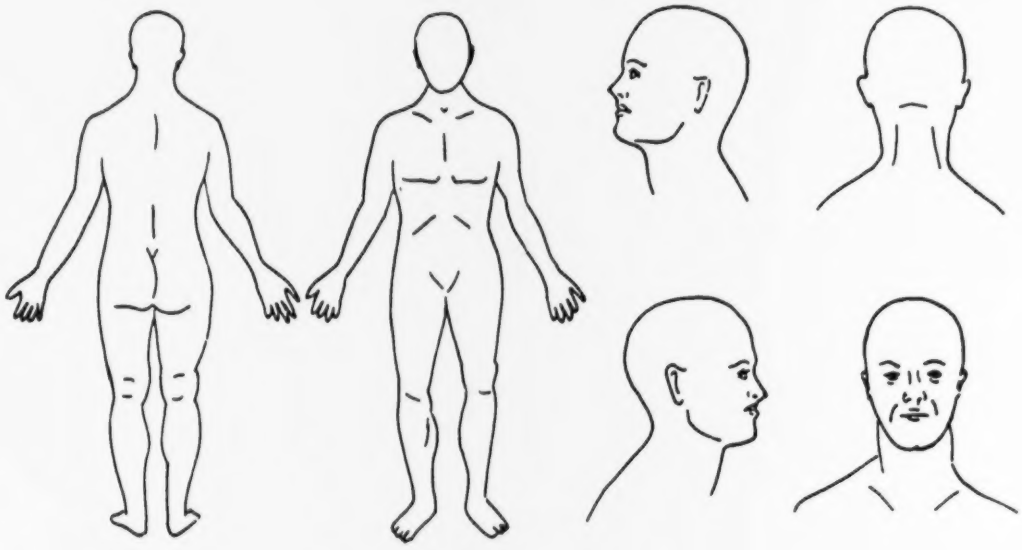

EXPERIENCE DATA

Swimming Experience: Years

Skindiving Experience: Years

Scuba Experience: Years

Courses and Agency

(1) Certification Date

(2) -DO-

(3) -DO-

HUMAN FACTORS

Hours of sleep in past 24 hours

Time of last meal What and how much?

Time of last alcoholic drink What and how much?

Any known physical ailments, disability or impairment?

EQUIPMENT DATA

NOTE: *Equipment Brand, Type and Serial Number data need be included only if malfunction or failure was contributory to the incident.*

Equipment Data Date and Time of Inspection	Brand, Type	Present Before Diving (Yes or No)	Present at Time of Recovery (Yes or No)	Condition	Equipment	Brand, Type, Serial No	Present Before Diving (Yes or No)	Present at Time of Recovery (Yes or No)	Condition
Diving Suit					Knife (Posit.)				
Hood					Ab Iron				
Boots or Socks					Flashlight				
Gloves or Mitts					Depth Gauge				
Mask					Spear Gun				
Snorkel					Compass				
Fins					Regulator				
Weight Belt (lbs.)					Tank				
Buckle					Reserve				
Flotation Device					Watch				
Other Equipment									

Flotation Device: Used ..... (Yes or No)

Tested after event? ..... (Yes or No)

Regulator Tested? ..... (Yes or No)

Results .....

Tank: Air Left ..... (PSIG) MFG. ..... Date .....

Last Hydro-Test Date .....

Last Visual Inspection Date .....

Internal Condition: Clean .....

Slight Corrosion .....

Extensive Corrosion .....

By: ..... NAME ..... ADDRESS ..... PHONE

Special Comments on Equipment .....

Equipment Inspected by: ..... NAME ..... ADDRESS ..... PHONE

Equipment: Released to/or Held by: ..... NAME ..... ADDRESS ..... PHONE

DETAILED DESCRIPTION OF ACCIDENT

Describe in detail how the accident happened, including what the person was doing, any specific marine life or objects and the action or movement which led to the event. Include details of first aid or resuscitation efforts. Describe any "Decompression" and/or "Recompression-Treatment" in description of accident.

APPENDIX 7. CMAS QUALIFICATION EQUIVALENTS

FEVRIER - FEBRUARY - FEBRERO 1986

LISTE DES PAYS AYANT OBTENU LES EQUIVALENCES C.M.A.S.

LIST OF COUNTRIES WHICH HAVE OBTAINED THE EQUIVALENCES C.M.A.S.

LISTA DE LOS PAISES QUE HAN OBTENIDO LAS EQUIVALENCIAS C.M.A.S.

AFRIQUE DU SUD - SOUTH AFRICA - AFRICA DEL SUR : SOUTH AFRICAN UNDERWATER UNION

3rd CLASS DIVER	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2nd CLASS DIVER	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1st CLASS DIVER	=	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
PROVINCIAL INSTRUCTOR	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
NATIONAL INSTRUCTOR	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ALLEMAGNE RFA - GERMANY FRG - ALEMANA RFA : VERBAND DEUTSCHER SPORTTAUCHER

BREVET SPORTTAUCHSCHEIN	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET BRONZE	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BREVET SILBER	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
BREVET GOLD	=	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
MONITEUR BRONZE	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR ARGENT	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
TAUCHLEHRER	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ARGENTINE - ARGENTINA : FEDERACION ARGENTINA DE ACTIVIDADES SUBACUATICAS

BUCEADOR 1 ESTRELLA	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BUCEADOR 2 ESTRELLAS	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BUCEADOR 3 ESTRELLAS	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITOR NACIONAL DE BUCEO	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTOR NACIONAL	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
PROFESOR	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

AUTRALIE - AUSTRALIA : AUSTRALIAN UNDERWATER FEDERATION

NQS SCUBA DIVER	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
NQS ADVANCED DIVER	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
NQS ADVANCED DIVEMASTER	=	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
NAC LEVEL 1 (assistant instructor)	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
NAC LEVEL 2 (scuba instrutor)	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
NAC LEVEL 3 (advanced divemaster instructor)	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

AUTRICHE - AUSTRIA : TAUCHSPORTVERBAND OSTERREICHS

BREVET ELEMENTAIRE	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET 1 ETOILE	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET 2 ETOILES	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BREVET 3 ETOILES	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

BELGIQUE - BELGIUM - BELGICA : FEDERATION BELGE DE RECHERCHES ET D'ACTIVITES SOUS-MARINES

BREVET ELEMENTAIRE	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET MOYEN	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BREVET SUPERIEUR	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
AIDE-MONITEUR	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR FEDERAL	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR NATIONAL	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

BRESIL - BRAZIL : CONFEDERACAO BRASILEIRA DE PESCA E DESPORTOS SUBACUATICOS

PLONGEUR 1 ETOILE	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2 ETOILES	=	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3 ETOILES	=	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	=	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	=	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	=	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

BULGARIE - BULGARIA : FEDERATION BULGARE DES SPORTS SOUS-MARINS

SCAPHANDRIER PLONGEUR AUTONOME	=	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.

CANADA : A.C.U.C.

DIVER LEVEL I	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
DIVER LEVEL II	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
DIVER LEVEL III	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
DIVER LEVEL IV	•	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
INSTRUCTOR LEVEL I	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR LEVEL II INSTRUCTOR LEVEL III INSTRUCTOR LEVEL IV	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

CANADA : FEDERATION QUEBECOISE DES ACTIVITES SUBAQUATIQUES

PLONGEUR 1 ETOILE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2 ETOILES	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3 ETOILES	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

CHYPRE - CYPRUS - CHIPRE : CYPRUS SUBAQUA CLUB ANDREAS KARIOLOU

3rd GRADE DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2nd GRADE DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
1st GRADE DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
4th GRADE DIVING INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
3rd GRADE DIVING INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
2nd GRADE DIVING INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.
1st GRADE DIVING INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

COLOMBIE - COLUMBIA : FEDERACION COLOMBIANA DE ACTIVIDADES SUBACUATICAS

BUZO DEPORTIVO 1 ESTRELLA	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BUZO DEPORTIVO 2 ESTRELLAS	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BUZO DEPORTIVO 3 ESTRELLAS	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
INSTRUCTOR I	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTOR II	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR III	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

CUBA : FEDERACION CUBANA DE ACTIVIDADES SUBACUATICAS

BUZO 1 ESTRELLA	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BUZO 2 ESTRELLAS	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BUZO 3 ESTRELLAS	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
INSTRUCTOR 1 ESTRELLA	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTOR 2 ESTRELLAS	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR 3 ESTRELLAS	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

DANEMARK - DENMARK - DINAMARCA : DANSK SPORTDYKKER FORBUND

PLONGEUR SPORTIF NORDIQUE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR DE 1ere CLASSE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
INSTRUCTOR ONE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTOR TWO	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR THREE	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

EGYPTE - EGYPT - EGIPTO : EGYPTIAN UNDERWATER SPORTS FEDERATION

1 STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
3 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DVIER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ESPAGNE - SPAIN - ESPAÑA : FEDERACION ESPAÑOLA DE ACTIVIDADES SUBACUATICAS

BUCEADOR DEPORTIVO DE 2° CLASE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	M.A.S.
BUCEADOR DEPORTIVO DE 1° CLASE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	M.A.S.
MONITOR DEPORTIVO	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C M.A.S.
INSTRUCTOR DEPORTIVO	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C M.A.S.

FINLANDE - FINLAND : SUOMEN URIELUSURELTAJAIN LIITTO RY

PLONGEUR SPORTIF NORDIQUE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C M A.S.
PLONGEUR DE 1ere CLASSE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

FRANCE - FRANCIA : FEDERATION FRANCAISE D'ETUDES ET DE SPORTS SOUS-MARINS

BREVET ELEMENTAIRE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
1er ECHELON	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2ème ECHELON	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
2ème ECHELON + INITIATEUR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR FEDERAL 1er DEGRE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
BEES 1er DEGRE / AUXILIAIRE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR FEDERAL 2ème DEGRE	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.
BEES 2ème DEGRE / NATIONAL	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

GRANDE-BRETAGNE - GREAT-BRITAIN - GRAN-BRETAÑA : BRITISH SUB AQUA CLUB

NOVICE DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
SPORT DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
DIVE LEADER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
ADVANCED DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1st CLASS DIVER	•	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
CLUB INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
ADVANCED INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
NATIONAL INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

GRECE - GREECE - GRECIA : FEDERATION HELLENIQUE DE LA PECHE SPORTIVE ET DES ACTIVITES SUBAQUATIQUES

PLONGEUR AUTONOME 1 ETOILE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR AUTONOME 2 ETOILES	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR AUTONOME 3 ETOILES	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

HOLLANDE - NETHERLANDS - HOLANDA : NEDERLANDSE ONDERWATERSPORT BOND

1 STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
3 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

HONG-KONG : HONG-KONG UNDERWATER FEDERATION

3rd CLASS DIVER POOL	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
3rd CLASS DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2nd CLASS DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1st CLASS DIVER	•	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
CLUB INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
ADVANCED INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
NATIONAL INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

INDONESIE - INDONESIA : INDONESIAN SUBAQUATIC SPORT ASSOCIATION

SCUBA DIVER III	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
SCUBA DIVER II	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
MASTER SCUBA DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
CLUB INSTRUCTOR II	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
CLUB INSTRUCTOR I	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
REGIONAL INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

IRLANDE - IRELAND - IRLANDA : IRISH UNDERWATER COUNCIL

TRAINEE DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
CLUB DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
LEADING DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ISRAEL : FEDERATION FOR UNDERWATER ACTIVITIES IN ISRAEL

1 STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
3 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ITALIE - ITALY - ITALIA : FEDERAZIONE ITALIANA DELLA PESCA SPORTIVA E ATTIVITA SUBACQUEE

PLONGEUR 1er DEGRE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2ème DEGRE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3ème DEGRE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
INSTRUCTEUR D'IMMERSION 1° DEGRE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTEUR D'IMMERSION 2° DEGRE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTEUR D'IMMERSION 3° DEGRE	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

JAPON - JAPAN : FEDERATION JAPONAISE DES ACTIVITES SUBAQUATIQUES

1 STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
3 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

LIECHTENSTEIN : LIECHTENSTEINER TAUCHSPORT VERBAND

BREVET 1 ETOILE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET 2 ETOILES	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.

LUXEMBOURG - LUXEMBURGO : FEDERATION LUXEMBOURGEOISE DES ACTIVITES SUBAQUATIQUES

PLONGEUR 1er DEGRE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2ème DEGRE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3ème DEGRE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1er DEGRE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2ème DEGRE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3ème DEGRE	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

MALTE - MALTA : FEDERATION OF UNDERWATER ACTIVITIES

ELEMENTARY GRADE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
INTERMEDIATE GRADE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
ADVANCED GRADE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ILE MAURICE - MAURITIUS ISLAND - ISLA MAURICIO : THE MAURITIUS UNDERWATER GROUP

3rd CLASS DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2nd CLASS DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.

MEXIQUE - MEXICO : FEDERACION MEXICANA DE ACTIVIDADES SUBACUATICAS

BUCEADOR JUVENIL	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BUCEADOR	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BUCEADOR DE PRIMERA	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
ASSISTANT INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

MONACO : CULB DE CHASSE ET D'EXPLORATION SOUS-MARINE

PLONGEUR 1 ETOILE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2 ETOILES	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3 ETOILES	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.

NORVEGE - NORWAY - NORUEGA : NORGES DYKKEFORBUND

PLONGEUR SPORTIF NORDIQUE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR DE 1ère CLASSE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

NOUVELLE-ZELANDE - NEW-ZEALAND - NUEVA-ZELANDA : NEW-ZEALAND UNDERWATER ASSOCIATION

BASIC SCUBA DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
ADVANCED SCUBA DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
COACH DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1st CLASS DIVER	•	PLONGEUR 4 ETOILES	4 STAR DIVER	BUCEADOR 4 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

POLOGNE - POLAND - POLONIA : POLSKIE TOWARZYSTWO TURYSTYCZNO KRAJOZNAWCZE ZARZAD GLOWNY KOMISJA DZIALALNOSCI PODWODNEJ

BREVET INFERIEUR	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET MOYEN	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BREVET SUPERIEUR	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR DE CLUB	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR REGIONAL	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR NATIONAL	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

SINGAPOUR - SINGAPORE SINGAPORE UNDERWATER FEDERATION

1 STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
3 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

SUEDE - SWENDEN - SUECIA : SVENSKA SPORTDYKARFORBUNDET

PLONGEUR SPORTIF NORDIQUE	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR DE 1ère CLASSE	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
1 STAR INSTRUCTOR	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
2 STAR INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
3 STAR INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

SUISSE - SWITZERLAND - SUIZA : FEDERATION SUISSE DES SPORTS SUBAQUATIQUES

BREVET ELEMENTAIRE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
BREVET 1er ECHELON	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BREVET 2ème ECHELON	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

TCHECOSLOVAQUIE - CZECHOSLOVAKIA - CHECOSLOVAQUIA : SVAZ POTAPECU CESKOSLOVENSKA CZECHOSLOVAK DIVERS ASSOCIATION

INSIGNE DE BRONZE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
INSIGNE D'ARGENT	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
INSIGNE D'OR	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 3ème CLASSE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2ème CLASSE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 1ère CLASSE	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

TUNISIE - TUNISIA - TUNEZ : YACHTING CLUB DE TABARKA

BREVET ELEMENTAIRE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
1er ECHELON	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2ème ECHELON	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR AUXILIARE	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR FEDERAL	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ETATS-UNIS - UNITED STATES OF AMERICA - ESTADOS UNIDOS : Y.M.C.A.

BRONZE STAR DIVER	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
SILVER STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
GOLD STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
SCUBA TEACHING ASSISTANT	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
ASSISTANT INSTRUCTOR	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
SCUBA INSTRUCTOR	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

VENEZUELA : FEDERACION VENEZOLANA DE ACTIVIDADES SUBMARINAS

BUCEADOR BASICO	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
BUCEADOR AVANZADO	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
INSTRUCTOR 1 ESTRELLA	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
INSTRUCTOR 2 ESTRELLAS	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
INSTRUCTOR 3 ESTRELLAS	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

YOUGOSLAVIE : SAVEZ ZA POVODNE AKTIVNOSTI I SPORTSKI RIBOLOV NA MORU SFR JUGOSLAVIJE

PLONGEUR 1 ETOILE	•	PLONGEUR 1 ETOILE	1 STAR DIVER	BUCEADOR 1 ESTRELLA	C.M.A.S.
PLONGEUR 2 ETOILES	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
PLONGEUR 3 ETOILES	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.
MONITEUR 1 ETOILE	•	MONITEUR 1 ETOILE	1 STAR INSTRUCTOR	INSTRUCTOR 1 ESTRELLA	C.M.A.S.
MONITEUR 2 ETOILES	•	MONITEUR 2 ETOILES	2 STAR INSTRUCTOR	INSTRUCTOR 2 ESTRELLAS	C.M.A.S.
MONITEUR 3 ETOILES	•	MONITEUR 3 ETOILES	3 STAR INSTRUCTOR	INSTRUCTOR 3 ESTRELLAS	C.M.A.S.

ZIMBABWE : ZIMBABWE UNDERWATER DIVER'S ASSOCIATION

3 STAR DIVER	•	PLONGEUR 2 ETOILES	2 STAR DIVER	BUCEADOR 2 ESTRELLAS	C.M.A.S.
2 STAR DIVER	•	PLONGEUR 3 ETOILES	3 STAR DIVER	BUCEADOR 3 ESTRELLAS	C.M.A.S.

APPENDIX 8. ADDRESSES OF SCIENTIFIC DIVING ASSOCIATIONS

Note: The following addresses refer to organisations which are exclusively devoted to the pursuit of scientific research using diving. They are professional societies or associations whose membership is drawn from research laboratories and universities. The list does not include biomedical research into diving physiology. Many national sports diving Federations have scientific committees, usually involving professional scientists, which exist to encourage fieldwork by volunteers and students. Such committees are not listed in this Appendix. The addresses of national diving federations can be obtained from the CMAS Year Book, published by CMAS, 34, rue du Colisée, Paris 75008, France.

American Academy of Underwater Sciences: 947 Newhall Street, Costa Mesa, California 92627, USA.

Barologia, South African Society for Underwater Science, c/o National Research Institute for Oceanology, PO Box 320, Stellenbosch 7600, South Africa.

Canadian Association of Underwater Sciences, c/o R. Sparks, UBC Diving Operations Office, Room 155A, Auditorium Annex 1924, West Mall, University of British Columbia, Vancouver, BC, Canada V6T 1W9.

Centre Uni·ersitaire International de Plongée Scientifique, c/o Professeur Gaston Fredj, Department of Biological Oceanography, University of Nice, 28 Avenue de Valrose, 06034 Nice Cedex, FRANCE.

CMAS Scientific Committee, 34 rue du Colisée, Paris 75008, France.

Colimpha, c/o Alain Couté, Laboratoire de Cryptogamie, 12 rue de Buffon, Paris 75005, France.

Comitato Italiano Ricerche Studi Subacquei, c/o Victor de Sanctis, Via Bellaria 50, Pistoia, Italy.

Underwater Association for Scientific Research, c/o Dr. Richard Pagett, Wimpol Ltd., Hargreaves Road, Groundwell Industrial Estate, Swindon, Wiltshire, SN2 5AZ, England.

APPENDIX 9. MEDICAL FORMS AND WAIVER FORMS

This Appendix utilizes the medical guidelines of the AAUS, CAUS and UASR to set down a suggestion for two levels of medical certification for diving; Class II and Class I. This format of two different levels has a basis in current practice at some institutions, but is not widely formalized at present. Generally the requirements of the Class II would be less stringent than those of the Class I. For example, the fitness requirement for a Class II would be a time/distance snorkel swim of 800 meters in 16 minutes using mask, fins, snorkel and an ABLJ, or alternatively a Master's Step Test. For a Class I a similar snorkel swim would be required, but would be supplemented with a sub-maximal stress test on a bicycle ergometer or treadmill with a three lead EKG.

These examples of tests would be appropriate for the Class II. A somewhat more stringent series of tests would be required for the Class I, and would be supplemented with a standard oxygen tolerance test and a long bone X-ray series. The duration of validity of the Class II would be 12 calendar months, and of the Class I, 6 calendar months.

It may well be that the current basic or Class II standard will remain adequate for the bulk of scientific diving.

A check-sheet should be developed based on the medical guidelines noted.

Example 1 .. .. .. p.217

Example 2 .. .. .. p.222

Example 3 .. .. .. p.226

EXAMPLE 1

THE UNIVERSITY OF BRITISH COLUMBIA

Diving Programme

Information Sheet for Medical Examiners

Tests for Medical Authorization

Test	Initial Examination	Subsequent Examination
Visual Acuity	x	x
Color Blindness	x	
Hearing	x	x
Fitness Evaluation	x	x
ECG	(a)	(b)
Urinanalysis	x	x
Chest X-ray	x	(b)
Hematocrit or Hemoglobin	x	x
Sickle Cell Index	(b)	
White Cell Count	x	x

(a) over 40 years of age or if clinically indicated
(b) only if clinically indicated

1. Clarification of Tests

A. Ophthalmology. Standard visual acuity and color blindness tests shall be given. Personnel with uncorrected vision greater than 20/80 shall require corrective lenses.

B. E.N.T. An extensive E.N.T. examination shall be given and shall include observed movement of the drum during Valsalva manuever. Hearing shall be 'conversationally adequate'.

C. Fitness. A fitness evaluation will be conducted by the UBC Diving Officer and the results entered on the Physical Examination Form (see Item 18).

D. ECG. A standard 12 lead ECG shall be given to individuals over 40 years of age of if clinically indicated.

E. Urology. A standard urinanalysis shall be performed for all personnel.

F. Hematology. Standard hematocrit or hemoglobin and white cell count shall be performed for all divers. A sickle cell index shall be performed upon initial examination for divers of known negroid descent.

G. Radiology. A full inspiration, posterior chest x-ray shall be done on initial examination of all divers and when clinically indicated.

H. Additional Tests. The tests in this list are minimum tests for University Medical Authorization for Diving. Additional tests shall be done at the University Diving Medical Officer's or examining physician's discretion.

2. Disqualifying and Limiting Factors for Diving

The following factors shall disqualify personnel from diving or limit their exposure to diving depending on severity, presence of residual effects, response to therapy, number of occurrences, and diving mode. In all cases, final responsibility and authority for medically authorizing personnel to engage in diving activity shall rest with the University Diving Medical Officer.

System	Disqualifying Factors	Allowable Factors
General	Gross obesity Impaired exercise tolerance.	(See 1C.)
E.N.T.	Perforated eardrums. Chronic otitis media or mastoid operation. Chronic destruction of sinuses or eustachian tubes. Inability to clear ears.	Healed perforations. Successful tympanoplasty. Unilateral nasal block. Sinusitis if not adversely affected by diving, but not if of infective origin.
Oral Cavity	Oral disease. Bad teeth and fillings.	Dentures should extend to mucobuccal fold and should be retained in place in all jaw positions. Partial plates should not be retained during diving.
Respiratory	Any chronic lung disease, past or present. Any recent history of bronchial asthma requiring treatment. Emotionally-induced asthma. History of pneumothorax.	Mild chronic bronchitis (smoker?) without emphysema or important airways obstruction if exercise tolerance, spirometry, and CXR normal. Healed primary focus tuberculous scars in established divers or trainees. Bronchial asthma, if clinically normal between attacks and exercise tolerance normal.
Cardio-Vascular	Heart disease. Hypertension. Systolic BP over 150 mm Hg. Diastolic BP over 90 mm Hg. (100 mm Hg if aged over 35)	Minor asymptomatic heart disease other than ischaemic with specialist referral and approval. Varicose veins (if severe, caution must be observed using dry suit).

PHYSICAL EXAMINATION FORM
(this side to be completed by medical staff)

A. **Nursing Station:**

Height _____ (ins.) Weight _____ (lbs.) Vision: Right Eye Left Eye
Blood Pressure_____ Pulse _____ Uncorrected _____ _____
Corrected _____ _____
Color vision _____ _____

B. **Medical History:**

Is there a significant past history which would disqualify the applicant from diving?
Yes_____ No_____

Remarks:_____

_____

C. **Examination:** (please check the following items; if abnormal, give details below)

		Normal	Abnor.			Normal	Abnor.
1.	General appearance (including obesity, gross defects, postural abnormalities).....	_____	_____	11.	Inguinal rings (males)....	_____	_____
				12.	Genitalia (males).....	_____	_____
				13.	Anus and rectum (if indicated).....	_____	_____
2.	Head and neck.....	_____	_____	14.	Extremities.....	_____	_____
3.	Eyes.....	_____	_____	15.	Skin (eruptions or reactions).....	_____	_____
4.	Nose and sinuses.....	_____	_____				
5.	Ears (including hearing, otitis, perforation).....	_____	_____	16.	Neurologic.....	_____	_____
				17.	Psychiatric (including apparent motivation for diving, emotional stability claustrophobia).	_____	_____
6.	Mouth and throat.....	_____	_____				
7.	Spine.....	_____	_____				
8.	Lungs and chest.....	_____	_____				
9.	Heart.....	_____	_____	18.	Fitness.....	_____	_____
10.	Abdomen.....	_____	_____		_____	_____	
					Diving Officer Signature	Date	

Explanation of abnormalities: _____

_____

_____

D. **Test Results** (See Information Sheet for Medical Examiners)

Chest X-Ray _____ Hemoglobin/Hematocrit_____ Urinanlysis _____
12 lead ECG _____ WBC _____ Sickel cell screen _____

E. **Final Impression:** (circle one)

Approval: I find no defects which I consider incompatible with diving.
Conditional Approval: I do not consider diving in this person's best interest, but find no defects which present marked risk. I have discussed my impression with him/her.
Disapproval: This applicant has defects which in my opinion clearly would constitute unacceptable hazards to his/her health and safety in diving.

Signature of examining physician_____ Date_____

THE UNIVERSITY OF BRITISH COLUMBIA
Diving Programme
MEDICAL HISTORY AND EXAMINATION FORM
(this side to be completed by applicant)

Name_____ Age_____ Sex_____ Date_____
Address_____ Phone_____
MSP_____ Family Physician_____

1. Have you had previous experience in diving? Yes_____ No _____
2. When driving through mountains or flying do you have trouble equalizing pressure in your ears or sinuses? Yes_____ No _____
3. Have you ever been rejected for service, employment, or insurance for medical reasons? (if yes, explain under "Remarks" or discuss with doctor) Yes_____ No _____
4. When was your last physical examination? Date_____ Results_____
5. When was your last chest X-ray? Date_____ Results_____
6. Have you had an electrocardiogram? Date_____ Results_____
7. Have you had an electroencephalogram? Date_____ Results_____
8. Do you smoke? Yes_____ No _____ If so, how much _____

(Check the blank if you have, or ever had, any of the following. Explain under "Remarks" or discuss with doctor.)

9. ___ Frequent colds or sore throat.
10. ___ Hay fever or sinus trouble.
11. ___ Trouble breathing through nose (other than during colds).
12. ___ Painful or running ear, mastoid trouble, broken eardrum.
13. ___ Hard of hearing.
14. ___ Asthma or bronchitis.
15. ___ Shortness of breath after moderate exercise.
16. ___ Pleurisy.
17. ___ Collapsed lung (pneumothorax)
18. ___ Chest pain or persistent cough.
19. ___ Tire easily.
20. ___ Spells of fast, irregular, or pounding heartbeat.
21. ___ High or low blood pressure.
22. ___ Any kind of "heart trouble .
23. ___ Frequent upset stomach, heartburn or indigestion, peptic ulcer.
24. ___ Frequent diarrhea or blood in stool.
25. ___ Anemia or (females) heavy menstruation
26. ___ Belly or backache lasting more than a day or two.
27. ___ Kidney or bladder disease; blood, sugar or albumin in urine.
28. ___ Broken bone, serious sprain or strain dislocated joint.
29. ___ Rheumatism, arthritis, or other joint trouble.
30. ___ Severe or frequent headaches.
31. ___ Head injury causing unconsciousness.
32. ___ Dizzy spells, fainting spells or fits.
33. ___ Trouble sleeping, frequent nightmares or sleepwalking.
34. ___ Nervous breakdown or periods of marked nervousness or depression.
35. ___ A phobia for closed-in spaces, large open places, or high places.
36. ___ Any neurological or psychological conditions.
37. ___ Train, sea or air sickness, nausea.
38. ___ Alcoholism or any drug or narcotic habit (including regular use of sleeping pills, benzedrine, etc.)
39. ___ Recent gain or loss of weight or appetite.
40. ___ Jaundice or hepatitis.
41. ___ Tuberculosis.
42. ___ Diabetes
43. ___ Rheumatic fever
44. ___ Dental bridgework or plates.
45. ___ Susceptibilty to panic.
46. ___ Pain from altitude or flying,
47. ___ Surgery.
48. ___ Any serious accident, injury or illness not mentioned above (describe under "Remarks", give dates).
49. ___ In what sports or exercise do you regularly engage: _____

REMARKS: _____

System	Disqualifying Factors	Allowable Factors
Abdomen, G.U.S.	Proteinuria until cause established. Gross abnormalities of renal tract. Pregnancy.	Peptic ulcer, unless unduly active or troublesome. Abdominal hernias (advise repair).
Limbs	Disease, amputation or deformity excessively limiting ability to swim. Juxta-articular osteonecrosis.	Arthritis or arthrodesis not markedly limiting ability to swim or rescue others.
Endocrine	Insulin-requiring diabetes.	
Central Nervous System	Severe stammering. Epilepsy, including post-traumatic fits. Cranial surgery. Any serious head injury in the past two years or head injury with sequelae.	Must present an acceptable EEG.
Hematology	Hemoglobinopathies.	
Additional	Malignancies (active). Impaired organ function caused by alcohol or drug use. Conditions requiring continuous medication for control. Vestibular end organ destruction.	Malignancies treated and without recurrence for five years.

Memorandum for Medical Officers

The certification of a man to be fit to dive implies that he is both physically and psychologically healthy. A diver may have to undergo physical strain under adverse conditions and upon his reaction to an emergency may depend not only his own life but also the lives of others. During the examination he should be carefully observed for psychological defects.

A certificate of fitness should not be given when a man is undergoing treatment for any acute condition.

Please record the results of your examination in SI units where applicable.

Please use a ball-point pen when filling in this form.

The following conditions disqualify a man from diving:

1. Most skin disorders. Saturation divers are particularly prone to intertrigo and otitis externa.
2. Excessive obesity.
3. Inability to clear the ears.
4. Perforated eardrum, chronic otitis or mastoid operation.
5. Chronic obstruction of the Eustachian tubes or sinuses.
6. Any chronic lung disease, past or present; bronchial asthma; history of pneumothorax.
7. Heart disease, essential hypertension.
8. Chronic gastro-intestinal disease (e.g. peptic ulcers).
9. Hernia.
10. Gross abnormality of the renal tract.
11. Epilepsy; severe head injury; cranial surgery; disease of the central nervous system.
12. Severe hearing or visual defects.
13. Diabetes.
14. Sickle cell trait.
15. Psychiatric disorder.
16. Severe stammering.

The Health and Safety Executive issue a document entitled: "Recommendations on Medical Examination of Divers: Information for Examining Doctors". Amongst other things this refers to long-bone and joint X-rays. These should be taken in accordance with the recommended techniques of the M.R.C. Decompression Sickness Panel. A copy of this document entitled "Radiological Skeletal Survey for Aseptic Necrosis of Bone in Divers and Compressed Air Workers: Recommended Technique" is available from the M.R.C. Decompression Sickness Central Registry, 21 Claremont Place, Newcastle upon Tyne, NE2 4AA.

Please send the yellow copies of completed forms, and the bone and joint X-ray films, to the Registry in Newcastle.

MEDICAL CERTIFICATE. CODE OF PRACTICE FOR SCIENTIFIC DIVING

Name : Address :

Date of Birth :

Number of years diving :

PART 1. TO BE PUT TO THE CANDIDATE BY THE EXAMINING DOCTOR

Have you suffered at any time from any of the following ?
Answer YES or NO. If YES, give details in space at bottom of page.

1. Earache, or ear discharge .....
2. Sinus trouble, nose bleeds, hay fever .....
3. Any lung disease, bronchitis or asthma.....
4. Disease of the heart & circulation including high blood pressure .....
5. Fits, recurrent headaches or any nervous disorder.....
6. Blackouts or fainting attacks, concussion .....
7. Diabetes .....
8. Peptic ulcer ; hernia, gastro-intestinal affections .....
9. Do you wear dentures ? .....
10. Do you smoke ?.....
11. Have you any physical disability or abnormality ? .....
12. Have you ever been admitted to hospital ? .....

    If YES, for what reason ? .....
13. Are you taking (or recently taken) any tablets or any other treatment ?.....
14. Any diving injury, including damaged ear drums, decompression sickness, etc ? .....
15. Date of last medical examination .....
16. Date of last Chest X-Ray .....

Details : .....

.....

.....

I declare the above answers to be true and that I have omitted nothing that might be relevant to my fitness for diving.

Signature : ..... Date : .....

PART 2. TO BE COMPLETED BY EXAMINING DOCTOR

Height : ..... Weight : ..... kg.

Ears : R Drum ..... Canal ..... Valsalva .....

L Drum ..... Canal ..... Valsalva .....

Sinuses : .....

Teeth and gums : .....

Chest movements : ..... Chest expansion (cm^3) .....

Lung Fields : .....

Heart sounds : .....

Pulse ..... Blood pressure ..... Apex beat .....

Abdomen : ..... Hernial orifices .....

Central nervous system : .....

.....

SPECIAL INVESTIGATIONS

1. Full Plate Chest X-Ray : .....
2. Exercise tolerance (See information note) .....
3. Urine : Sugar .....
   Albumen .....
   Blood .....
   Ketones .....
4. Peak Expiratory Flow : ..... (if available)

If facilities allow the following are recommended in addition :

1. Exercise ECG (on first examination, annually thereafter if aged over 35 years) .....
2. FEV_1 ..... FVC ..... FEV_1/FVC .....

REMARKS : .....

.....

.....

CERTIFICATE OF FITNESS

In my opinion the candidate is fit to carry out scientific or amateur diving activities.

Signature : ..... Qualifications : ..... Date : .....

Address : .....

MEDICAL CERTIFICATE. CODE OF PRACTICE FOR SCIENTIFIC DIVING
INFORMATION FOR MEDICAL OFFICERS CONDUCTING EXAMINATIONS OF DIVERS

Particular attention should be paid to the ENT and Respiratory Systems. It must be borne in mind that diving may involve moderately severe exercise under adverse conditions. The safety of the candidate and others depends on his physical and psychological fitness.

System	Disqualifying Factors	Allowable Factors and Other Points
General	Gross obesity. Impaired, exercise tolerance.	(See note below).
E.N.T.	Perforated eardrums. Chronic otitis media or mastoid operation. Chronic destruction of sinuses or Eustachian tubes. Inability to clear ears.	Healed perforations. Successful tympanoplasty. Unilateral nasal block. Sinusitis if not adversely effected by diving but not if of infective origin). Valsalva test of drum mobility optional, and outweighed by practical diving test.
Oral Cavity	Dentures must be retained in place on fully opening the mouth and not be dislodged by placing jaws together in any position, or by movement of one denture against the other. They should extend to the muco-buccal fold. Applicants should be advised about bad teeth and fillings. No firm advice as to whether an individual should or should not wear his dentures when diving is possible, but small dentures should not be worn when diving.	
Respiratory	Any chronic lung disease, past or present (see opposite). Any recent history of bronchial asthma requiring treatment. History of pneumothorax. Emotionally-induced asthma (each case should be judged on its merits).	Mild chronic bronchitis (smoker?) without emphysema or important airways obstruction if exercise tolerance, spirometry and CXR normal. Healed primary focus tuberculous scars in established divers or new recruits. Bronchial asthma, if clinically normal between attacks, and exercise tolerance normal. Full-plate CXR required.
Cardio-vascular	Heart disease. Hypertension. Systolic B.P. over 150 mm Hg. Diastolic B.P. over 90 mm Hg. (100 mm Hg if aged over 35).	Minor asymptomatic heart disease other than ischaemic following specialist referral and approval. Varicose veins (but if severe, caution against use of dry suit).
Abdomen, G.U.S.	Proteinuria until cause established. Gross abnormalities of renal tract Pregnancy.	Peptic ulcer, unless unduly active or troublesome. Abdominal hernias (but advise repair).
Limbs	Disease, amputation or deformity excessively limiting ability to swim. (Specialist referral is advisable).	Arthritis or arthrodesis not markedly limiting ability to swim or rescue others.
Endocrine	Insulin-requiring diabetes.	
Central Nervous System	Severe stammering. Epilepsy, including post-traumatic fits. Cranial surgery. Any serious head injury in the past two years.	To be judged on merit. Must present an acceptable EEG.

Note: **Exercise Tolerance:** A candidate must not fail to pass the following simple test:
After stepping up onto a chair 5 times in 5 seconds, the pulse rate should return to the pre-exercise level in 45 seconds.

EXAMPLE 3

WOODS HOLE OCEANOGRAPHIC INSTITUTION

STATEMENT OF UNDERSTANDING

To be completed by all divers

1. Skin, SCUBA and surface-supplied diving are physical activities involving heavy exertion. A diver must be in good general health, free from cardiovascular and respiratory disease, and have good exercise tolerance. Even momentary impairment of consciousness underwater may be fatal.

2. While swimming or using skin, SCUBA, or surface-supplied diving equipment, the body is subject to a variety of influences that may become potentially hazardous. Some of these hazards include, but are not limited to drowning, ruptured ear drums or sinuses, air embolism, decompression sickness (the 'bends'), and a variety of other barotrauma (pressure-related injuries).

3. There are organisms in the water that may bite, sting, scratch, claw, or inject substances into the body.

4. There are other water related problems that include, but are not limited to reduced visibility, rough water, strong currents, and cold temperature.

5. When diving from a boat a person may be subjected to bodily injury from carelessness due to activity, or related to equipment handling, or from just being present on a boat at sea.

6. The individual diver must realize that he/she is ultimately responsible for his/her own safety. It is clearly the diver's responsiblity to refuse to dive if, in his judgment, conditions are unsafe.

Statement: I am in good physical and mental health and am free from cardiovascular, respiratory, or other diseases or ailments, which could endanger me while diving.

I hereby voluntarily exempt and release_____ and Woods Hole Oceanographic Institution, its Trustees, officers and employees, from liability for personal injury, property damage, or death, arising from diving instruction, diving activities or any activities incidental to diving operations.

Signed_____ Date_____
Candidate

Signed_____ Date_____
Diving Supervisor

AI.I.MH (MEDICAL HISTORY) TO BE FILLED IN BY CANDIDATE

1. SURNAME	OTHER NAMES	2. DATE OF BIRTH
3. ADDRESS	PHONE	4. SINGLE ☐ MARRIED ☐ 5. SEX MALE ☐ FEMALE ☐
6. NEXT OF KIN	ADDRESS	
7. PRINCIPAL OCCUPATION		
8. HAVE YOU ANY DISEASE OR DISABILITY AT PRESENT? ☐ NO ☐ YES	NAME OF CONDITION	
9. ARE YOU TAKING ANY TABLETS, MEDICINES OR OTHER DRUGS? ☐ NO ☐ YES	TYPE OF DRUG	

HAVE YOU EVER SUFFERED OR DO YOU NOW SUFFER FROM ANY OF THE FOLLOWING DISORDERS.

NOTES ON HISTORY

		NO	YES
10.	RHEUMATIC FEVER		
11.	SWOLLEN OR PAINFUL JOINTS		
12.	ANY HEART DISEASE		
13.	HIGH BLOOD PRESSURE		
14.	ABNORMAL SHORTNESS OF BREATH		
15.	BRONCHITIS OR PNEUMONIA		
16.	PLEURISY OR SEVERE CHEST PAINS		
17.	COUGHING UP BLOOD		
18.	T B (CONSUMPTION)		
19.	CHRONIC OR PERSISTENT COUGH		
20.	PNEUMOTHORAX (COLLAPSED LUNG)		
21.	ASTHMA OR WHEEZING		
22.	ANY OTHER CHEST COMPLAINT OR CHEST INJURY OR OPERATION ON CHEST		
23.	HAY FEVER		
24.	SINUSITIS		
25.	ANY OTHER NOSE OR THROAT TROUBLE		
26.	DEAFNESS OR RINGING NOISES IN EAR		
27.	DISCHARGING EARS OR OTHER INFECTION		
28.	OPERATIONS ON EARS		
29.	EYE OR VISUAL PROBLEMS		
30.	WEAR GLASSES		
31.	FAINTING, BLACKOUTS, FITS OR EPILEPSY		
32.	SEVERE HEADACHES OR MIGRAINE		
33.	SLEEPWALKING OR FREQUENT NIGHTMARES		
34.	SEVERE DEPRESSION		
35.	CLAUSTROPHOBIA		
36.	ANY OTHER MENTAL ILLNESS		
37.	KIDNEY OR BLADDER DISEASE		
38.	DIABETES		
39.	INDIGESTION OR PEPTIC ULCER		
40.	VOMITING BLOOD OR RECTAL BLEEDING		
41.	RECURRENT VOMITING OR DIARRHOEA		
42.	JAUNDICE OR HEPATITIS		
43.	MALARIA OR OTHER TROPICAL DISEASE		
44.	VENEREAL DISEASE		
45.	SEVERE LOSS OF WEIGHT		
46.	HERNIA OR RUPTURE		
47.	HAEMORRHOIDS (PILES)		
48.	ANY SKIN DISEASE		
49.	ANY REACTION TO DRUGS OR MEDICINES		
50.	ANY OTHER ALLERGIES		
51.	UNCONSCIOUSNESS		
52.	CONCUSSION OR HEAD INJURY		
53.	ANY MAJOR JOINT OR BACK INJURY		
54.	ANY FRACTURES (BROKEN BONES)		
55.	ANY PARALYSIS OR MUSCULAR WEAKNESS		
56.	DENTURES		
57.	MOTION SICKNESS (CAR, PLANE, SEA)		

MEDICAL HISTORY (CONT'D)

NOTES ON HISTORY

		NO	YES	
58	DO YOU SMOKE			
59	APPROX. NUMBER OF CIGARETTES A DAY			
60	HAVE YOU EVER BEEN REJECTED FOR INSURANCE			
61	HAVE YOU BEEN UNABLE TO WORK FOR MEDICAL REASONS			
62	HAVE YOU EVER BEEN ON A PENSION			
63	HAVE YOU ANY DISABILITY WHEN FLYING IN AIRCRAFT			
64	HAVE YOU EVER LIVED WITH A PERSON WITH T B			
65	HAS ANY MEMBER OF YOUR FAMILY HAD T B			
66	OR ATTEMPTED SUICIDE			
67	OR HAD MENTAL ILLNESS			
68	OR FITS EPILEPSY			
69	HAVE YOU ANY INCAPACITY DURING PERIODS			(FEMALES ONLY)
70	ARE YOU NOW PREGNANT			(FEMALES ONLY)
71	HAVE YOU BEEN IN HOSPITAL OR A MENTAL INSTITUTE FOR ANY REASON			
72	HAVE YOU HAD ANY OPERATIONS			
73	HAVE YOU ANY OTHER ILLNESS OR INJURY NOT MENTIONED IN THIS LIST			

A1.2. DMH (DIVING MEDICAL HISTORY) TO BE COMPLETED BY CANDIDATE

1.	APPROX. DATE OF FIRST SNORKEL DIVE	
2.	APPROX. DATE OF FIRST COMPRESSED AIR (SCUBA) DIVE	
3.	APPROX. NUMBER OF COMPRESSED AIR DIVES SINCE	
4	GREATEST DEPTH OF ANY DIVE	
5.	LONGEST DURATION OF ANY DIVE	
6	APPROX. DATE OF FIRST DIVE ON MIXED GASES (PRO DIVERS ONLY)	
7	APPROX. NUMBER OF DIVES ON MIXED GASES (PRO DIVERS ONLY)	

HAVE YOU EVER SUFFERED, OR DO YOU NOW SUFFER FROM ANY OF THE FOLLOWING DISORDERS RELATED TO DIVING?

		NO	YES
8.	SEVERE EAR SQUEEZE		
9	RUPTURE OF EARDRUM		
10	DEAFNESS		
11.	GIDDINESS OR DIZZINESS		
12.	SEVERE SINUS SQUEEZE		
13.	SEVERE LUNG SQUEEZE		
14.	RUPTURED LUNG (BURST LUNG)		
15.	EMPHYSEMA		
16.	PNEUMOTHORAX		
17	AIR EMBOLISM		
18.	NITROGEN NARCOSIS		
19	DECOMPRESSION SICKNESS (BENDS)		
20.	NEAR DROWNING		
21.	SEVERE MARINE ANIMAL INJURY		
22.	OXYGEN TOXICITY		
23	CARBON DIOXIDE TOXICITY		
24.	CARBON MONOXIDE TOXICITY		
25.	DYSBARIC OSTEONECROSIS (BONES)		
26	ANY OTHER DIVING INCIDENTS		

I CERTIFY THAT THE ABOVE INFORMATION IS TRUE AND COMPLETE TO THE BEST OF MY KNOWLEDGE

A1.3.ME (MEDICAL EXAMINATION) TO BE COMPLETED BY MEDICAL PRACTITIONER

1. Physique Good Average Poor	2. Height cm ins	3. Weight kg lbs	4. Colour Eyes Hair Skin	5. Expansion Exp cm ins Insp cm ins Diff. cm ins
6. Vision R6/ Corr 6/ L6/ Corr 6/	7. Colour Perception	8. Urinalysis Albumen Glucose		9. Chest X-ray Date..... Place..... Result.....

10. Skeletal (Long Bone) X-ray Date ..... Place ..... Result ..... (Pro divers only)	11. Respiratory Function Test Vital Capacity ..... After ..... FEV1.0 ..... Broncho ..... Percentage ..... Dilator .....

12. Audiometry

		Frequency Hz						
		250	500	1000	2000	4000	6000	8000
Air	Loss in dB (R)							
	Loss in dB (L)							
Bone	Loss in dB (R)							
	Loss in dB (L)							
REMARKS								

CLINICAL EXAMINATION	Normal	Abnormal	NOTES ON ABNORMALITIES
13. HEAD, SCALP, FACE AND NECK			
14. NOSE, SEPTUM AIRWAY			
15. SINUSES			
16. MOUTH, THROAT, TEETH, SPEECH			
17. EARS GENERAL			
18. TYMPANIC MEMBRANE			
19. EUSTACHIAN TUBE FUNCTION			
20. PUPILLARY REFLEXES			
21. EYE MOVEMENTS			
22. VISUAL FIELDS			
23. ABDOMEN AND G.I. TRACT			
24. ENDOCRINE SYSTEM			
25. LYMPHATIC SYSTEM			
26. POSTURE AND GAIT			
27. SPINE			
28. UPPER LIMBS			
29. LOWER LIMBS			
30. CRANIAL NERVES			
31. REFLEXES			
32. SENSATION			
33. CEREBELLAR FUNCTIONS			
34. EMOTIONAL STABILITY, PHOBIA			
35. MENTAL CAPACITY			
36. IDENTIFYING MARKS			
37. CHEST, LUNG FIELDS			
38. CARDIAC AUSCULTATION			
39. VASCULAR SYSTEM			
40. OPHTHALMOSCOPY			
41. EXERCISE CAPACITY			
42. ECG AT REST			
44. BLOOD PRESSURE			
45. PULSE RATE/MIN			
46. SHARPENED ROMBERG SCORE		SECS	

FIT TO DIVE
UNFIT TO DIVE
OTHER
REASONS:

SIGNED: DATE:

DIVING MEDICAL EXAMINATION

TO EXAMINING PHYSICIAN:

This person is an applicant for training or employment involving diving with self-contained underwater breathing apparatus (SCUBA) or surface-supplied equipment. Your opinion of the applicant's physical fitness is requested. A report form and completed medical questionnaire are enclosed. Since the information requested may be of importance in preventing or treating a diving accident, please be as specific as possible in detailing your results and comments. Please bear in mind that diving involves a number of unusual medical problems:

Diving may involve heavy exertion and immersion in cold water. A diver must be in good general health, free from cardiovascular and respiratory disease, and have good exercise tolerance.

Diving involves significant changes in ambient pressure and gas volume. All body spaces must equalize pressure readily. Obstructive lung disease may cause catastrophic accidents on ascent.

Even momentary impairment of consciousness underwater may be fatal.

Responsibility to other divers is a consideration. Even if a diver were willing to take a calculated risk with his own safety, if an accident occurred, other divers would be at risk in attempting rescue. In addition, evidence of neurotic trends, recklessness, accident proneness, panicky behavior or questionable motivation should be evaluated.

ABSOLUTE CONTRAINDICATIONS TO DIVING (The following are examples of conditions which present unacceptable risks to health and safety while diving):

History of seizure disorder (except febrile convulsions in infancy)

Recurrent or unexplained syncope, whether neurogenic or cardiovascular

Insulin-dependent diabetes

Sickle cell disease

Meniere's disease

Active asthma if medication is required for control, if there have been attacks within the past two years, or if bronchospasm has ever been associated with exertion or inhalation of cold air

Ear surgery where prosthesis has been implanted in the conduction chain

History of spontaneous pneumothorax

Chronic inability to equalize pressure in middle ears or sinuses; unhealed perforation of tympanic membrane

Pulmonary cysts, blebs, bullae, or definite air trapping lesions detected by x-ray; significant obstructive pulmonary disease

History of coronary artery disease; myocardial infarction; arrythmias; ventricular septal defect

Chronic alcoholism or drug addiction

RELATIVE CONTRAINDICATIONS TO DIVING (The following are examples of conditions which may disqualify, limit, or restrict diving depending on severity, presence of residual effects, response to therapy, etc.):

Any condition requiring continuous medication for control (e.g., antihistamines, steroids, barbiturates, mood altering drugs, antihypertensive drugs)

Pregnancy

Decreased pulmonary reserve from any cause

Obesity

Malignancies, unless treated and without recurrance for five years

History of chest surgery; recent operations

TEMPORARY DISQUALIFICATIONS

Upper or lower respiratory infection or severe hay fever causing inability to equalize pressure in ears or sinuses, or causing chest congestion; middle ear infection

Inguinal hernia

Minor perforation of tympanic membrane

Alcohol or drug intoxication

Any medication which could interfere with normal diving

Divers often enter polluted water and are subject to injuries requiring antitetanus treatment. It is strongly advisable to maintain routine immunizations up-to-date.

If you feel the need for additional tests beyond those outlined in the attached form or for consultation, please contact the W.H.O.I. Diving Safety Officer or Institution Safety Officer. It may be in the Institution's best interest to discontinue the person's participation in diving activities.

For a more complete treatment of medical standards for diving, please refer to:

Davis, J.E., Kindwall, E.P., and Youngblood, D.A., "Selection of Divers: Examination and Physical Standards," in Hyperbaric & Undersea Medicine, J.E. Davis, ed., 1981, 1:3, pp. 2-7, Medical Seminars, Inc., 8480 Fredericksburg Road, #241, San Antonio, TX 78229.

Strauss, Richard H., ed., Diving Medicine, 1976, Grune & Stratton, NY, pp. 341-347.

Signs and symptoms of some diving accidents may mimic those of stroke or heart attack. The possibility of decompression sickness or gas embolism should be considered for any patient exhibiting neurological deficit (e.g., unconsciousness, paralysis, weakness, confusion, inability to control bowels or urine, chest pain, etc.) within minutes to hours after diving (as shallow as 4 feet). The National Diving Accident Network (D.A.N.), Duke University Medical Center, (919) 684-8111, may be called at any time for consultation regarding diagnosis, immediate care, transportation to a hyperbaric facility, and chamber location. Please retain the above number for your future reference.

_____

Diving Safety Officer
(617) 548-1400, X2239

WOODS HOLE OCEANOGRAPHIC INSTITUTION
PHYSICIAN'S REPORT OF DIVING MEDICAL EXAMINATION

Applicant's Name_____ Physician's Phone ( )_____
Physician's Name_____ Address_____
(print, type, or stamp)

TYPE OF EXAMINATION: ___INITIAL ___ANNUAL ___SPECIAL (MAJOR ILLNESS OR INJURY)

CLINICAL EVALUATION	NORMAL	ABNORMAL	RESULTS, COMMENTS (Please be specific)
General Physcial Condition			
Ears, Nose, Throat			
Chest X-Ray (initial, once/4 years)			
EGG (initial, annual age 40 & over)			
Visual Acuity			
Color Blindness (initial exam only)			
Hearing			
Hematocrit or Hemoglobin			
White Blood Cell Count			
Urinalysis			
Other as Determined by Examining Physician (please specify)			

The following conditions should be made known to any physician who may treat this person for a diving accident (include medical conditions, medication, allergies, etc.);

Opinion, disqualifications, limitations, temporary restrictions, comments:

___ APPROVED (I find no defects which I consider incompatible with diving)

___ CONDITIONAL APPROVAL (I do not consider diving to be in the applicant's best interests, but find no defects which present a marked risk. I have explained this to the applicant)

___ DISAPPROVED (The applicant has defects which in my opinion would constitute unacceptable hazards to health & safety in diving. I have explained and discussed this with the applicant)

Physician's Signature_____ Applicant's Signature_____
Date_____ Date_____

WOODS HOLE OCEANOGRAPHIC INSTITUTION
DIVING MEDICAL QUESTIONNAIRE & HEALTH HISTORY

INSTRUCTIONS: Please answer the following questions as accurately as possible. Be sure all blanks are filled in completely, sign and date, and return to the Diving Safety Officer. Incomplete forms will be returned and authorization to dive may be unnecessarily delayed.

NAME_____ AGE_____ OCCUPATION_____

DEPARTMENT_____ PROJECT NUMBER_____

HEIGHT_____ WEIGHT_____

1. Have you had any previous experience in diving? Yes_____ No_____
   If so, have you ever had bends, embolism or an other pressure related injury? Yes_____ No_____
2. Have you had any difficulty equalizing pressure in your ears or sinuses? Yes_____ No_____
3. What do you do for exercise? How often do you participate? (over)
4. Have you ever been rejected for service or employment for medical reasons? Yes_____ No_____
5. Date of last physical examination_____ Physician/Facility_____
   Address_____
6. Date of last chest X-ray_____ EKG_____
7. Have you ever had an electrocardiogram? Yes_____ No_____
   Electroencephalogram? Yes_____ No_____
8. Do you smoke? Yes_____ No_____ How much?_____
9. Have you ever had or do you now have: (Please check at left of each item)

Yes	No		Yes	No	
_____		Frequent colds or sore throat	_____		Hay fever or sinus trouble
_____		Trouble breathing through nose			Painful, running ear, mastoid trouble
_____		Ruptured eardrum	_____		Chest pain, persistant cough
_____		Fast or irregular heartbeat	_____		Heart trouble
_____		High or low blood pressure	_____		Persistant back or stomach ache
_____		Frequent diarrhea, bloody stools	_____		Frequent upset stomach, heart burn, ulcers
_____		Kidney or bladder disease	_____		Tuberculosis
_____		Recent gain or loss of weight	_____		Venereal disease
_____		Jaundice or hepatitis	_____		Rheumatism, arthritis, joint trouble
_____		Rheumatic fever	_____		Insomnia, nightmares, sleepwalking
_____		Broken bone, serious sprain	_____		Dizziness, fainting, convulsions
_____		Severe or frequent headaches, migraines	_____		Claustrophobia
_____		Head injury causing unconsciousness	_____		Any neurological condition
_____		Nervous breakdown, depression	_____		Diabetes
_____		Motion sickness	_____		Cancer
_____		Alcohol, drug, narcotic habit			
_____		Adverse reaction to serum, drug or medicine			
_____		Any serious illness not mentioned above			

Application number: .....

APPENDIX 10



CONFÉDÉRATION MONDIALE DES ACTIVITÉS SUBAQUATIQUES
WORLD CONFEDERATION OF UNDERWATER ACTIVITIES

SCIENTIFIC COMMITTEE

President
N.C. Flemming, UK.
Vice-President,
A. Bachrach, USA.
Secretary,
L-A. Rundblad, Sweden.

CMAS Head Office
34 Rue du Colisée
75008, Paris, France.

Note: Application may be made on a photocopy of this form.

APPLICATION FORM FOR CMAS SCIENTIFIC DIVER BREVET

PART I. TO BE COMPLETED BY THE APPLICANT

1. NAME OF APPLICANT (Please Print) .....
2. ADDRESS OF APPLICANT (Please Print) .....
   .....
   .....
   Country .....
3. STATEMENT OF DIVING TRAINING

   Please complete A *or* both of the following sections A and B:

   A. I..... (name) certify that I am in possession of CMAS 3-star diver certificate number ..... issued to me in may name by the national diving federation or organisation of ..... (country). The name of the national diving federation or organisation which issued my certificate is ..... (name of federation or organisation).

   B. I..... (name) certify that I am in possession of government approved training certificate number ..... see section 5A for full details of my training.

   Note. Delete section . . B if not applicable.
4. STATEMENT OF SCIENTIFIC AFFILIATION

   Please complete one *or* both of the following sections A and B:

   A. I certify that I am a member of the national Scientific Diving Association of ..... (country). The name of the national Scientific Diving Association is ..... (See PART II).

   B. I certify that I am a lecturer/teacher/research worker/technician/research student/student* at the following establishment of learning or research: .....
   .....
   (name and address of establishment). I certify that I use diving in my studies or research, and this is permitted by the establishment. (See PART III).

   Notes. Delete section A or B if not applicable.
   * Delete words not applicable.
5. STATEMENT OF LEGAL STATUS

   Please complete *one* of the following sections:

   A. In ..... (country), which is the country where I hold my diving qualifications and where I conduct my studies and/or research, I have the legal status of a diver who dives at work. The government of ..... (country) requires scientific divers at work to possess government-approved diving training and a government-approved certificate permitting them to dive at work. I certify that I hold government-approved diving training certificate number ....., issued on ..... (date), at ..... (place of issue), and that I am legally permitted to dive as a scientific diver at work in ..... (country). A copy of my certificate is attached.

   B. In ..... (country), which is the country where I hold my diving qualifications and where I conduct my studies and/or research, there is no law which requires scientific divers who dive in the course of their work to hold a government-approved certificate of training. In ..... (country) sports diving qualifications are legally sufficient to qualify me to dive in the course of scientific work.

   Note. Delete the paragraph not applicable.

6. DECLARATION

I declare that all the statements above are true to the best of my knowledge on this date. I understand that the CMAS Scientific Diver Certificate does not entitle me to be employed as a commercial or industrial diver.

Signed ..... (Applicant)

Date .....

IMPORTANT: PART I MUST BE COMPLETED AND SIGNED BY THE APPLICANT BEFORE PARTS II OR III ARE SIGNED BY THE SUPPORTING ASSOCIATION OR ESTABLISHMENT.

COMPLETE PART II OR PART III OR BOTH

PART II. TO BE COMPLETED BY THE SUPPORTING SCIENTIFIC DIVING ASSOCIATION

7. To be completed by the Chairman, President, or Secretary of the national Scientific Diving Association cited in section 4A above.

Name and Address of Association (Please Print) .....

.....

..... Country: .....

8. I certify that ..... (name of applicant, please print) is a member of ..... (name of Scientific Diving Association).

9. I have read Part I of this form completed and signed by the applicant.

Signed ..... (Chairman/President/ Secretary).

Date .....

PART III. TO BE COMPLETED BY THE SUPPORTING ESTABLISHMENT OF LEARNING OR RESEARCH

10. To be completed by the Head of Department of the establishment cited in section 4B above.

Name and address of the establishment where the applicant works or is a student: .....

.....

..... Country: .....

11. I certify that ..... (name of applicant, please print) is a lecturer/teacher/research worker/research student/technician/student* at this establishment.

Note. * Delete words not applicable.

12. I have read Part I of this form completed and signed by the applicant.

Signed ..... (Head of Department)

Date .....

Department Stamp: .....

13. The completed form, together with supporting signatures in Parts II or III, and the copy of the official government-approved certificate (if referred to in paragraph 5A) should be posted to the following address; together with payment by cheque of 80 French Francs or an International Money Order for 80 French Francs (payable to CMAS).

CMAS
Scientific Diver Brevet,
34 Rue du Colisée,
75008
PARIS
FRANCE

APPENDIX 11. EXTENDED LOCAL RULES

Statutory legislation concerning diving safety sometimes requires that an employer or insititute publish a set or rules or internal regulations, stating their standards and methods for maintaining safety. It can be time-consuming and unnecessary for numerous laboratories and institutes all to write separate rules starting from first principles, and the resulting variability may even be dangerous and prevent movement of divers between laboratories. It may therefore be preferable for universities, institutes, or laboratories to publish a statement of policy that the UNESCO/CMAS Code of Practice will apply to diving carried out by their employees and students, supplemented by such manuals or standards as may be suitable to cover the detailed conditions of equipment and environment required by national legislation. This will ensure maximum compatibility.

From time to time it may then be necessary for the employing institution to publish extensions or variations of the rules, but maintaining the continuity of statutory authority. Such extensions of the rules could cover matters such as diving at weekends when a recompression chamber was not manned, diving in exceptionally dangerous locations such as in a tidal race, or near reefs and headlands, or diving in shipping lanes, etc. Such local rules would be completely specific to a given diving area or establishment. The following formula is suggested:

INSTITUTE NAME EMPLOYING SCIENTIFIC DIVERS.....

LOCAL DIVING RULES, NOTICE NUMBER.....**DATE**.....

WHEREAS the*

.....

requires every Employer of Scientific Divers to produce or publish a set of Diving Rules, the contents of which whall be consistent with the legislation,

AND WHEREAS The UNESCO/CMAS Code of Practice for Scientific Diving is applied in this institution/university/laboratory/establishment and is part of the agreed Diving Rules, together with the following documents:

..... (Codes of Practice or Standards)

..... (Manuals and Training Standards)

THE FOLLOWING EXTENSION OF THE RULES IS HEREBY BROUGHT TO THE ATTENTION OF DIVERS:

.....

.....

* Title of national legisaltion requiring employers to publish safety rules.

Signed.....

Diving Officer/Diving Control Board

APPENDIX 12. SAMPLE DIVE RECORD SHEETS

This Appendix contains examples of daily and monthly dive record forms, and institutional records.

Example 1 (UBC) p.239

Example 2 (UASR) p.241

Example 3 (NERC) p.242

EXAMPLE 1

Monthly Log

Monthly logs must be completed and turned in to the Diving Operations Office at the end of each month of diving. Record all open water dives including recreational dives. Divers must log a minimum of 12 dives per year to remain certified. Additionally at least one dive must be made to the depth of certification every six months to retain certification at that depth.

Directions for Filling Out Log

Location - give the accepted name (e.g., The Cut, Whytecliff Park) or a brief description (e.g., Wall at Orlebar Point) or chart coordinates.

Purpose - specify the scientific purpose(s) of the dive using the following categories:

Biology	(BI)	Oceanography	(OC)
Chemistry	(CH)	Training	(TR)
Geology	(GE)	Other: Specify	
Archaeology	(AR)		

Mission - specify the mission(s) of the dive using the following categories:

Observation/Recording	(OR)	Installation/Maintenance	(IM)
Surveying	(SU)	Photography	(PH)
Collection/Sampling	(CS)	Recreation	(RE)
Coring	(CO)	Other: Specify	

Dive Buddy(ies) - give the name(s) of your buddy(ies).

Depth Group - put a check mark in the appropriate box to indicate the depth group (in meters) of the maximum depth of the dive (e.g., maximum depth 55 feet - check box for 20 meters).

Dive Time - give time underwater for scuba or umbilical (surface supply) dives; time in water for snorkel dives. Time should be in hours and minutes (e.g., 0:55).

Mode - specify the principal diving mode of the dive using the following categories:

Scuba-Air	(SA)	Snorkel	(SN)
Umbilical-Air	(UA)	Other: Specify	

Additional Information - list any additional information that is pertinent to the record of the dive using the following categories:

Night	(NI)	Zero-Visibility	(ZV)
Ice	(IC)	Contaminated Water	(CW)
Current	(CU)	Enclosed Spaces	(ES)
Altitude	(AL)	Blue-Water	(BW)
Decompression	(DE) - specify bottom time and depth for decompression schedule used.		
Incident Report Filed	(IR)	Other: Specify	

None - if there is no additional information enter "NONE".

Signature - ensure you have filled out the entire form including your name, the month, and the date of your last medical, then sign and date the form at the bottom and send it to:

University Diving Operations Office
Auditorium Annex, 1924 West Mall
Vancouver, B.C. V6T 1W9

WARNING: If the form is incomplete or unreadable it will be returned for corrections.

Monthly Dive Log - UBC Diving Operations Office

Name_____ Month_____ Date of Last Medical _____

	DATE Dy/Mo/Yr	LOCATION Name, Description or Chart Coord'e	PURPOSE	MISSION	DIVE BUDDY(IES)	DEPTH GROUP (Meters) 10	20	30	40	40+	DIVE TIME	MODE	ADDITIONAL INFORMATION
1.													
2.													
3.													
4.													
5.													
6.													
7.													
8.													
9.													
10.													
11.													
12.													
13.													
14.													
15.													
16.													
17.													
18.													
19.													
20.													

The information above accurately summarizes my diving activity.

Signature _____ Date _____

DIVE INFORMATION (Dive No.)

Name/address of Contractor: .....
.....
Date: .....
Site Location(s): .....
.....
Name(s) of Diving Supervisor(s): .....
Equipment used: SCUBA ..../Surface Demand/Other (state) .....
Breathing mixture used: Compressed Air: ..../Other: (state) .....
Task: (including tools) .....
.....

	Dive 1	Dive 2	Dive 3	Dive 4	Dive 5
Time of leaving surface:	.....	.....	.....	.....	.....
Time of leaving bottom:	.....	.....	.....	.....	.....
Bottom Time (mins):	.....	.....	.....	.....	.....
Time of arrival at surface:	.....	.....	.....	.....	.....
Maximum Depth (m):	.....	.....	.....	.....	.....
Stops at ....(depth). Time:	.....	.....	.....	.....	.....
Stops at ....(depth). Time:	.....	.....	.....	.....	.....

Decompression implemented? No/Yes
RNPL/BS-AC: .... USN: ..../Other: .....

Any decompression sickness?: Yes/No
Any other illness/discomfort/injury?: Yes/No
Any adverse health and safety factors?: Yes/No
Action/comments (if "yes"):
.....
.....
.....

Signed: Diver ..... Supervisor .....

ALL THE INFORMATION ABOVE IS REQUIRED BY LAW AND MUST BE COMPLETED FOR EACH DIVE OR GROUP OF DIVES

ADDITIONAL NOTES:

Name(s) of diving companion(s): .....
.....

WATER: *Visibility (m)* ..... *Temp (C)* .....
Current (kt) ..... *Tide* ..... *Swell* .....

WEATHER: *Temp (C)* ..... *Wind* ..... *Cloud* .....
Visibility ..... *Precipitation* .....
Comments:

SCIENTIFIC OBSERVATIONS

DIVE RECORDS

Dive No.....

Name and address of University, Institute, School, Museum, etc.

.....

Dive Date .....Geographical Location .....

Vessel/Structure/Platform.....

Marshall/Supervisor.....Dive Companion Dive 1 .....

Equipment used .....Dive Companion Dive 2 .....

.....Dive Companion Dive 3 .....

Surface line attendant Dive 1..... Dive 2..... Dive 3.....

STOPS

	Leave Surface	Arrive Bottom	Leave Bottom	Arrive 10m	Leave 10m	Arrive 5m	Leave 5m	Arrive Surface	Max Depth	Bottom Time	Total Time
DIVE ONE											
DIVE TWO											
DIVE THREE											

Decompression Tables used .....

Brief work description.....

.....

Any decompression sickness or other illness or adverse effects

.....

Defects of equipment.....

.....

Adverse environmental factors .....

Diver's Signature.....

On-site Dive Marshall's Signature .....

Chief Diver's Signature.....

ADDITIONAL INFORMATION Project name or number.....

Chief Scientist.....

Water Conditions: Depth to Bottom..... Surface Temp .....

Bottom Temp ..... Current..... Tide .....

Visibility.....Waves/Sea State.....

Weather Conditions: Air Temp..... Cloud.....

Wind..... Fog ..... Precipitation .....

Institute or Department Diving Officer or Chief Diver observations for Diving Operations Log Book, including arrangements for emergency support.

.....

.....

Signature .....Date .....

Scientific or Archaeological Observations **Dive No** .....

APPENDIX 13. SCIENCE DIVER TRAINING STANDARDS AND CERTIFICATION

Training and certification can be carried out within sports diving clubs affilliated to national or international bodies, military organizations, or within institutions that maintain diving programs. Commonly national scientific diving organizations will recognize some level of training and/or experience as a sufficient basic training standard.

Certification can be by made the national or international body or through a recognized institute that maintains training and certification programs. In most cases, certificates will have some national level of significance. In the opinion of the editors, it is not necessary to have a single set certification standard, so long as there is good agreement between the certifying authorities as to levels of training and competency necessary at the different levels.

Two levels of scientific diver certification may be the simplest approach; "diver-in-training" and certified Scientific Diver. The "diver-in-training" requirements would essentially be those for an entry level diver (NAUI Level II, CMAS 2-Star) and restrictions would be placed on the respective diver's activities (ie. maximum depth 20 meters, supervised directly by a certified Scientific Diver). It is not intended that divers would be required to dive to certain depths each month to maintain this standard for scientific diving, but they might be required to do so for institutional or other certificate requirements.

The certified Scientific Diver requirements would be those equivalent to an advanced sports diver level (NAUI Level IV, CMAS 3-Star) with the certification of the Diving Officer, and there will be no direct restrictions placed on the diver's activities other than those indicated by the Diving Officer. However, a cautionary note would indicate the need for advanced training when undertaking diving in extreme conditions or when utilizing equipment other than self-contained air-breathing aparatus.

Examples of a statement of understanding between the institute and the diver, an application form for training, and an institution temporary permit for visiting investigators are supplied.

WOODS HOLE OCEANOGRAPHIC INSTITUTION
DIVING TRAINING/CERTIFICATION

STATEMENT OF UNDERSTANDING

To be completed by candidates for diver training

STANDARD: All areas of evaluation of this course are based on the question, "Will this person make a safe and reliable diver?"

EVALUATION: You will be required to learn and demonstrate to the satisfaction of the diving supervisor, through written/oral examination(s) and physical performance, the following:

1) Applied Sciences: physics, physiology and medical aspects as they relate to a diver's performance in the water.
2) Diving Equipment: a basic knowledge of the purposes, features, types and use of skin and SCUBA diving equipment.
3) Diving Safety: a basic knowledge and skill level of lifesaving and first aid as applied to diving.
4) Diving Environment: a basic knowledge of the physical and biological aspects, with particular emphasis of the New England region, and including regulations, dangers, water movement and characteristics, and conservation.
5) Safe Diving Skills: competent knowledge and performance of skin and SCUBA pre and post diving, surface, and underwater skills.

Your attitude during the course will affect your individual scores and final status.

CERTIFICATION: You are not assured of certification to dive for Woods Hole Oceanographic Institution merely by attending the course, or even by completing or passing all of the areas of evaluation. The Diving Safety Officer will make a subjective decision at the end of the course, based on your total performance and attitude. Possible classifications are as follows:

1) Professional Diver.
2) Certification to depth level based upon prior training and experience, as well as performance and attitude.
3) Placement in another class for further training.
4) Rejection for diving certification.

RESPONSIBILITIES: You will have several responsibilities during the course. These will include:

1) Your responsibility for your own safety and the safety of others around you.
2) Your individual responsiblity to Woods Hole Oceanographic Institution for damages or missing items.
3) Your responsibility for your own equipment and personal effects.

Signed_____ Date_____
Candidate

Signed_____ Date_____
Diving Supervisor

WOODS HOLE OCEANOGRAPHIC INSTITUTION

APPLICATION FOR SCUBA DIVING TRAINING/CERTIFICATION

INSTRUCTIONS: SCUBA diving training/certification is available for approved W.H.O.I. affiliated individuals who need to use the technique to further their research at the Institution or for support activities related to Institution business. Requirements for eligibility and procedures for application may be found in the W.H.O.I. Diving Safety Manual.

Please fill in the requested information as completely as possible. Print legibly or type. Incomplete, missing or late application forms or supporting documentation may result in unnecessary delays or in rejection for training. Attach the requested enclosures and return to the Diving Locker.

PERSONAL INFORMATION: Name_____Date of Birth_____
Job Title or Major_____Department _____
Office/Lab Location_____Ext._____Home Phone _____
Mailing Address_____

DESCRIPTION OF NEED FOR DIVING TRAINING/CERTIFICATION: Briefly describe project for which you will use diving at the Institution. Temporary Permit Applicants include location and dates of cruise/operation_____

TRAINING:

SCUBA Courses Completed

____I have never completed a SCUBA course.____I have completed the following courses:

Course Title or Level	Agency (NAUI, Padi, YMCA, etc)	Location	Total Hours			Date of Completion	Instructor's Name & #
			Lecture	Pool	Open Water		

CPR, First Aid, Lifesaving, Swimming, W.S.I., Boating, etc.

EXPERIENCE: Total Career Open Water SCUBA Dives_____Total Hours Underwater_____
Maximum Depth (Career)_____ Maximum Depth (Last Year)_____No. Dives Past Year_____
Date of Last Open Water Dive_____Have You Ever Dived for W.H.O.I.? _____
Date Certified_____Date Left_____Swimming Experience: _____ Nonswimmer_____
Swimmer _____ years Year Last Swam _____Snorkeling Experience: _____
Nonsnorkeler _____ years Year Last Snorkeled _____

Brief resume of any commercial, military, or scientific diving experience. Include names of supervisors, companies/universities/units for which you worked, dates of affiliation, and duties. Include all diving related skills not noted above:

indicate with the appropriate letter if you have ever had experience diving in the following situations: E Extensive (more than 20 times) L Limited (1-4 times)
M Moderate (5-20 times) _ Leave blank if inexperienced

___Diving from boats/ships
___Small boats (up to 20' length)
___Vessels from 21' to 100'
___Ships (over 100')
___Shore diving
___Rocks or 'ironshore'
___Surf
___Penetration w/o direct access to surface
___Ice diving
___Cave diving
___Wreck diving
___Night diving
___Decompression diving
___Diving at sea ('blue water')
___Diving EMT or chamber operator

___Cold water (below 45°F)
___Turbid water (0-5' visibility)
___Very clear water (50' visibility)
___Diving in salt water
___Diving in fresh water
___Ponds, lakes, quarries
___Rivers
___Mud or silty bottom
___Kelp 'forest'
___Coral reef
___Currents (1/2 knot and over)
___Altitude diving (over 2,000' elevation)
___Use of variable volume dry suits, Unisuit, etc.
___Commercial diving
___Surface-supplied equipment
___Saturation or mixed gas

ENCLOSURES: Enclose the following supporting documents with this application:

1) Physical Examination Report. Must have been signed within the past year, marked "Approved for Diving," and signed by a licensed physician.
2) Copies of all pertinent certification cards (front and reverse).
3) A dive log must be presented for inspection (certified divers only).

STATEMENT: I certify that the above information is correct and that I am in good health. I agree to follow the safety regulations of the W.H.O.I. Diving Safety Manual and to abide by whatever limitation or restriction may be imposed by the Diving Safety Officer.

_____ _____
Signature of Candidate Date

APPROVAL: The following persons must endorse the candidate's participation in the W.H.O.I. diving program before training or certification can commence:

	Name (printed or typed)	Signature	Date
Project Supervisor	_____	_____	_____
Department Chairman	_____	_____	_____
Diving Safety Officer	_____	_____	_____
Diving Board Chairman	_____	_____	_____

DO NOT WRITE BELOW LINE

TRAINING/CERTIFICATION PROCEDURE ASSIGNED:

___ Basic/Refresher Course _____ Class Convening Date_____
___ Experienced Diver Evaluation
___ Reciprocal Certification From Approved University/Institution Diving Program
___ Temporary Diving Permit. Expiration Date_____ Commencement Date _____
___ Rejection

REMARKS: Please attach to this form.

WOODS HOLE OCEANOGRAPHIC INSTITUTION

TEMPORARY SCUBA DIVING PERMIT FOR VISITING INVESTIGATORS

Diving at W.H.O.I. is subject to rules and regulations which are outlined in the Woods Hole Oceanographic Institution Diving Safety Manual. Persons who are planning to dive for a W.H.O.I.-sponsored project or cruise, or who plan to use W.H.O.I. facilities (e.g., ships, stations, piers, equipment) for diving operations, must be certified to do so by the Institution Diving Safety Officer.

Authorized visitors may apply for a Temporary Diving Permit. This permit is restricted to participation in the specific diving operation/cruise for which requested, and is subject to such other restrictions (e.g., depth, diving buddy, type of activity or environment, etc.) as the Diving Safety Officer may impose. Temporary permits must be renewed for each project/cruise by persons not affiliated with W.H.O.I.

W.H.O.I. employees and students, or visitors who desire regular Institution certification, must comply with the normal procedures as outlined in the W.H.O.I. Diving Safety Manual. Because of time constraints, Temporary Permit candidates may have portions of the procedures waived or simplified; however, in the interest of safety, certain minimal requirements must be met. The Diving Safety Officer may impose other requirements in addition to the following at his discretion:

Health: The visiting diver must provide documentation of having passed a physical examination for diving within one year of the commencement of the diving operation. As a minimum, the examination form should include a statement that the candidate is medically qualified for diving, the signature of the examining physician, the physician's name, address and phone (printed or typed), and a statement describing any condition extant or medication currently taken which could affect or restrict the candidate's ability to dive safely. The W.H.O.I. medical form is available on request.

Training: A certification card from a nationally recognized diver training agency (e.g., NAUI, PADI, YMCA, NASDS, SSI) must be submitted. A Xerox (front and back) copy will suffice.

Experience: A log recording at least 12 career open water dives, with at least 8 having been accomplished within the past year must be submitted.

If a visitor is affiliated with a university or institution with a formal diving program (i.e., with a diving control board and a diving safety manual), a letter from the Diving Safety Officer certifying that the candidate is currently qualified and conforms to the above requirements may suffice.

Please fill in the requested information on the reverse of this form, attach the necessary documentation, and send as a package to the Principal Investigator for whom you will be working at W.H.O.I. Visitors who have participated in W.H.O.I. sponsored diving operations within the past year may already have some of the above documentation on file with the Institution Diving Safety Officer. However, it is the visitor's responsibility to ensure that all requirements are up to date and submitted with sufficient lead time to be processed.

_____

Diving Safety Officer

APPLICATION FOR TEMPORARY WHOI DIVING PERMIT

INSTRUCTIONS: Fill in the requested information as completely as possible. Print legibly or type. Incomplete, missing or late forms or documentation may result in unnecessary delays or rejection.

PERSONAL INFORMATION: Name _____ Age _____ Sex _____
Occupation or Major _____
Work/University Address _____

TRAINING:

	Course Title or Level	Agency (NAUI, etc.)	Location	Date of Completion	Instructor's Name
CPR					
1st Aid					
Diving					

EXPERIENCE: Total Career SCUBA Dives _____ Total Hours Underwater ____
Maximum Depth (Career)_____ Maximum Depth (Last Year)_____ No. Dives Past Year ____
Have you ever dived for W.H.O.I.? _____ When? (month, year) _____

Indicate with the appropriate letter if you have ever had experience diving in the following situations: E Extensive (more than 20 times) L Limited (1-4 times) M Moderate (5-20 times) ___ (leave blank if inexperienced

___Diving from boats/ships
___Small boats (up to 20' length)
___Vessels from 21' to 100'
___Ships (over 100')
___Shore diving
___Rocks or 'ironshore'
___Surf
___Penetration w/o direct access to surface
___Ice diving
___Cave diving
___Wreck diving
___Night diving
___Decompression diving
___Diving at sea ('blue water')
___Diving EMT or chamber operator

___Cold water (below 45°F)
___Turbid water (0-5' visibility)
___Very clear water (> 50' visibility)
___Diving in salt water
___Diving in fresh water
___Ponds, lakes, quarries
___Rivers
___Mud or silty bottom
___Kelp 'forest'
___Coral reef
___Currents (1/2 knot and over)
___Altitude diving (over 2,000' elevation)
___Use of variable volume dry suits, Unisuit, etc.
___Commercial diving
___Surface-supplied equipment
___Saturation or mixed gas

CRUISE/DIVING OPERATION INFORMATION: Brief description of the diving operation: _____

Principal Investigator for whom you will be working at W.H.O.I._____
Location of diving operation _____
Date(s) of diving operation _____

I certify that the above information is correct and that I am in good health. I agree to follow the safety regulations of the W.H.O.I. Diving Safety Manual and to abide by whatever limitation or restriction may be imposed by cognizant W.H.O.I. Diving authorities, including the Diving Safety Officer.

_____ _____
Signature of Candidate Date

APPENDIX 14. GLOSSARY OF SELECTED TERMS AND DEFINITIONS

This glossary is not a complete glossary of diving terms, but is a list of some terms and acronyms used in this code. A complete glossary of American diving terminology has been published by the Best Publishing Company, Post Office Box 1978, San Pedro, California 90723, U.S.A. Terms are also usually defined with legal precision in the preamble to government legislation, but the meanings may vary slightly from document to document and from country to country.

AAUS: American Academy of Underwater Sciences.

AB: Adjustable Buoyancy.

ABLJ: Adjustable buoyancy life jacket (vest, compensator). A life jacket which supports the diver safely on the surface with his/her face above water, and can be inflated using a hand controlled valve whilst submerged, using air either from direct feed, or from a separate cyliner.

ATA: Atmospheres Absolute.

BIBS: Built In Breathing System.

BSAC: British Sub Aqua Club.

CAUS: Canadian Association for Underwater Sciences.

Cd: Cadmium.

CIRIA: Construction Industry Research and Information Association (Britain).

CIRSS: Comitato Italiano Ricerche Studi Subacquei (Italy).

Closed circuit: A breathing system within which the gas is re-circulated so that all the oxygen is used metabolically by the diver, and the exhaled carbon dioxide is absorbed in a chemical filter.

CMAS: Confédération Mondiale des Activités Subaquatiques (World Underwater Federation).

CNR: Consiglio Nazionale dell Ricerche (Italy).

CO_2: Carbon dioxide.

DCB: Diving Control Board.

DCS: Decompression Sickness.

DF: Direct feed. An intermediate pressure air hose with diver control for feeding breathing air from the main air bottle to ABLJ, for dry suit inflation, or other purposes.

DPV: Diver Propulsion Vehicle.

EAR: Expired Air Resuscitation.

EEZ: Exclusive Economic Zone.

f.s.w.: Feet of sea water.

H_2: Hydrogen gas.

H_2O: Water.

He: Helium.

Heliox: A breathing gas consisting of a mixture of helium and oxygen.

Hg: Mercury.

HP: High Pressure.

Life Jacket: Legally, a life-jacket must be certified as able to support a person safely on the surface of the water with their face above water.

NAUI: National Association of Underwater Instructors.

Ni: Nickel.

Nitrox: A breathing gas consisting of a mixture of nitrogen and oxygen with a compostion in proportions different from that of air.

NOAA: National Oceanographic and Aerospace Administration (U.S.A.).

NSS: National Speleological Society (U.S.A.).

O_2: Oxygen.

Octopus rig: A breathing regulator with two (or more) hoses leading to second stage valves and mouthpieces, so that two (or more) divers can breathe at the same time from the same cylinder. An emergency breathing system.

OSHA: Occupational Safety and Health Administration (U.S.A.).

RCV: Remote Controlled Vehicle.

RNLI: Royal National Lifeboat Institution.

RNPL: Royal Naval Physiological Laboratory.

ROV: Remotely Operated Vehicle.

SCOR: Scientific Committee for Oceanic Research (of ICSU).

SCUBA: The word originated as an acronym for Self Contained Underwater Breathing Apparatus or S.C.U.B.A. Technically it could be used to include any breathing gas or breathing gas delivery system, provided that the diver was carrying the gas supply, without a surface supply. By universal acceptance the term Scuba is used to describe a self-contained breathing set which contains compressed air, and supplies through a demand valve. The word is used in that sense throughout the Code unless it is qualified by a second term. Thus, it is possible to say "oxygen scuba", or "nitrox scuba", to mean a self-contained breathing system providing a gas other than air, with the gas delivery method undefined.

SLJ: Surface Life Jacket. A life jacket commonly worn while snorkeling that has mouth and small emergency CO_2 gas cylinder inflation.

Stabilizer jacket, Stab jacket: An integral byouancy system attached to the divers's back-pack or worn separately, and usually inflated by direct feed. The manufacturer's instructions with these systems usually state that they cannot be treated legally as life-jackets and they should not be used for that purpose.

Surface Supply: A breathing system in which the gas is supplied through a hose from the surface at a higher pressure than the water pressure at the depth of the diver, and the pressure reduced through a demand valve.

Trimix: A breathing gas consisting of oxygen and two inert gasses, usually helium and nitrogen.

UASR: Underwater Association for Scientific Research (Britain).

UBMS: Undersea Biomedical Society (U.S.A.).

UNCLOS: United Nations Convention on the Law of the Sea.

UNESCO: United Nations Educational, Scientific and Cultural Organization.

USN: United States Navy.

UNESCO TECHNICAL PAPERS IN MARINE SCIENCE

Titles of numbers which are out of stock

No.		Year	SCOR WG
1	Incorporated with Nos. 4, 8 and 14 in No. 27	1965	WG 10
2	Report of the first meeting of the joint group of experts on photosynthetic radiant energy held at Moscow, 5-9 October 1964. Sponsored by Unesco, SCOR and IAPO	1965	WG 15
3	Report on the intercalibration measurements in Copenhagen, 9-13 June 1965. Organized by ICES	1966	—
4	Incorporated with Nos. 1,8 and 14 in No. 27	1966	WG 10
5	Report of the second meeting of the joint group of experts on photosynthetic radiant energy held at Kauizawa, 15-19 August 1966. Sponsored by Unesco, SCOR, IAPO	1966	WG 15
6	Report of a meeting of the joint group of experts on radiocarbon estimation of primary production held at Copenhagen, 24-26 October 1966. Sponsored by Unesco, SCOR, ICES	1967	WG 20
7	Report of the second meeting of the Committee for the Check-List of the Fishes of the North Eastern Atlantic and on the Mediterranean, London, 20-22 April 1967	1968	—
8	Incorporated with Nos. 1, 4 and 14 in No. 27	1968	WG 10
9	Report on intercalibration measurements, Leningrad, 24-28 May 1966 and Copenhagen, September 1966; organized by ICES	1969	—
10	Guide to the Indian Ocean Biological Centre (IOBC), Cochin (India), by the Unesco Curator 1967-1969 (Dr. J. Tranter)	1969	—
11	An intercomparison of some current meters, report on an experiment at WHOI Mooring Site "D", 16-24 July 1967 by the Working Group on Continuous Current Velocity Measurements. Sponsored by SCOR, LIAPSO and Unesco	1969	WG 21
12	Check-List of the Fishes of the North-Eastern Atlantic and of the Mediterranean (report of the third meeting of the Committee, Hamburg, April 1969)	1969	—
13	Technical report of sea trials conducted by the working group on photosynthetic radiant energy, Gulf of California, May 1968; sponsored by SCOR, IAPSO, Unesco	1969	WG 15
14	Incorporated with Nos. 1, 4 and 8 in No. 27	1970	WG 10
15	Monitoring life in the ocean, sponsored by SCOR, ACMRR, Unesco, IBP/PM	1973	WG 29
16	Sixth report of the joint panel on oceanographic tables and standards, Kiel, 24-26 January 1973; sponsored by Unesco, ICES, SCOR, IAPSO	1974	WG 10
17	An intercomparison of some current meters, report on an experiment of Research Vessel Akademic Kurchatov, March-April 1970, by the Working Group on Current Velocity Measurements; sponsored by SCOR, IAPSO, Unesco	1974	WG 21
18	A review of methods used for quantitative phytoplankton studies; sponsored by SCOR, Unesco	1974	WG 33
20	Ichthyoplankton. Report of the CICAR Ichthyoplankton Workshop-*Also published in Spanish*	1975	—
21	An intercomparison of open sea tidal pressure sensors. Report of SCOR Working Group 27: "Tides of the open sea"	1975	WG 27
22	European sub-regional co-operation in oceanography. Report of Working Group sponsored by the Unesco Scientific Co-operation Bureau for Europe and the Division of Marine Sciences	1975	—
23	An intercomparison of some currents meters. III. Report on an experiment carried out from the Research Vessel Atlantis II, August-September 1972, by the Working Group on Continuous Velocity Measurements; sponsored by SCOR, IAPSO and Unesco	1975	WG 21
24	Seventh report of the joint panel on oceanographic tables and standards, Grenoble, 2-5 September 1975; sponsored by Unesco, ICES, SCOR, IAPSO	1976	WG 10
27	Collected reports of the joint panel on oceanographic tables and standards, 1964-1969	1976	WG 10
28	Eighth report of the joint panel on oceanographic tables and standards, Woods Hole, U.S.A., sponsored by Unesco, ICES, SCOR, IAPSO	1978	WG 10
29	Committee for the preparation of CLOFETA-Report of the first meeting, Paris, 16-18 January 1978	1979	—
30	Ninth report of the joint panel on oceanographic tables and standards, Unesco, Paris, 11-13 September 1978	1979	—